This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

+ *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.

+ *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.

+ *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.

+ *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at `http://books.google.com/`

NOSTRAND'S SCIENCE SERIES.

50 Cents.

OMPRESSED AIR.

ERIMENTS UPON THE TRANSMISSION OF
WER BY COMPRESSED AIR IN PARIS.
(POPP'S SYSTEM.)

BY

ALEXANDER B. W. KENNEDY,

[illegible]
[illegible]

[illegible]
Stations by Compressed Air.

BY

WILLIAM CAWTHORNE UNWIN,

[illegible]

EDITED BY

F. E. IDELL, M.E.

[illegible] EDITION.

NEW YORK:

VAN NOSTRAND COMPANY,

[illegible]

[illegible]

Mrs. J. F. Schaefer,
26 June 1913

THE VAN NOSTRAND SCIENCE SERIES.

No. 19.—STRENGTH OF BEAMS UNDER TRANSVERSE LOADS. By Prof. W. Allan, author of "Theory of Arches." Second edition, revised.

No. 20.—BRIDGE AND TUNNEL CENTRES. By John B. McMaster, C.E. Second edition.

No. 21.—SAFETY VALVES. Second Edition. By Richard H. Buel, C.E.

No. 22.—HIGH MASONRY DAMS. By E. Sherman Gould, M. Am. Soc. C. E.

No. 23.—THE FATIGUE OF METALS UNDER REPEATED STRAINS. With various Tables of Results and Experiments. From the German of Prof. Ludwig Spangenburgh, with a Preface by S. H. Shreve, A.M.

No. 24.—A PRACTICAL TREATISE ON THE TEETH OF WHEELS. By Prof. S. W. Robinson. Second edition, revised.

No. 25.—ON THE THEORY AND CALCULATION OF CONTINUOUS BRIDGES. By R. M. Wilcox, Ph. D.

No. 26.—PRACTICAL TREATISE ON THE PROPERTIES OF CONTINUOUS BRIDGES. By Charles Bender, C.E.

No. 27.—ON BOILER INCRUSTATION AND CORROSION. By F. J. Rowan. New Ed. Rev. by F. E. Idell.

No. 28.—TRANSMISSION OF POWER BY WIRE ROPES. Second edition. By Albert W. Stahl, U.S.N.

No. 29.—STEAM INJECTORS. Translated from the French of M. Leon Pochet.

No. 30.—TERRESTRIAL MAGNETISM AND THE MAGNETISM OF IRON VESSELS. By Prof. Fairman Rogers.

No. 31.—THE SANITARY CONDITION OF DWELLING-HOUSES IN TOWN AND COUNTRY. By George E. Waring, jun.

No. 32.—CABLE-MAKING FOR SUSPENSION BRIDGES. By W. Hildebrand, C.E.

No. 33.—MECHANICS OF VENTILATION. By George W. Rafter, C.E. New and Revised Edition.

No. 34.—FOUNDATIONS. By Prof. Jules Gaudard, C.E. Second edition. Translated from the French.

No. 35.—THE ANERÓID BAROMETER: ITS CONSTRUCTION AND USE. Compiled by George W. Plympton. Eighth edition.

No. 36.—MATTER AND MOTION. By J. Clerk Maxwell, M.A. Second American edition.

No. 37.—GEOGRAPHICAL SURVEYING: ITS USES, METHODS, AND RESULTS. By Frank De Yeaux Carpenter, C.E.

No. 38.—MAXIMUM STRESSES IN FRAMED BRIDGE By Prof. William Cain, A.M., C.E. New and revised edition.

THE VAN NOSTRAND SCIENCE SERIES.

No. 39.—A HANDBOOK OF THE ELECTRO-MAGNETIC TELEGRAPH. By A. E. Loring.

No. 40.—TRANSMISSION OF POWER BY COMPRESSED AIR. By Robert Zahner, M.E. Second edition.

No. 41.—STRENGTH OF MATERIALS. By William Kent, C.E., Assoc. Editor, *Engineering News*. Second Ed.

No. 42.—THEORY OF STEEL-CONCRETE ARCHES, AND OF VAULTED STRUCTURES. By Prof. William Cain.

No. 43.—WAVE AND VORTEX MOTION. By Dr. Thomas Craig, of Johns Hopkins University.

No. 44.—TURBINE WHEELS. By Prof. W. P. Trowbridge, Columbia College. Second edition. Revised.

No. 45.—THERMODYNAMICS. By Prof. H. T. Eddy, University of Cincinnati.

No. 46.—ICE-MAKING MACHINES. From the French of M. Le Doux. Revised by Prof. Denton.

No. 47.—LINKAGES; THE DIFFERENT FORMS AND USES OF ARTICULATED LINKS. By J. D. C. de Roos.

No. 48.—THEORY OF SOLID AND BRACED ARCHES By William Cain, C.E.

No. 49.—ON THE MOTION OF A SOLID IN A FLUID. By Thomas Craig, Ph.D.

No. 50.—DWELLING-HOUSES: THEIR SANITARY CONSTRUCTION AND ARRANGEMENTS. By Prof. W. H. Corfield.

No. 51.—THE TELESCOPE: ITS CONSTRUCTION, ETC. By Thomas Nolan.

No. 52.—IMAGINARY QUANTITIES. Translated from the French of M. Argand. By Prof. Hardy.

No. 53.—INDUCTION COILS: HOW MADE AND HOW USED. Fifth edition.

No. 54.—KINEMATICS OF MACHINERY. By Prof. Kennedy. With an introduction by Prof. R. H. Thurston.

No. 55.—SEWER GASES: THEIR NATURE AND ORIGIN. By A. de Varona. 2d ed., revised and enlarged.

No. 56.—THE ACTUAL LATERAL PRESSURE OF EARTHWORK. By Benjamin Baker, M. Inst. C.E.

No. 57.—INCANDESCENT ELECTRIC LIGHTING. A Practical Description of the Edison System. By L. H. Latimer, to which is added the Design and Operation of Incandescent Stations. By C. J. Field, and the Maximum Efficiency of Incandescent Lamps, by John W. Howell.

No. 58.—THE VENTILATION OF COAL-MINES. By W. *Fairley*, M.E., F.S.S., and Geo. J. André.

No. 59.—RAILROAD ECONOMICS; OR, NOTES WITH *COMMENTS*. By S. W. Robinson, C.E.

17-1-12

COMPRESSED AIR.

EXPERIMENTS UPON THE TRANSMISSION OF POWER BY COMPRESSED AIR IN PARIS.

(POPP'S SYSTEM.)

BY

ALEXANDER B. W. KENNEDY,

F.R.S., M.INST.C.E., EMERITUS PROFESSOR OF ENGINEERING IN UNIVERSITY COLLEGE, LONDON.

The Transmission and Distribution of Power from Central Stations by Compressed Air.

BY

WILLIAM CAWTHORNE UNWIN,

B.SC., F.R.S., M.INST.C.E.

EDITED BY

F. E. IDELL, M.E.

THIRD EDITION.

NEW YORK:
D. VAN NOSTRAND COMPANY,
23 MURRAY AND 27 WARREN STREETS.
1903.

THE NEW YORK
PUBLIC LIBRARY
651140
ASTOR, LENOX AND
TILDEN FOUNDATIONS.
R 1913 L

PREFACE.

THE transmission of power by compressed air has, in this country, been chiefly confined to tunnelling and mining operations; and while some of the plants for the generation of compressed air are large, no single plant is of such capacity as that in the Central Station of the Paris Compressed Air Co., where there may now be 10,000 horse-power generating compressed air.

A plant is to be erected at Niagara, N. Y., by the Niagara Power Co. There will be a central station for the generation of 5,000 h.p. by compressed air, and another for the generation of 5,000 h.p. by electricity, with the possible extension of either one of these to the amount of 100,000 horse-power. This power will be distributed, as wanted, to the factories on the lands of the company; then to an area within a two-mile radius. The radius will be increased gradually, until an area within a twenty-mile radius is covered. The deductions in Prof. Unwin's paper prove that power can be transmitted this distance without excessive loss of pressure, for he computes that air compressed to an initial pressure of 132 pounds per square inch can be carried a distance of 20 miles in a 30-inch main with a loss of pressure of only 12 per cent, and that from 40 to 50 per cent of the compressing power can be recovered in the motors if the air is used cold, and from 59 to 73 per cent if the air is reheated.

The following papers give the data of and deductions from experiments made by eminent authorities on the Paris system, and are presented to the reader *in extenso.*

F. E. I.

EXPERIMENTS UPON THE TRANSMISSION OF POWER BY COMPRESSED AIR IN PARIS (POPP'S SYSTEM).

By Prof. Alexander B. W. Kennedy,
F.R.S., M. Inst. C. E.

The subject of transmission of power to a distance is one of such immense importance in an industrial country like our own, that I am sure I need offer no apology for bringing this paper before you. In a case such as that which I have to describe, where the distance to which the power is to be transmitted is great enough to be measured in miles, the possible methods of transmission are not very numerous. Steam, water, air, and electricity seem to be the only four agents practically available. All four have been used to a greater or less extent, and with more or less complete success. In our own country the distribution and use of high-pressure water has been carried out with the greatest engineering skill and with correspondingly great success by the Hydraulic Power Company in London, and also in Hull. Electric transmission (for traction at least) has been at work on a small scale for some time in various places, and is about to be tried on a much larger scale on the Southwark Subway. In America it has been very widely used for traction on tramways, and on the Continent it has also been used to a certain extent for power transmission for general purposes. Steam has been used on a large scale in New York, but as yet its success does not seem to be unquestionable. Compressed air has, of course, been used over and over again in rough and uneconomical fashion, in connection with tunnelling and boring work, but I think only two practical attempts have been made to utilize it economically and on a large scale for industrial purposes. Of these two, one has been made in Birmingham and the other in Paris. The Birmingham Compressed Air Power

Company has established works on a very large scale, but various causes have unfortunately combined to cause delay in the commencement of its operations, which indeed are hardly yet fairly started. In Paris, however, the transmission of power by compressed air has been in operation on a somewhat large scale and with very great mechanical success for a few years past. I have recently had occasion to spend some weeks in making experiments in connection with the Paris compressed-air plant, and have been given the fullest permission to publish the results of my experiments. To avoid any misunderstanding, I must premise that it is not my intention to institute any comparison between the different methods of power-transmission which I have mentioned. Such a comparison, to be of any value, would require for itself a paper at least as long as the one which I have to put before you, and is, therefore, in the nature of things impossible here. On this matter I wish to say only one thing, in view of a recent discussion on the Hydraulic Power Company's work in London, in which some comparisons were made between power transmission by air and by water. So far as I see, the two systems at present practically occupy different fields, and overlap but little. The work that each appears to do best is exactly that for which the other is least fitted. I see as little chance for air, just now, taking the place of water for lifts or cranes, as I do for water coming into common use in the driving of motors. I think it would be a pity if there were to be any impression that two systems were antagonistic which, in point of fact, rather supplement each other. Having said this much, I will limit myself to a description of the plant and methods used in Paris, and to a statement of the actual results obtained there, as determined by my own experiments on the spot. The plant and methods are by no means absolutely perfect; they are not only susceptible of, but are now receiving, considerable improvements in detail in the extensions which are being carried out. In what I have to say, however, I shall confine myself entirely to results actually obtained with the present plant, as it was working when I tested it two months ago, not giving it credit for the result of any of the improvements which have not yet been introduced throughout into the system of working. I shall only, after having given this statement of facts, state briefly my views as to the probable practical value of improvements which may be, or are being, carried out.

The work now carried on by the Paris Compressed Air Company has developed from very small beginnings, at first slowly, lately very fast. It originated in a pneumatic clock system, which was started about 1870 with a small "central station" in the Rue St. Anne, in the centre of Paris. This business grew gradually until it became far too large to be carried on from such a position, and a few years since a central station, with much enlarged machinery, was established in the Rue St. Fargeau, which is in Belleville, about 4½ miles east of the Madeleine. There are now about 8,000 pneumatic clocks, public and private, in Paris, driven from St. Fargeau, and regulated by a standard clock in the Rue St. Anne; but as this part of the work, although it originally formed the basis of the whole system, is now a comparatively very small part of it, and is of an entirely special nature, I do not propose to say anything further about it here. Until about two years since, a pair of single-cylinder horizontal engines by Farcot, and a beam engine by Casse, sufficed for the whole work; but by that time the demand for compressed air for working motors had so increased that extension had become imperative, and the present working plant of six compound condensing engines, each working two air-compressors, with the necessary complement of boilers, was put down. This plant, except the compressors, was supplied from England by Messrs. Davey, Paxman & Co. of

Colchester. The compressors for the English engines were made in Switzerland on the Blanchod system. The demand for power is at present so great that, at certain hours of the day, practically the whole plant, old and new, indicating considerably over 2,000 horse-power, is fully at work, and in consequence a duplicate main is being laid throughout, and new engines and compressors, half of them constructed by Davey, Paxman & Co., and half by John Cockerill & Co. of Seraing, are being pushed forward as rapidly as possible.

The general system of working is as follows: Fig. 1. The steam-cylinders (I) compress the air to a pressure of five atmospheres (six atmospheres absolute) or thereabouts in the compressor-cylinders (II). The air is drawn in direct from the engine-house, where I found it to be about 70 deg. Fahr., and after it has finally passed along the mains for some little distance it is again about the same temperature. It is therefore of the greatest importance to prevent its temperature rising during the compression, as all heat so taken up by the air represents work done in the steam-cylinders of which no part whatever can be utilized. If the air were compressed adiabatically, i.e., without any cooling whatever, its temperature on leaving the compressor would be about 430 deg. Fahr., a temperature higher than that of saturated steam of 300 lbs. pressure per square inch. At St. Fargeau water for cooling is allowed to run into the cylinders through the suction-valve during the suction stroke, in such quantity that the final temperature is only 150 deg. Fahr. So far the result is satisfactory enough, but owing, un-

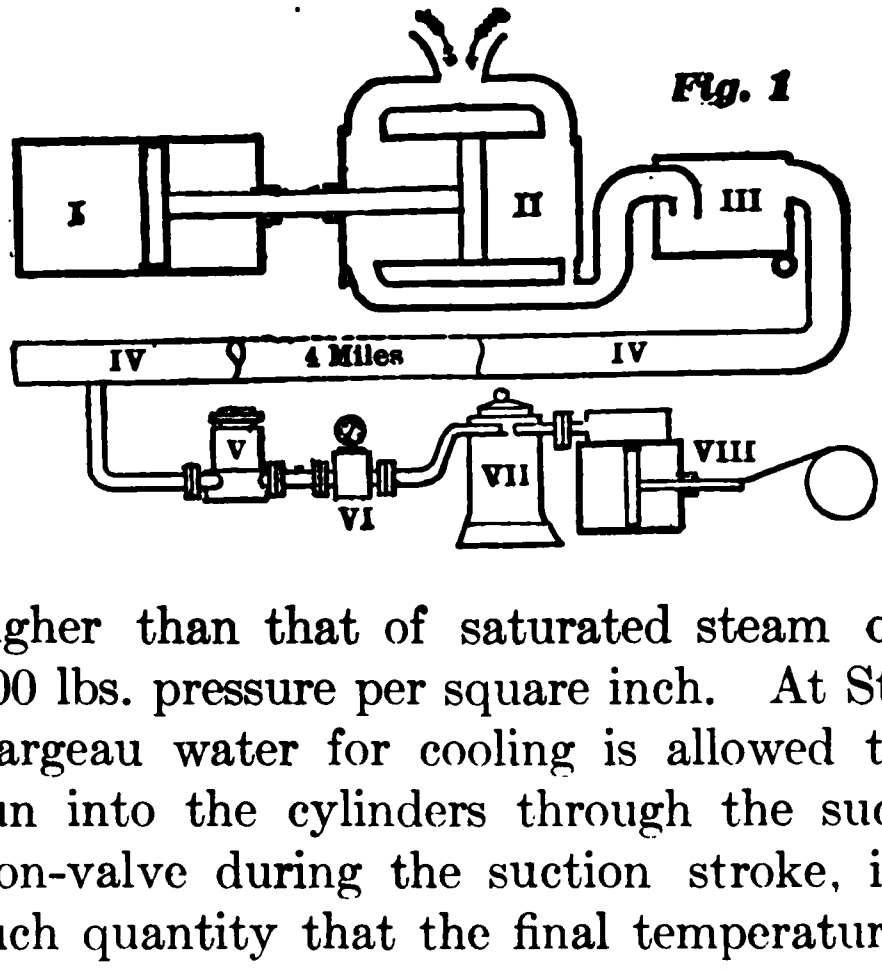
Fig. 1

fortunately, to the particular way in which the cooling water is utilized mechanically, the air does not get cooled until after it has been compresssed, so that practically no benefit is obtained from the cooling in spite of the extent to which it occurs. The power expended, as we shall see presently, is practically equal to what would have been expended had the compression been adiabatic. The quantity of air dealt with at each revolution is 47.6 cubic feet (for the pair of double-acting compressing cylinders), which is equivalent to 3.55 lbs., the quantity of water used being about 2.4 lbs.

After compression, the air, now having an absolute pressure of six atmospheres and a temperature of 150 deg. Fahr., is pushed into large boiler-plate receivers (III) of which some are arranged to act as separators, and in these a large portion of the cooling water, which has been carried along mechanically by the air, is deposited and removed, before the air enters the mains (IV). The principal main is 300 mm. (11.8 in.) in diameter and about ⅜ in. thick. It is of cast-iron, made in lengths perfectly plain at each end, and connected by a very simple external joint made air-tight by india-rubber packing-rings. This joint leaves the pipe quite free endwise, and also allows all necessary sideway freedom, so that accidental distortion to a quite measurable extent is entirely without effect on the tightness of the joint. The mains are partly laid under roadways and footways, and partly slung from the roof of the sewer subways. They are supplied at intervals with automatic float traps for carrying off the entrained water and the water of saturation, as they deposit.

On entering a building on its way to a motor, the air is first passed through a meter (V) exactly as gas would be. The quantity passing is of course too great to allow anything like an ordinary gas-meter to be used; indeed, only inferential meters seem to have been at all successful. The meter actually in use in Paris is a small double cylindrical box.

The air passes by a branch through to the bottom of the inner box, up through it, down outside it between the two boxes, and away through a branch at the bottom opposite the inlet branch The whole measuring apparatus is a little four- or six-armed fan, with aluminium or nickel vanes, placed near the bottom of the inner casing and communicating motion by a light vertical steel spindle to a clock-work register, like that of a gas-meter, placed on the top. The quantity recorded is simply the number of revolutions made by the fan, or some proportional number, and this is turned into cubic metres by multiplication by an arbitrary constant, determined by direct experiment. As to the working of this meter I shall have something to say later on; it is the only type used by the Paris company, and serves in a very large number of cases as basis of payment.

After passing the meter the air is carried through a reducing-valve (VI) by which the initial pressure in the motor is prevented from rising above a certain limit, which in practice appears to vary between 3½ and 5½ atmospheres absolute, according to the size of the motor in proportion to its work.

Between the reducing-valve (VI) and the motor (VIII) there is placed in all ordinary cases a small stove or heater (VII). This heater is simply a double cylindrical box of cast-iron, having an air-space between its outer and its inner walls. The air under pressure traverses this space, and is compelled, by suitably arranged baffle-plates, to circulate through it in such a fashion so as to come into contact with its whole surface. A coke fire is lighted in the interior of the stove, and the products of combustion are carried over the top of it, and made to pass downwards over its exterior surface, inside a sheet-iron casing, on their way to the chimney-flue. The heater for the motor on which I experimented (which indicated 10 to 12 horse-power) was about 21 in. in diameter and 2 ft. 9 in. high over all. The use of the heater, and the extent to which that use is advantageous and economical, are matters on which I shall touch later.

The motors used in Paris are mainly of two types. Up to one horse-power or thereabouts small rotary engines, of a form patented by M. Popp, are used; into the details of these it is not necessary to enter here. They start very readily, are easily governed, are provided with capital automatic lubricators worked by compressed air, run at a very high speed, and are altogether very convenient. They use the air with little or no expansion, without previous heating, and have, of course, no pretence to economy in use of air.

The larger sized motors, up to double-cylinder engines 12 in. by 14 in., which is the largest size used, are simply ordinary Davey-Paxman steam-engines, employed for air absolutely without any alteration or modification. These engines have, in most cases, automatic cut-off gear controlled by the governor, and can therefore easily work with the largest economical ratio of expansion for the not very high available initial pressure. I believe that in every case heaters are provided for these engines, although in some instances, where both power and refrigeration are required, they are used sparingly or not at all, in order to take advantage of the cooling due to expansion.

After this short description of the general arrangements of the Paris company's work I come now to the experiments which I made to ascertain its efficiency. Starting from the main engines at the central station, the particular matter which I had to determine was the indicated horse-power which would be shown by a small motor three or four miles from St. Fargeau for each indicated horse-power expended by the main engines on the air which passed through that motor. The ratio thus obtained would be the total indicated efficiency of the whole system of transmission. This ratio is in reality the duct of a number of separate efficiencies, and the separate determination of these formed a necessary check on the value of the total efficiency. These separate efficiencies may be summarised as follows:

1. Mechanical efficiency of main engines, or ratio of work done in compressors to indicated work in steam-cylinders.
2. Efficiency of compressors, or ratio of maximum work which could be done in a motor by each cubic foot of compressed air at 70 deg. Fahr., to the work actually done in compressing that air.
3. Efficiency of mains, or ratio in which the capacity of the compressed air for doing work is reduced by friction and leakage.
4. Efficiency of reducing-valves, or ratio in which the capacity of the compressed air for doing work is reduced by the lowering of its initial pressure at the motor.
5. Indicated efficiency of motor, or ratio in which the actual indicated work done falls short of the maximum work

which the quantity of air measured through the meter could do after passing the reducing-valve.

The product of these five efficiencies is the total efficiency of transmission without the use of a heater. When a heater is used the matter is somewhat more complicated. All the ratios given above represent what may be called mechanical efficiencies, all of them have *unity* for their maximum attainable value. It is, therefore, not possible to introduce in direct combination with them a thermodynamic efficiency (ratio of additional heat supplied to additional work done), which has for its maximum value not unity, but 0.3 or some similar small value. This could only be done if the measurement of efficiency had started originally from the heat given to the steam instead of from the indicated horse-power, and this would have given numbers having a minimum of practical value or convenience. Probably the best practical measure of the efficiency of the whole transmission, when using heated air, is obtained by finding the equivalent in indicated horse-power at the central station of the coke used in the heater, and adding this to the indicated horse-power actually used. It would not be possible, by the expenditure of this or any other amount of indicated horse-power at the central station, to obtain the same results as by heating the air just before entering the motor, but that, of course, does not affect the question before us.

The determination of the indicated horse-power of the main engines presented no difficulty. I measured it on one pair of engines at different speeds from 21 to 44 revolutions per minute. At 31.5 revolutions per minute it amounted to 254.9, and at all speeds it was approximately 8.1 indicated horse-power per minute per revolution. The mechanical efficiency was sensibly the same at all speeds, viz., 84.5 per cent, as given in the table. There was no method available for ascertaining to what extent the real quantity of air

Fig. 2

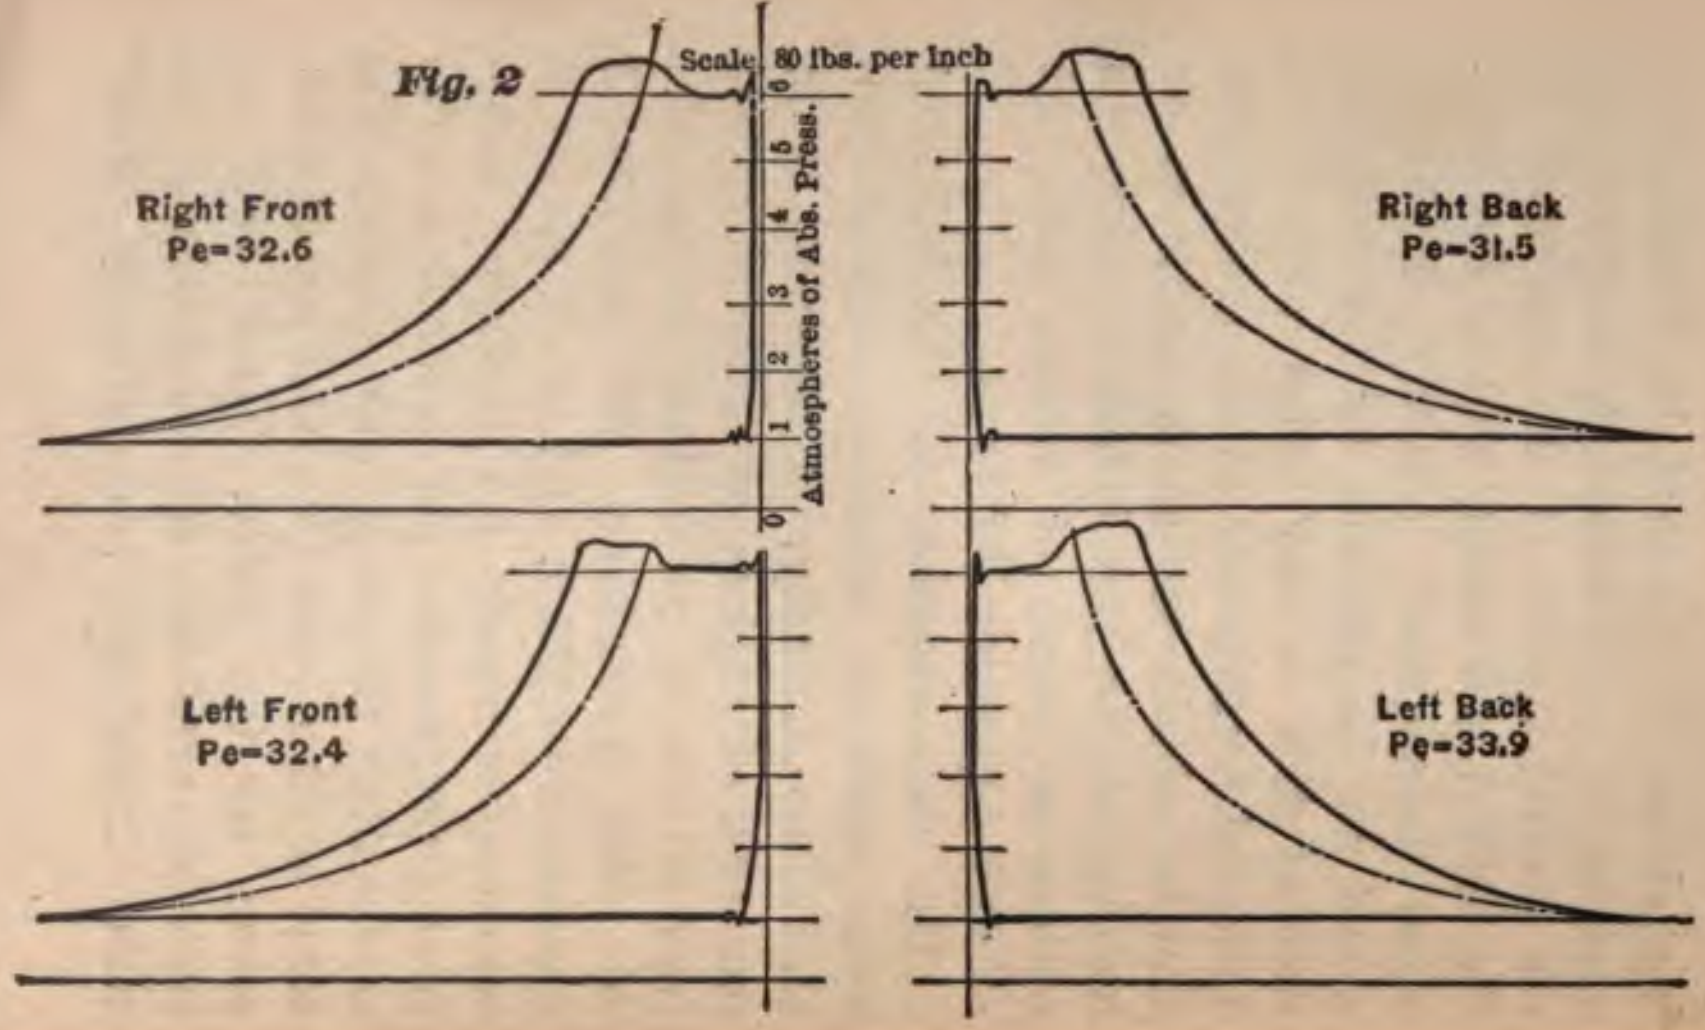
Scale 80 lbs. per inch
Atmospheres of Abs. Press.
0
1
2
3
4
5
6
Right Front
Pe=32.6
Right Back
Pe=31.5
Left Front
Pe=32.4
Left Back
Pe=33.9

delivered corresponded to the nominal volume swept through by the compressor-pistons. The indicator-diagrams, Fig. 2, show no signs of leakage past the valve, but there are no doubt various possible leakages which would not show on the diagrams. In the absence of any direct means of determination, however, I have assumed that the compressor-cylinders delivered their full volume, which corresponds to 348 cubic feet * of air per indicated horse-power per hour. This air has a weight of about 25 lbs. It may be pointed out that the water injected practically fills up the clearance-space at the end of each stroke.

I have already pointed out that at whatever temperature the air is delivered, it must fall to about its original temperature in the long length of mains before it reaches the motors. It is, therefore, a simple matter to find the

---

* Here and elsewhere, unless specially mentioned, volumes are supposed to be at atmospheric pressure and at 70 deg. Fahr., the actual admission temperature during my experiments.

maximum amount of work which can be done by the air delivered per indicated horse-power, for it simply amounts to the PV of the air at six atmospheres absolute and at 70 deg Fahr., plus the work it can do in expanding adiabatically to a pressure of one atmosphere, and minus the work necessary to expel it from the cylinder at that pressure and at the corresponding temperature.* In the present case I find that this work is equivalent to 0.52 indicated horse-power for an hour, so that the efficiency of the compressors is 61 per cent It will be seen from the diagrams that the compression curve falls only a little below the adiabatic, and as the area of the diagram is increased somewhat by the resistance of the discharge-valve, the work done is practically the same as if the compression had been adiabatic, and

---

* In symbols, if suffixes 1 and 2 be used for the initial and final conditions of the air, if pressures be measured in pounds per square foot and volumes in cubic feet, the maximum work possible, without addition of heat, is

$$(P_1V_1 - P_2V_2)\frac{\gamma}{\gamma - 1} = 3.45(P_1V_1 - P_2V_2).$$

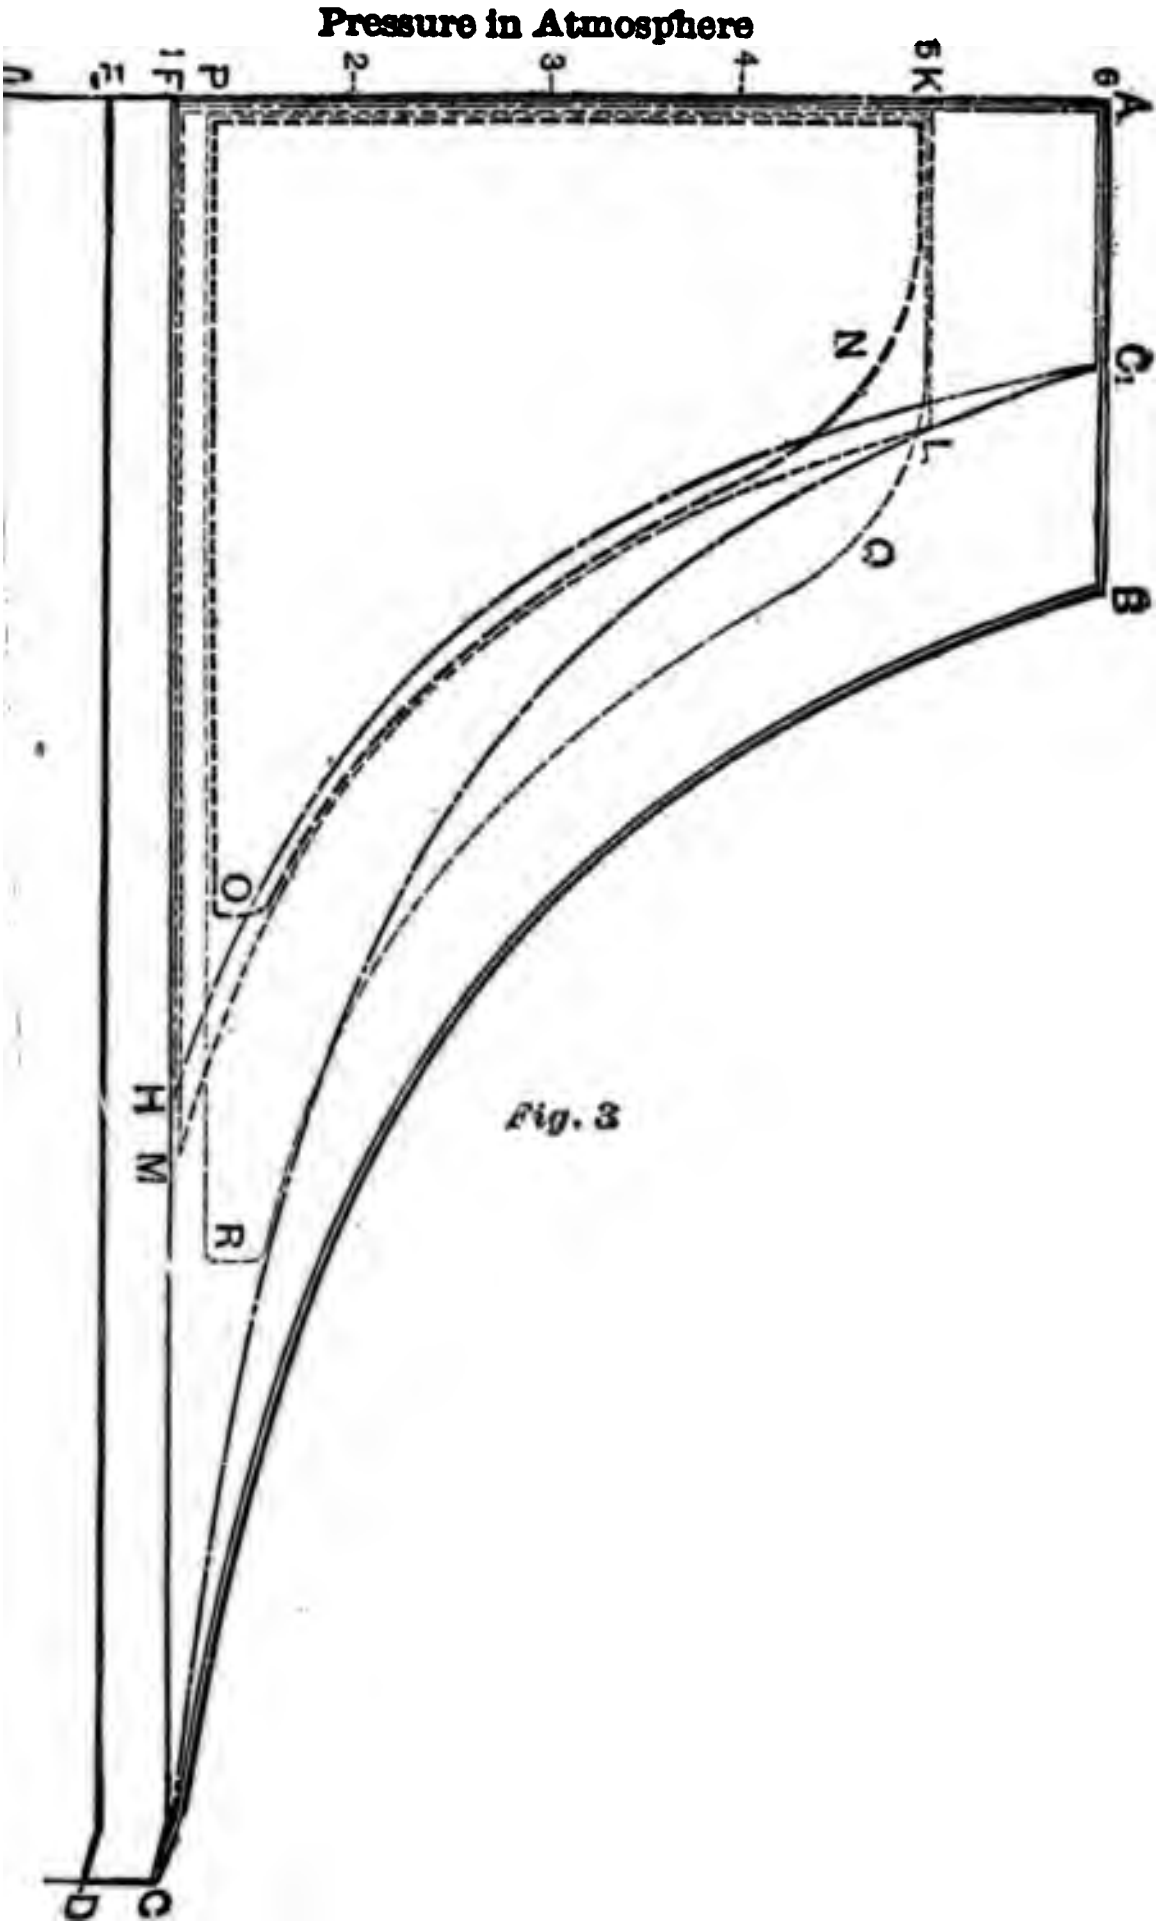

Fig. 3

there had been no cooling at all. This matter I have already referred to.

Fig. 3 shows graphically the relation between the quantities so far measured. If the area ABCDE represents on any scale the work done in the steam-cylinder, the area ABCF represents on the same scale the work done on the air in the compressors. CB is an adiabatic curve, CG an hyperbola, so that AG represents the volume of the compressed air when it has fallen in the mains to the temperature which it had initially at C. GH being again an adiabatic curve, the area AGHF (which is 61 per cent of ABCF, and 52 per cent of ABCDE) represents the maximum work which can be obtained from the air in a motor, the quantity calculated in the last paragraph.

If it be assumed that the temperature in the mains is constant, then any loss of pressure, due to friction, must be accompanied by an exactly equivalent increase of volume. Thus if (Fig. 3) the pressure falls from A to K, the volume increases from AG to KL, the point L lying on an isothermal through G. The loss of possible work due to such a reduction of pressure is represented by the difference between the areas AGHF and KLMF, in both of which the expansion curves are adiabatic. The change of temperature in passing through a reducing-valve is so small that it may be assumed without sensible error that the loss due to such a process may be calculated in the same fashion.

I determined the loss of head in the mains by a series of observations made simultaneously at known points in Paris and at St. Fargeau. The pressure-gauges used having been carefully compared, and all the necessary corrections made, I found the loss of pressure to vary from 0.35 to 0.25 atmosphere, according to the distance from St. Fargeau and the amount of air passing through the pipes. The average loss may be taken as 0.3 of an atmosphere at three miles from St. Fargeau, when the indicated horse-power there was about 1,250 and the maximum velocity of the air in the mains about

1,550 feet per minute. What proportion of this loss of head may have been due to leakage, and what the amount of leakage (if any) may have been, I had no means of determining. The duplicate main to which I have referred is not yet completed, and it was impossible to isolate any portion of the mains, even temporarily, to test for leakage. From the figures I have given, as well as from the nature of the pipe-joint, I cannot doubt that the leakage must, under any circumstances, have been extremely small.

In the table I have given approximate values of the loss due to fall of pressure in the mains and through the reducing valve, with various values of the total reduction of pressure. With a total reduction of half an atmosphere the combined efficiency of mains and valves is 0.96, reducing the maximum possible work at the motor to 0.5 indicated horse-power per indicated horse-power at the central station. Under these conditions the minimum possible consumption of air per indicated horse-power at the motor would be twice 348, or 696 cubic feet per hour.

The motor on which I made most of my experiments was an ordinary horizontal Davey-Paxman engine, with a single cylinder 8¼ inches in diameter and 12 inches stroke, fitted with automatic cut-off gear. For convenience sake I tested it at St. Fargeau and not in Paris, but I used a pressure only of 4½ atmospheres, which pressure I found to be exceeded on branch mains 3½ miles from St. Fargeau, where I made later experiments. The position of the motor did not, therefore, put it under any conditions different from those existing in the centre of Paris. I made a large number of experiments on this motor, under various conditions, individual experiments lasting from four hours down to half an hour. I shall here give figures representing only the four most important of my experiments, two with cold and two with heated air, averaging the two experiments in each case, so as not to burden my paper with unnecessary figures.

The motor, when indicating 9.9 horse-power, and making about 125 revolutions per minute, used 890 cubic feet of air per indicated horse-power per hour. (Its indicator-diagrams are shown in Fig. 4, their area being represented by KNO in Fig. 3.) The work which this quantity of air, at the given pressure and temperature, is theoretically capable of doing behind a piston, expanding down to atmospheric pressure, is equivalent to 1.27 horse-power for an hour. The indicated efficiency of the motor (the ratio expressing loss by rounding of curves, by insufficient expansion, by back pressure,

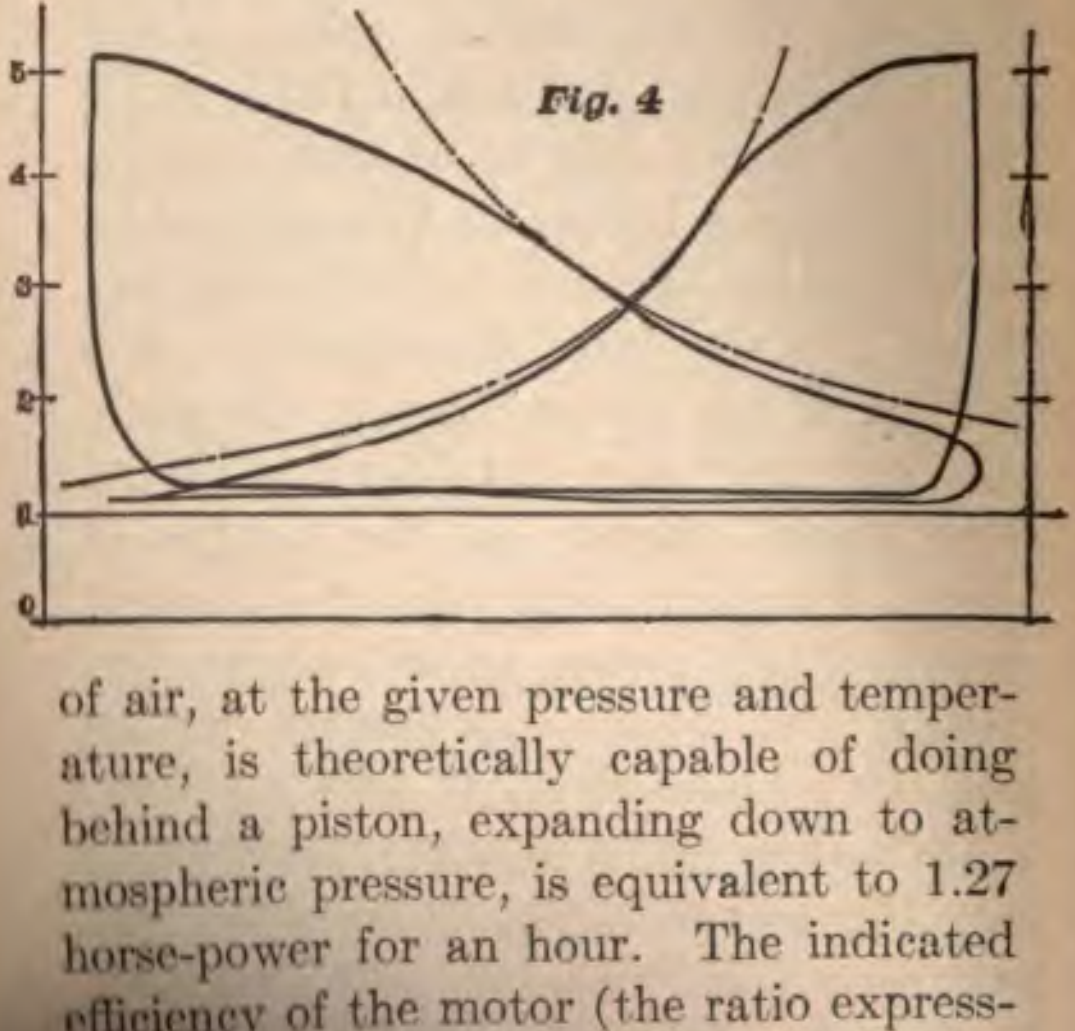

etc.) is therefore 0.79. This figure gives us a check on the ratios already worked out, for if they are right the air actually used should be $\frac{1}{0.79}$ times as great as the 696 cubic feet already allowed for. This would be 880 cubic feet, which represents of course a most satisfactory check. It will, however, be recognized that this agreement checks the figures only so far as they apply to air actually used, and would not be vitiated or in any way affected by losses by leakage.

The vital measurement of all the experiments was, of course, that of the quantity of air used. The air was passed through one of the fan-meters already described, readings of which were taken every quarter of an hour. After the experiments were over air was passed through the same meter at exactly the same pressure, and in as nearly as possible the same quantity, and then passed, at atmospheric pressure, through two large standard wet gas-meters. The readings of these were taken as correct, and the multiplier for the fan-meter determined from them. I found from numerous experiments on several fan-meters that this multiplier varied both with pressure and with quantity, but that the latter variation was very small within the limits of my experiments. I have no doubt that the air quantities which I shall give you are correct within about 2 per cent, plus or minus.

It will be seen that the total indicated efficiency of transmission, with cold air, is 0.39; in other words, that work requires to be done at the rate of 2.6 indicated horse-power at the central station per indicated horse-power at the motor. The motor was worked on a brake, and its mechanical efficiency was found to be 0.67, so that in round numbers 4 indicated horse-power were required at St. Fargeau per brake horse-power at the motor.

To examine the economy due to heating the air before using it, I used the same motor, working as nearly as possible at the sa[illegible]wer and speed, and with exactly the same pressure, but passing the air between the meter and the engine through such a heating-stove as I have already described. I weighed all the coke used, and read the temperatures every five minutes during a four-hours' trial. The air was heated in passing through the stove, up to 315 deg. Fahr., with a consumption of about 0.39 lb. coke per indicated horse-power per hour. As the admission temperature on the cold trials was 83 deg. Fahr.* only, this corresponds to an increase of about 42 per cent in the volume of the air, and should therefore (had the indicated efficiency remained the same) have been accompanied by a decrease of air consumption in the ratio $\frac{1}{1.42}$ or 0.70. The air actually used was 665 cubic feet per indicated horse-power per hour, which is 0.75 of the 890 cubic feet formerly required, so that the full economy is very nearly realized. The indicator-diagrams are shown in Fig. 5, and are represented by KPQO in Fig. 3. An air consumption of 665 cubic feet per indicated horse-power per hour corresponds to an indicated efficiency over the whole system of 0.52, in

---

* This somewhat high admission temperature was the only point in which the motor at St. Fargeau differed from those in Paris, where I found the admission temperature to be from 69 deg. to 71 deg. Fahr.

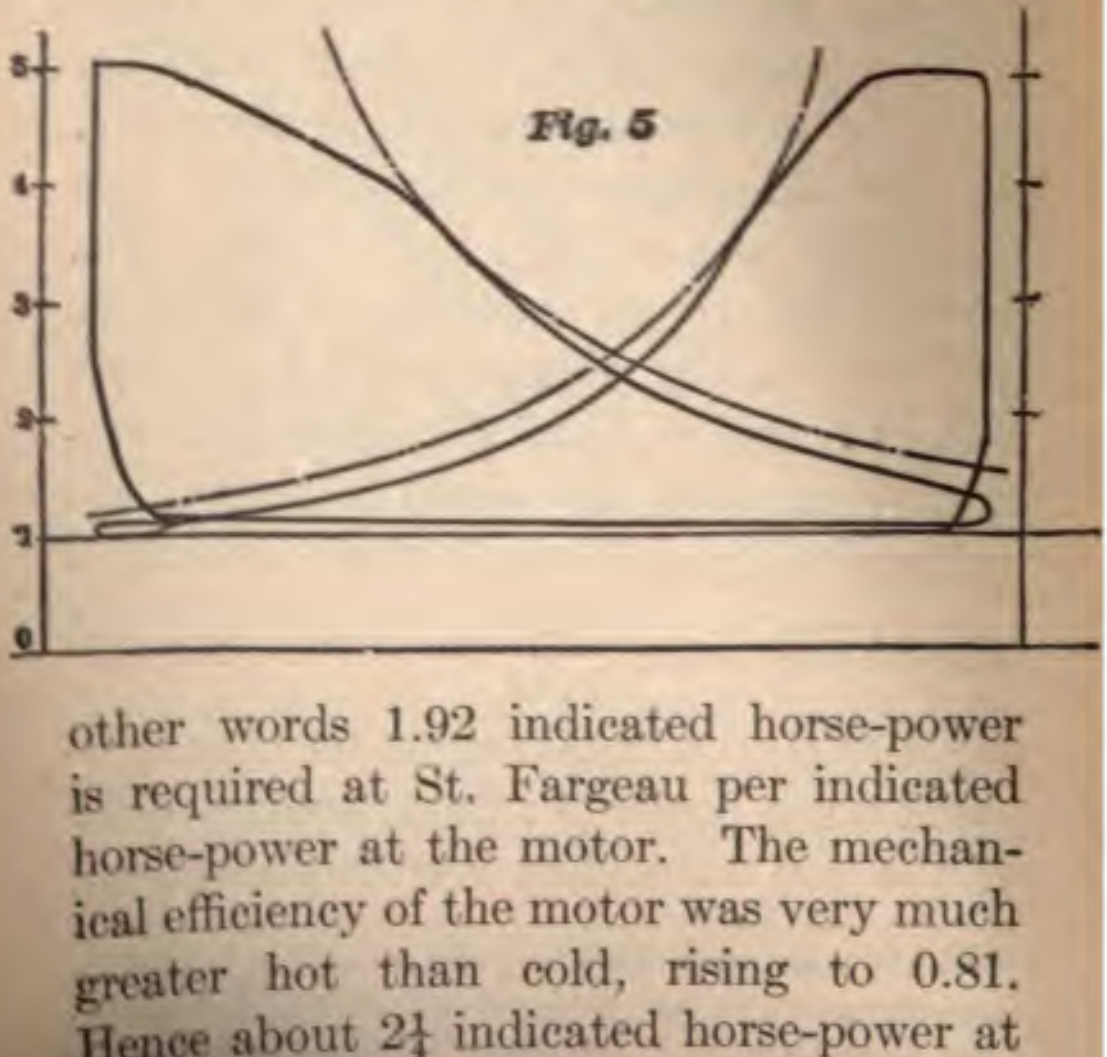
Fig. 5

other words 1.92 indicated horse-power is required at St. Fargeau per indicated horse-power at the motor. The mechanical efficiency of the motor was very much greater hot than cold, rising to 0.81. Hence about 2¼ indicated horse-power at St. Fargeau gave one brake horse-power at the motor. These figures, however, take no account of the coke burnt in the heater, and are, therefore, only to be considered as *apparent* efficiencies. Allowing for the value of the coke in the manner already described, the real indicated efficiency of the whole transmission is 0.47.

A shorter experiment with slightly higher temperatures and considerably larger indicated horse-power, gave still more economical results, the air consumption falling to 623 cubic feet per indicated horse-power per hour, an "apparent" indicated efficiency of 0.56. This experiment was not, however, of sufficient duration to allow of coke measurement.

As to the value of the preliminary heating, the figures which I have given show that it caused a saving of 225 cubic feet of air per indicated horse-power per hour, at a cost to the consumer of about 0.4 lb. of coke per indicated horse-power per hour. I do not doubt that the stoking of the heater during my experiment was much more careful than it would be in ordinary practice, although, on the other hand, it would not be difficult to design a more economical stove. If, however, the coke consumption were even doubled, it would only amount to 72 lbs. per day of nine hours for 10 indicated horse-power, the value of which might be 6d. or 7d. The air saved under the same circumstances would be over 20,000 cubic feet, the cost of which, at the high rate charged in Paris, would be 7s. 3d. There is no doubt therefore that to attain the maximum of economy the preliminary heating of the air should be carried as far as is practicable.

Of course heating the air serves the purpose also of preventing any chance of the exhaust-pipe becoming ice-clogged. I found this to happen once or twice when working with cold air, its occurrence depending rather on the amount of moisture in the air than on the exhaust temperature, for the engine, after running freely with an exhaust of —35 deg. Fahr., choked later on at +2 deg. Fahr. I do not think that in any case which I met with there would have been any trouble from choking had the exhaust-pipes been properly arranged. As it was, they were merely the ordinary vertical exhaust-pipes of a steam-engine, quite suitable for their original and for their intended purpose, but singularly unfitted for the purpose to which I was putting them.

Summarizing now the whole matter as regards efficiency, it may be said that the result of my detailed investigations is to show that the compressed-air transmission system in Paris is now being carried on on a large commercial scale in such a fashion that a small motor four miles away from the central station can indicate in round numbers 10 horse-power for 20 indicated horse-power at the station itself, allowing for the value of the coke used in heating the air, or for 25 indicated horse-power if the air be not heated at all. Larger motors than the one I tested (and there are a number of such in Paris) may work somewhat more, and smaller motors somewhat less, economically. The small rotary motors would, of course, be much less economical. The figures which I have given are, however, such as can be reached by any motor of between 5 and 25 indicated horse-power if worked at a fair power for its size. M. Victor Popp himself, and the engineers of the company, by no means content with the results already obtained, are experimenting in various directions with a view to greater economy, and I have not the least doubt that they will attain their end. But although I made several experiments on new apparatus, I prefer to leave their results here undiscussed, confining myself as strictly as possible to the work which has been already carried out and the economy of actual present working, rather than giving any credit for the result of improvements which, however certain they may be thought, are not yet actually carried out in practical work.

A system of transmission which has actually been carried out on a large commercial scale in such a way as to have an indicated efficiency of 50 per cent between prime mover and secondary motor, four or five miles apart, is one which needs no adventitious aids to commend it to notice, especially where its uses are so numerous and so varied, and its convenience so extremely great, as are those of compressed air. Both M. Victor Popp, who has organized and carried through the work of the Paris company, and Mr. James Paxman, who has designed and made the greater part of the machinery used, are to be heartily congratulated on the results which have attended their work.

While, however, I am unwilling to lay stress on possibilities which are not yet actualities, there can be no harm in saying that I have no doubt whatever that with mere improvement of existing methods and appliances, and without the adoption of any new or untried methods whatever, the new plant of the Paris company now being constructed can be made to have an indicated efficiency of 67 per cent instead of 50 per cent, and to give about 0.54 effective horse-power at the motor for each indicated horse-power at the central station, in the case of such a motor as that on which I experimented. Under these circumstances the air used per indicated horse-power at the motor would be 520 cubic feet, or 650 cubic feet per brake horse-power. I have the less hesitation in giving these hypothetical figures because the more important imperfections of M. Popp's transmission system arise from such a very obvious cause. Nothing, indeed, can be easier than to point out various weak points in the arrangements adopted, and yet, in spite of all such somewhat cheap criticism, the fact remains that no one has yet carried out a compressed-air transmission with anything approaching to the same success on anything like the same scale. The fact is that the success of the system has been essentially due rather to the practical good sense with which the work has been carried through than to any special novelty in the methods employed. The air-compressing arrangements at St. Fargeau are in no respect novel or specially perfect; they had been used over and over again before; there is no special advantage in M. Popp's rotary motor that may not probably be possessed by many other rotary motors; the larger motors are simply good ordinary steam-engines, such as can be bought any day in open market, used without the slightest alteration. Of the fan-meter it can only be said that it works well enough to allow progress to be made while it is being improved, and even of the coke stove one would not like to say very much more. The plan of heating compressed air before using it in a motor was first proposed many years ago. The great success which has attended the work in Paris has been attained because its directors have wisely chosen rather to set to work with imperfect apparatus, if only it were simple, fairly effective, and ready to hand, than to wait for the possible invention of novelties and improvements, or to risk the success of their start by the use of any unknown or untried apparatus, however promising its nature. They have had, moreover, the great advantage hitherto of being always asked for more air than they could supply, so that their works have grown and increased simply to meet a growing and increasing demand, and (fortunately perhaps) the urgency of the demand has left them no alternative but to meet it by the very simplest possible means.

I have already mentioned the great convenience and handiness which a compressed-air motor possesses. From the engineer's point of view these qualities are most striking. The engine starts, for instance, without the least hesitation even with full brake load on, directly the valve is opened, if the crank is just past the centre. This, of course, is impossible with a gas-engine, and hardly less impossible with any ordinary (single-cylinder) steam-engine. The absence of the heat and leakage, and of the noise and smell, which so often in greater or less degree accompany the smaller steam or gas motors, constitute a very much larger difference than could at first be thought possible. But from the consumer's point of view the advantages are even greater than from the engineer's. There is, first of all, the complete absence of danger and of nuisance of every kind. There is then the great saving of space, even as compared with a gas-engine, and much more as compared with a steam-engine and boiler. There is reduction of insurance on account of the entire absence of fire risk. Not only this, but the air motor seems to me completely to supply that most important industrial want, a motor suitable for "small industries," that is, for work carried on in workmen's own houses, or in very small workshops. For here it is not only mechanically most suitable, but in the nature of things it can be made to cool or ventilate, by its exhaust, to any desired extent. The sanitary advantage of this, in cases where work is carried on in confined spaces, can hardly be exaggerated. Even in a very large printing-office in Paris I found an almost unbearable atmosphere made quite pleasant as long as the motor was working, by allowing a portion of the exhaust to come into the room.

By using air direct from the mains in the motor, or by heating it only very slightly, the exhaust air can be, of course, so greatly reduced in temperature as to be available for freezing purposes. In one Paris restaurant, for instance, which I visited, I found that the exhaust was carried through a brick flue into the beer cellar. In this flue the carafes were set to freeze, and large moulds of block ice were also being made for table use, while the air was still cold enough in passing away through the beer cellar to render the use of ice for cooling quite unnecessary, even in the hottest weather. The nominal function of the engine in this case was the charging of batteries used in the electric lighting of the restaurant. The conjoint use of power and cold is common in Paris, the power being in this case generally applied in electric-lighting. While in any large city such as Paris, it is no doubt a great point that by a compressed-air system the handiest possible cooling appliances can be brought everywhere within reach, in tropical climates this is something rather of necessity than of luxury. In such cases we might have the apparent paradox of a motor worked essentially for its exhaust: the work done would be a bye-product; the cold air would be the principal thing. In such a case, if there were no useful work to be done, the motor could even be made (as has been suggested to me) to pump air back into the main, and thus virtually to about halve its air consumption. This possibility of "laying on" cold air in hot climates is, of course, a most important matter in connection with the future of compressed air.

TABLE.

Summary of Efficiencies of Compressed-air Transmission at Paris, 1889, between the Central Station at St. Fargeau and a 10 Horse-power Motor working with Pressure reduced to 4½ Atmospheres.

(The figures below correspond to mean results of two experiments cold and two heated.)

1 indicated horse-power at Central Station gives 0.845 indicated horse-power in compressors, and corresponds to the compression of 348 cubic feet of air per hour from atmospheric pressure to 6 atmospheres absolute. (The weight of this air is about 25 lbs.)	Efficiency of main engines 0.845.
0.845 indicated horse-power in compressors delivers as much air as will do 0.52 indicated horse-power in adiabatic expansion after it has fallen in temperature to the normal temperature of the mains.	Efficiency of compressors $\frac{0.52}{0.845}=$ 0.61.
The fall of pressure in mains between Central Station and Paris (say 3 miles) reduces the possibility of work from 0.52 to 0.51 indicated horse-power.	Efficiency of transmission through mains $\frac{0.51}{0.52}=$ 0.98.
The further fall of pressure through the reducing valve to 4½ atmospheres (5½ atmospheres absolute) reduces the possibility of [illegible] 0.51 to 0.50.	Efficiency of reducing valve $\frac{0.50}{0.51}=0.98$.

The combined efficiency of the mains and reducing valve, between 5 and 4½ atmospheres, is thus $0.98 \times 0.98 = 0.96$. If the reduction had been to 4, 3½, or 3 atmospheres the corresponding efficiencies would have been 0.93, 0.89, and 0.85 respectively.

Incomplete expansion, wire-drawing, and other such causes reduce the actual indicated horse-power of the motor from 0.50 to 0.39.

Indicated efficiency of motor $\frac{0.39}{0.50} = 0.78$.

Indicated efficiency of whole process with cold air 0.39.

By heating the air before it enters the motor to about 320 deg. Fahr., the actual indicated horse-power at the motor is, however, increased to 0.54. The ratio of gain by heating the air is, therefore, $\frac{0.54}{0.39} = 1.38$.

Apparent indicated efficiency of whole process with heated air, 0.54.

In this process additional heat is supplied by the combustion of about 0.39 lb. coke per indicated horse-power per hour, and if this be taken into account the real indicated efficiency of the whole process becomes 0.47 instead of 0.54.

Real indicated efficiency of whole process with heated air, 0.47.

Working with cold air the work spent in driving the motor itself reduces the available horse-power from 0.39 to 0.26.

Mechanical efficiency of motor, cold, 0.67.

Working with heated air the work spent in driving the motor itself reduces the available horse-power from 0.54 to 0.44.

Mechanical efficiency of motor, hot, 0.81.

Most of the compressed air in Paris is used for driving motors, but the work done by these is of the most varied kind. A list which I have gives the locality, use, and power of 225 installations, nearly all motors working at from ⅛ horse-power to 50 horse-power, all driven from St. Fargeau, and the great majority of them more than two miles away from it. In a number of cases the motor drives dynamo machines for electric lighting. In the offices of the *Figaro* and *Petit Journal* large motors are also used for printing, and there are many small printing establishments also worked by compressed air. Among the smaller industrial purposes for which the air motors are used in Paris, I find the driving of lathes for metal and wood, of circular saws, shearing-machines, drills, polishing-machines, and many others. They are used also in the workshops of carpenters, joiners and cabinet-makers, of smiths, of umbrella-makers, of collar-makers, of bookbinders, and naturally in a great many places where sewing-machines are used, both by dressmakers, tailors, and shoemakers, and from the smallest to the largest scale. They find application also in all sorts of industrial work, with confectioners, coffee-roasters, color-grinders, billiard-ball makers, in many departments of textile industry, and other matters too numerous to mention.

I may mention one particular instance of variety of application which interested me much. At the "Montagnes Russes" I found a large horizontal engine placed in a recess driving a dynamo and cells for the electric lighting of the whole building; a small vertical engine in another place worked the rotary pump, which actuated the "cascade;" two or three large air-driven fans in wooden shafts served for ventilation; and lastly, a simple connection on a flexible pipe threw the air-pressure into the beer-barrels as they were brought in, and transferred their contents to a height from which they could afterwards descend by gravity to the place where they were required.

As to the rate at which the compressed air is sold, I believe that in most of the larger installations the work is done by contract (at so much per lamp-hour in the case of the electric lighting), but in the smaller ones the air is charged for by meter. The rate of charge is 1.5 centimes per cubic metre (=8½ c. per 1,000 cubic feet) for air used in motors and 2 centimes per cubic metre (=$11\frac{3}{10}$c. per 1,000 cubic feet) for air used directly. Air used for raising fluids is charged according to quantity raised. The former rate is equivalent ito 4.25d. (=8.5c.) per 1,000 cubic feet (the volume in all cases being measured at atmospheric pressure). In addition to this, a fixed charge of from 100 to 250 francs (=$20.00 to $50.00) is made for pipes and connections, and a small rent for the motor, if it be not bought outright.

THE TRANSMISSION AND DISTRIBUTION OF POWER FROM CENTRAL STATIONS BY COMPRESSED AIR.

By Prof. WILLIAM CAWTHORNE UNWIN, B.Sc., F.R.S., M. INST. C. E.

IN 1888 the author communicated to the Institution a short paper on "The Transmission of Power to great distances by Compressed Air." * In that paper the loss of pressure in air-mains and the efficiency of transmission were discussed, it is believed, with more theoretical completeness than had before been attempted. It was not within the scope of that paper to deal with the efficiencies of compressors and air-motors, and indeed at that time very little trustworthy

---

* Minutes of Proceedings Inst. C. E., vol. xciii., p. 421.

experimental information was available as to the waste of work in air-machinery. However, for the purpose of examining the practical bearing of the general equations obtained, it was necessary to assume efficiencies for the compressors and air-motors, and some special cases of transmission of power were examined in detail. It may now be said that the assumptions made were not very inexact, for such systems of compressed air distribution as were in operation at that time. In 1889 Professor A. B. W. Kennedy made careful experiments on the system at work in Paris. He has given a summary at the end of his paper of all the losses of work which he found to occur in one case which was completely investigated. Air compressed at the central station, St. Fargeau, to six atmospheres (=88.2 lbs. per square inch), was transmitted 5 kilometres (=3.1 miles), reduced in pressure to four and a half atmospheres (=66.15 lbs. per square inch), and used cold in an air-motor of about 10 H.P. It was found that for 1 indicated H.P. expended in the steam-cylinder of the compressor, only 0.26 effective or brake H.P. was obtained at the air-motor. That is, the combined efficiency of compressor, main, and motor was 26 per cent. Now, in the author's paper it had been calculated that with initial compression to 58.8 lbs. per square inch absolute, and transmission a distance of a mile, the combined efficiency of compressor, main, and motor might range from 0.33 to 0.39 according to the size of main adopted. These results are rather better than that found by Professor Kennedy in the case which he examined. There is little doubt, however, that the air-motor experimented on by Professor Kennedy wasted power by leakage.

During the last year or two the systems of compressed-air distribution in Paris and Birmingham have been greatly extended, and similar plans for power-distribution in Dresden, Berlin, Vienna, Leeds and other towns have been proposed. Amongst the schemes submitted to the International Commission for the utilization of Niagara, there were three in which the power was to be distributed by compressed air. Hence the industrial importance of this system may now be considered as fully recognized.

Compressed air has often been used in transmitting power in mines and for tunnelling operations, where rough machinery is generally adopted, and where economy of power is not very important. It is not surprising that in many such cases extremely imperfect compressors and air-motors have been used, which, although they did the work required, wasted power extravagantly. It is from such experiences that an opinion has arisen that the efficiency of compressed-air transmission is very low. Better results have been obtained in the large systems for distributing power by compressed air in Paris and Birmingham. But it has been somewhat unfortunate that the types of compressor at first adopted were not such as to yield a high efficiency, and that many of the air-motors also were extremely bad. All the older compressors at Paris, and the large ones at Birmingham, are single-stage compressors, with very inadequate means of cooling the air during compression by water-jackets. At Birmingham the air is delivered into the mains at nearly 280° Fahrenheit, and practically the whole work expended in heating the air is wasted.

Now it has been known for a dozen years at least that spray injection into the cylinder is more effective in cooling the air than a water-jacket. There is also a much more powerful means of reducing the temperature of the air during compression. By compressing the air in two or more stages, and cooling it between the stages, the work expended in heating can be very greatly reduced. As early as 1881 the Norwalk Ironworks Company, Connecticut, U. S. A., constructed compound compressors, with an intercooler, with great advantage. Quite recently compound compressors have been made for the Paris system from the designs of Professor A. Riedler, of Berlin, with the result that two thirds to three fourths of the work expended in uselessly heating the air in the older machines in Paris is saved. At the same time investigations have been carried out on the air-motors in use in Paris, which show that in the construction of these also a considerable increase of efficiency can be secured.

In reconsidering the problem of distributing power by compressed air, especially in connection with the Niagara scheme, the author found nothing in the general method given in his previous paper which required revision. But the numerical results need correction in view of the improvements recently effected. Hardly any accurate experimental data were available two years ago. Now the very valuable treatise of Professor Riedler,* containing the results of observations carried out in Paris, furnishes a mass of trustworthy experimental results, both on the resistance of mains and the waste of work in compressors and air-motors. It appears worth while to re-examine the conditions of distribution of power by compressed air in the light of these new experiments.

---

* Neue Erfahrungen über die Kraftversorgung von ris durch Druckl [illegible] erlin, 1891.

LOSS OF PRESSURE IN THE AIR-MAINS.

Hitherto information as to the resistance of air-mains has been scanty. The best experiments were those made by Mr. Stockalper on the pipes of the boring machines at the St. Gothard Tunnel. The new experiments carried out by Professor Riedler and Professor Gutermuth on the air-mains in Paris are therefore of great value. The Paris mains are larger than any hitherto tried, and by coupling up different mains at night, a length of 10¼ miles could be experimented on.

The main for the older Paris compressing-station consists of cast-iron pipes 11¾ inches or 0.98 foot in diameter. It was laid partly in the sewers, which involved the use of many bends. Part of the main in the Rue de Belleville is known to be leaky, and there are numerous draining-boxes, siphons, and stop-valves which cause resistance. In a more perfectly arranged main, no doubt, the loss of pressure would probably be somewhat less than in this old one in Paris. In the following investigation Professor Riedler's results are used, but the reductions from them and the conclusions deduced are the author's. The formula for the flow of air adopted is that given in the author's paper on "The Motion of Light Carriers in Pneumatic Tubes.* "

Formula for the Flow of Air in Long Pipes.—Let D be the diameter and L the length of a pipe in feet; v the velocity of the fluid in feet per second; ζ the coefficient of friction, and H the head lost measured in feet of fluid under the given conditions. Then if the fluid is incompressible,

---

* [illegible]dings Inst. C. E., vol. xliii., 1876.
[illegible] mechanics, Encyclopædia Britannica, Hydraulics, § 84.

$$\zeta\frac{v^2}{2g}=\frac{D}{4}\cdot\frac{H}{L};$$

$$H=\zeta\frac{v^2}{2g}\cdot\frac{4L}{D}.$$

This formula may be used for the flow of air in pipes, and indeed has been so used by Mr. Stockalper and others when the variations of pressure and density are small, so that mean values can be taken and the variations neglected. Professor Riedler uses this equation also, but with the artifice of dividing a long main into portions calculated separately —a method very cumbrous and not very accurate.

When air flows along a pipe there is necessarily a fall of pressure due to the resistance of the pipe, and consequently the volume and velocity of the air increases going along the pipe in the direction of motion. The effect of the resistance is to create eddying motions, which, as they subside, give back to the air the heat equivalent of the work expended in producing them. The result is that, apart from conduction to external bodies, the flow is isothermal. Generally, in compressed-air systems, the air is delivered into the mains at a temperature above that of the surrounding earth. The excess of heat is parted with by conduction, and the temperature falls to that of the ground, but no lower, for there can then be no further loss of heat by conduction.

Let P = the absolute pressure of the air in lbs. per square foot;
T = the absolute temperature;
G = the weight of the air per cubic foot in lbs.
V = the volume of the air per lb. in cubic feet.

Then

$$PV=\frac{P}{G}=cT, \quad . \quad . \quad . \quad (1)$$

where $c=53.15$ for air. Taking the temperature of 60° Fahrenheit, so that $T=461$ [illegible],

[illegible] .5T=27,690. . . . (2)

If air is flowing steadily in a pipe, the same weight of air flows across every transverse section per second. Hence, if W is the weight of air flowing per second, Ω the area of a cross-section, at which the velocity is u,

$$\mathrm{W}=\mathrm{G}\Omega u=\text{constant}; \quad . \quad . \quad (3)$$

combining (1) and (3),

$$\Omega u\mathrm{P}=c\mathrm{TW}. \quad . \quad . \quad . \quad (3a)$$

Fig. 1.

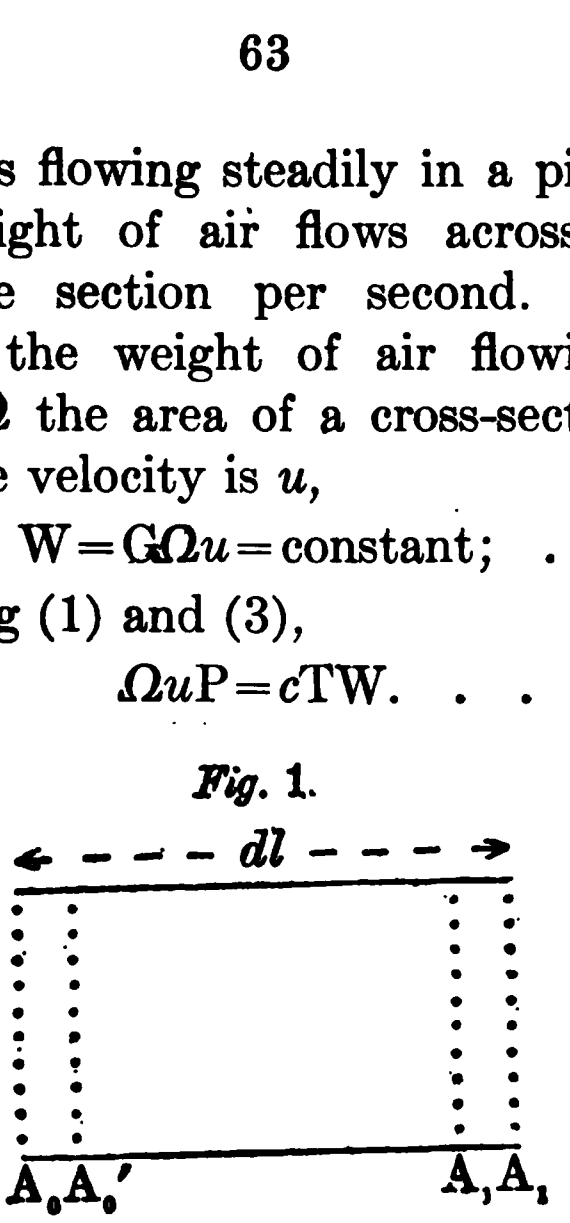

Fig. 1 represents a short length dl of an air-main, between transverse sections A_0, A_1. Let d be the diameter, Ω the cross-section, m the hydraulic mean radius of the pipe. Let P and u be the pressure and velocity at A_0, $P+dP$ and $u+du$ the same quantities at A_1. Let W be the weight of air flowing through the pipe per second. The units are feet and lbs.

If in a short time dt the mass A_0A_1 comes to $A_0'A_1'$, then $A_0A_0' = u\,dt$ and $A_1A_1' = (u+du)dt$.

By analogy with liquids, the head lost in friction, measured in feet of fluid, is

$$\zeta\frac{u^2}{2g}\frac{dl}{m}.$$

Let $H = \frac{u^2}{2g}$; then the head lost is

$$\zeta H\frac{dl}{m};$$

and since W dt is the flow through the space considered in the time dt, the work expended in friction is,

$$-\zeta\frac{H}{m}W\,dldt.$$

The change of kinetic energy in the time dt is the difference of the kinetic energy of A_1A_1' and A_0A_0'; that is,

$$\frac{W\,dt}{2g}\{(u+du)^2-u^2\}$$

$$\frac{W}{g}ududt = Wdudt.$$

The work of expansion of $\Omega u\, dt$ cubic feet of air to $\Omega(u+du)\, dt$, at a pressure initially P, is $\Omega \mathrm{P}\, du\, dt$. But from (3*a*)

$$u=\frac{c\mathrm{TW}}{\Omega \mathrm{P}},$$

$$\frac{du}{d\mathrm{P}}=-\frac{c\mathrm{TW}}{\Omega \mathrm{P}^2},$$

and the work done by expansion is

$$-\frac{c\mathrm{TW}}{\mathrm{P}}d\mathrm{P}dt.$$

The work done by gravity is zero if the pipe is horizontal, and in most cases may be neglected without great error. The work of the pressures on the sections $\mathrm{A}_0\mathrm{A}_1$ is

$$\begin{aligned}&\mathrm{P}\Omega u dt-(\mathrm{P}+d\mathrm{P})\Omega(u+du)dt\\&=-(\mathrm{P}du+ud\mathrm{P})\Omega dt.\end{aligned}$$

But if the temperature is constant,

$$\begin{aligned}&\mathrm{P}u=\text{constant},\\&\mathrm{P}du+ud\mathrm{P}=0,\end{aligned}$$

and the work of the pressures is zero.

Adding together the quantities of work

and equating them to the change of kinetic energy,

$$W\,dH\,dt = -\frac{cTW}{P}\,dP\,dt - \zeta\frac{H}{m}W\,dl\,dt$$

$$dH + \frac{cT}{P}dP + \zeta\frac{H}{m}dl = 0,$$

$$\frac{dH}{H} + \frac{cT}{HP}dP + \zeta\frac{dl}{m} = 0. \quad . \quad . \quad (4)$$

But

$$u = \frac{cTW}{\Omega P},$$

$$H = \frac{u^2}{2g} = \frac{c^2T^2W^2}{2g\Omega^2P^2},$$

$$\frac{dH}{H} + \frac{2g\Omega^2P}{cTW^2}dP + \zeta\frac{dl}{m} = 0.$$

For pipes of uniform section Ω and m are constant, for steady motion **W** is constant, and for isothermal flow **T** is constant. Integrating,

$$\log H + \frac{g\Omega^2P^2}{W^2cT} + \zeta\frac{l}{m} = \text{constant.} \qquad (5)$$

For $l=0$, let $H=H_1$ and $P=P_1$,
" $l=L$, let $H=H_2$ and $P=P_2$,

$$\log\frac{H_2}{H_1} + \frac{g\Omega^2}{W^2cT}(P_2^2 - P_1^2) + \zeta\frac{L}{m} = 0, \qquad (6)$$

where P_1 is the greater and P_2 the less pressure. By replacing H_1, H_2, and W,

$$\log\frac{P_1}{P_2}+\frac{gcT}{u_1^2P_1^2}(P_2^2-P_1^2)+\zeta\frac{L}{m}=0. \quad (6a)$$

Hence the initial velocity in the pipe is

$$u=\sqrt{\left\{\frac{gcT(P_1^2-P_2^2)}{P_1^2\left(\zeta\frac{L}{m}+\log\frac{P_1}{P_2}\right)}\right\}};$$

and when L is great, $\log\frac{P_1}{P_2}$ is comparatively small compared with the other term in the bracket. Then

$$u_1=\sqrt{\left\{\frac{gcTm}{\zeta L}\,\frac{(P_1^2-P_2^2)}{P_1^2}\right\}}\ .\ . \quad (7)$$

For pipes of circular section $m=\frac{d'}{4}$, where d' is the diameter in feet. Let cT. $=27,690$, and let p_1, p_2 be the pressures in lbs. per square inch. Then

$$u_1=\sqrt{\left\{222,900\frac{d'}{\zeta L}\,\frac{(p_1^2-p_2^2)}{p_1^2}\right\}}. \quad (7a)$$

This equation is easily used. In some cases the approximate equation

$$u_1=\left(1.1319-0.7264\frac{p_1}{p_0}\right)\sqrt{\left(222{,}900\frac{d'}{\zeta L}\right)} \quad (8)$$

may be more convenient.

If the terminal pressure p_2 is required in terms of the initial pressure p_1, then

$$p_2=p_1\sqrt{\left\{1-\frac{\zeta u_1^2 L}{222{,}900d'}\right\}} \quad . \quad . \quad (9)$$

If from a series of experiments ζ is to be found,

$$\zeta=222{,}900\frac{d'}{u_1^2 L}\frac{(p_1^2-p_2^2)}{p_1^2}. \quad . \quad (10)$$

Before proceeding to calculate the value of ζ from the experiments of Professor Riedler and Professor Gutermuth on the Paris mains, it is necessary to examine the corrections to be made for leakage and the special resistances of the draining-boxes.

Loss of Air by Leakage from the Main.—Special experiments were made by Professor Riedler and Professor Gutermuth to determine the leakage loss in portions of the old Paris main. These gave the following results:

	I.	II.	III.	IV.	V.	VI.
	Southern Section. Central Works to Pl. de la Concorde.	Entire Pipe Line.	Central Station to Pl. de la Concorde.	Entire Pipe Line.	Northern Section. Central Station to Rue de Belleville.	Rue des Pyrenées.
L'ngth in miles...	5.69	10.69	5.69	10.69	0.87	0.34
Initial pressure in atmospheres..	6.5	6.9	7.0	6.7	6.0	6.1
Terminal pressure	6.0	5.9	6.43	5.82	5.0	3.7
Loss of pressure per hour in atmospheres..	1.5	1.5	0.57	1.32	0.6	0.56
Loss of air in cu. ft. per hour reckoned at atmospheric pressure	34300	67000	13000	59000	2100	782
Loss of air in cubic feet per mile per hour	6030	6270	2285	5520	2414	2300

It is stated that during trials I, II, and IV considerable leakage was known to exist at the Central Station and the Rue de Belleville. In all the trials the air consumed by the clock system and some small motors not stopped is included. Reduced, as shown in the last line, the results are consistent if it is assumed that the leakage was really greater in the sections included in I, II, and IV than in the other sections.

Now, with an initial gauge-pressure of 6 atmospheres and an initial velocity of 30 feet per second, the main would deliver about 600,000 cubic feet of air per hour, reckoned at atmospheric pressure. Then the percentage of loss by leakage per mile per hour would be as follows:

	I.	II.	III.	IV.	V.	VI.
Per cent of air lost by leakage per mile per hour.....	1.00	1.05	0.38	0.91	0.40	0.38

Professor Riedler believes that in newer and better-laid mains the leakage is considerably reduced. In any case it appears that the loss is small and practically can be neglected except in very long transmissions, at least when the main is delivering a full supply. It should be remembered, however, that the leakage is proportionately greatest in those hours when the pressure has to be maintained in the mains, but the demand for power is small. Where the demand for power is very variable this loss might become an appreciable factor. Looking to the uncertainty as to the amount and law of variation of leakage in different cases, it will be neglected in this investigation, taking the experiments above referred to as a proof that it is not a serious quantity even in the Paris installation, and that in newer mains laid with the experience now gained it would be still less important.

Correction for Loss of Pressure at Draining-tanks.—In some of the mains experimented on by Professor Riedler there were draining-tanks at which there was a sensible loss of pressure. The resistance at such a receiver must be analogous to the loss at a sudden enlargement of a pipe, and we may therefore write, if $\mathfrak{P}$ is the pressure lost, p the absolute pressure of the air, and v its velocity

$$\mathfrak{P} = \zeta_d p v^2,$$

where ζ_d is the coefficient of resistance to be determined by experiment. Some experiments were made by Professor Riedler on these draining-tanks. The following table gives the results and the calculated value of ζ_a:

Absolute Pressure p	Velocity of Air in Main.	Observed Loss of Pressure at One Draining-tank. $\mathfrak{P}$.	Calculated Value of ζ_d.
Lbs. per Sq. Inch	Feet per Second.		
104.6	19.5	0.94	0.00002363
104.1	19.0	0.95	0.00002527
84.1	28.5	2.42	0.00003543
106.9	24.25	2.14	0.00003404
102.0	18.25	1.00	0.00002943
		Mean . . .	0.00002956

These figures are fairly accordant, and the loss at each draining-tank may be taken as

$$\mathfrak{P}=0.00003pv^{2}. \quad . \quad . \quad (11)$$

Experiments by Professor Riedler and Professor Gutermuth on the Resistance of the Paris Air-Mains.—The old air-mains of Paris consist of cast-iron pipes 30 centimetres = $11\frac{3}{4}$ inches = 0.98 foot in diameter. It was on these that the experiments were made. For the new station wrought-iron pipes of 20 inches diameter are being used. The importance of these experiments lies chiefly in the large scale on which they were carried out. The volumetric efficiency of the compressors was first determined. Then, at different points on the pipe-line, the pressure was observed when the compressors were running at known speeds. On Sundays the whole pipe-line could be coupled up, all work in the city being stopped. The air then passed through the southern main and back by the northern main, a distance of 10 miles.

The main is somewhat complicated, ha
ing been constructed piecemeal duri
the gradual extension of the enterpris
In the 10-mile length there are fo
draining-tanks, twenty-three drainin
traps or siphons, and forty-two sto
valves. The resistance of these is i
cluded in the observed results. It a
pears, however, that the most serio
additional resistance was that of t
draining-tanks, and as special exper
ments were made on these, their resis
ance can be estimated with very approx
mate accuracy and allowed for.

The following table gives the resul
of the experiments reduced to Englis
measures. The columns marked with a
asterisk are those taken directly fro
Professor Riedler's Tables. The othe
are deduced from his figures.

The last column gives the values of
calculated by equation (10).

It will be seen that the values of ζ ar
fairly consistent, considering the difficul
of the observations. The discrepan
are irregular, and obviously due t

XPERIMENTS ON

* Initial Pressure in Lbs. per Sq. Inch p_1 (Abso-lute).	* Termi Pressu in Lb per Sq. In p_2 (Abs lute)	Initial Velocity in Feet per Second v_1.	ζ
106.6	77.	24.69	0.00229
114.4	78.	23.09	0.00316
119.4	100.	17.82	0.00280
116.1	107.	13.31	0.00255
114.4	108.	10.99	0.00229
116.1	111.	16.55	0.00327
119.4	116.	10.83	0.00449
114.4	105.	23.09	0.00345
119.4	113.	17.82	0 00397
102.9	100.	20.68	0.00214
112.5	108.	13.71	0.00184
107.7	107.	14.31	..
113.9	110.	14.40	0.00365
108.3	105.	16.06	0.00181
		....	0.00290

lt so anomalous or record.

To face p. 74.

THE NEW YORK
PUBLIC LIBRARY

ASTOR, LENOX AND
TILDEN FOUNDATIONS.

inconsistencies in the data of the experiments. For instance, experiments XIII and XIV were made on the same main at nearly the same initial pressure. In XIV the velocity was sensibly greater than in XIII, but the loss of pressure is much greater in XIII than in XIV.

Professor Riedler appears to believe that his experiments on the Paris main show that the friction of air in pipes is considerably less than it was believed to be from the results of earlier experiments on a smaller scale. The author does not think that this is so, but that, on the contrary, when properly reduced they are consistent with previous results, and that all the known experiments fairly support each other. In a paper on the Coefficient of Friction of Air flowing in long pipes,* it was shown that Mr. Stockalper's experiments gave the following results:

		$\zeta =$
Mean for	0.492-foot pipe	0.00449
“	0.656-foot pipe	0.00377

---

* Minutes of Proceedings Inst. C. E., vol. lxiii., p. 299.

These experiments, as well as some others given in that paper, show that the value of ζ for air as well as for water decreases as the size of the pipe is larger. Though experiments on the flow of air are not numerous enough to furnish any very trustworthy law, the author gave in 1880 the following expression for the value of ζ:

$$\zeta=0.0027\left(1+\frac{3}{10d'}\right).$$

This gives the following values for ζ,

		$\zeta=$
Pipe	0.492 foot diameter	0.00435
"	0.656 " "	0.00393
"	0.980 " "	0.00351

which are only a little different from those deduced from Stockalper's and Riedler's experiments.

Rounding off slightly the mean of Professor Riedler's results, it will be assumed in the remainder of this paper flowing in pipes of not less than 1 foot diameter, $\zeta = 0.003$. Putting this value in equations (7a) and (9)

$$u_1 = \sqrt{\left\{ 74{,}300{,}000 \frac{d'}{L} \frac{(p_1^2 - p_2^2)}{p_1^2} \right\}}, \quad (12)$$

$$p_2 = p_1 \sqrt{\left\{ 1 - \frac{v_1^2 L}{74{,}300{,}000 d'} \right\}}. \quad . \quad (13)$$

Loss of Pressure per Mile of Pipe.—In order to indicate what kind of results this formula leads to, the following cases have been calculated:

1. Given the diameter of the pipe, and the initial pressure and velocity of the air entering the main, it is required to find the loss of pressure in 1 mile of transmission. By simple transposition, putting L=5280,

$$p_2 = p_1 \sqrt{\left\{ 1 - \frac{v_1^2}{14{,}072 d'} \right\}}. \quad . \quad (14)$$

Assuming initial velocities of 25, 50, and 100 feet per second, and initial pressures of 50, 100, and 200 lbs. absolute, the following values are obtained:

Diameter of Pipe.	Initial Velocity, v_1.	Values of Terminal Pressure, p_2, when			Percentage of Initial Pressure Lost in One Mile.
		$p_1=50$.	$p_1=100$.	$p_1=200$.	
Feet.	Feet per Second.				
1.0	25	48.8	97.7	195.4	2.4
..	50	45.3	90.6	181.2	9.4
..	100	26.9	53.8	107.6	46.2
2.0	25	49.4	98.9	197.8	1.2
..	50	47.7	95.4	190.8	4.6
..	100	40.1	80.3	160.6	19.8

The percentage of pressure lost in a mile is the same whatever the initial pressure. It must not, however, be assumed that the loss in 2 miles is double the loss in 1 mile. The velocity increases and the density diminishes going along the main.

It is clear that when the velocity initially in the main exceeds 50 feet per second, the loss of pressure becomes serious even in a distance of a mile. How far th[illegible] a loss of efficiency will be [illegible]ode of looking at the question is interesting. Suppose the percentage loss of pressure is assumed and the initial velocity calculated. In the following table this has been done for transmissions to distances of 1, 5, 10, and 20 miles.

Length of Main in Miles.	Diameter of Main in Feet.	Initial Velocity, v_1, when the Percentage Loss of Pressure in Transmission is				
		1	2½	5	10	20
1	1	16.7	26.3	37.0	52.5	73.1
	2	23.7	37.3	52.4	71.18	100.6
5	1	7.5	11.8	16.5	23.5	31.8
	2	10.6	16.6	23.3	33.2	44.9
10	1	5.3	8.3	11.3	16.6	22.5
	2	7.4	11.7	15.9	23.4	31.8
20	1	3.7	5.9	8.3	11.8	16.0
	2	5.4	8.3	11.7	16.6	22.6

Transmission is possible to the longest distances here assumed at velocities not impracticably low, with losses of pressure which would not hinder efficient use of the air.

ACTION OF THE AIR-COMPRESSORS.

When an air-compressor is driven by a steam-engine there is a difference between the work done by the steam and the work done on the air, due to the work expended in friction of the mechanism and measured by the difference of area of the indicator-diagrams of the steam-cylinder and compression-cylinder. If the compressor is driven by water-power there will also be a corresponding loss in friction of the mechanism, probably not widely different in amount. It will be sufficient here to consider a compressor driven by steam.

Let U be the work expended, measured on the steam-cylinder indicator-diagram, and U_1 the corresponding work shown on the compressor-cylinder diagram. Then if η_1 is the efficiency of the mechanism,

$$U_1 = \eta_1 U.$$

It is convenient at present to take U and U_1 to be the work in foot-pounds per pound of air compressed. In Professor

Kennedy's tests of some of the older compressors at Paris it appeared that $\eta_1=0.845$. Experiments by Professor Gutermuth on the new Riedler compressor gave $\eta_1=0.87$, a result not widely different.

In all compressors there are some losses of work due to clearance, to imperfect action of the valves, to leakage, and to other causes. But unless the machine is badly constructed these need not be large. If the air is compressed to a pressure above that in the mains—as has happened in some cases—there is a loss, for the unbalanced expansion uselessly heats the air; but this again can be kept within narrow limits if the valves act promptly and properly. The chief loss of work in compressors is due to useless heating of the air. It is not, of course, impossible that some of the heat thus generated should be usefully employed. But to make use of it would involve complications. It is said that in Birmingham, where the distance of transmission is not great, some of the heat reaches the motors, and then there is an economy in the amount of air used. But practically in most cases heat given to the air in the compressor is in fact wasted before the air is used for motive purposes. A perfect compressor for power distribution would be one in which the air taken in at atmospheric pressure p_a should be compressed isothermally to an absolute pressure p_1 equal to that in the mains at the compressing station, and then delivered into the mains without valve-resistance.

Such a machine working without friction, or clearance, or valve-losses, would require for each pound of air compressed an amount of work given by the equation

$$U_2 = \mathrm{P}_a \mathrm{V}_a \log_e \frac{p_1}{p_a} \text{ foot-lbs.},$$

where P_a is the atmospheric pressure in lbs. per sq. ft. and V_a the volume of 1 lb. of air at that pressure.

If, as hitherto assumed, the initial temperature of the air is 60° Fahr.,

$$\mathrm{U}_2 = 27{,}690 \log_e \frac{p_1}{p_a}.$$

Fig. 2 shows the indicator-diagram of such an engine. OADE is the work

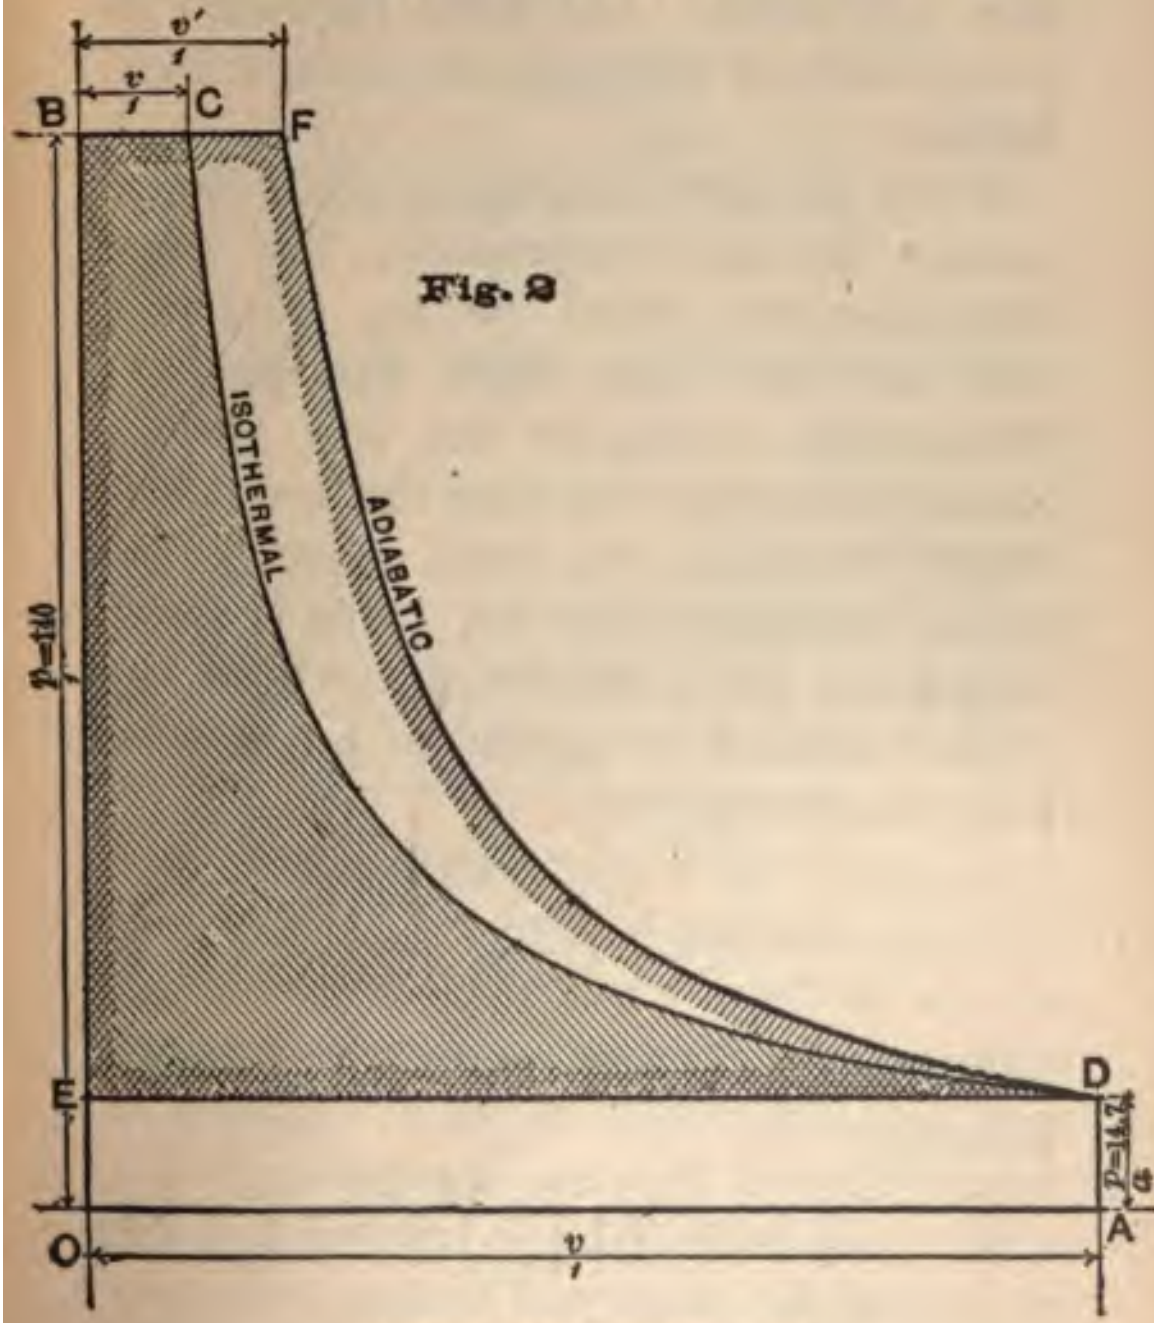

Fig. 2

ACTION OF COMPRESSOR.

done by the atmosphere on the piston in the suction stroke. OBCDA is the work done on the air in the compressing stroke, the compression-curve DC being a common hyperbola. The work expended in compression is therefore the shaded area, EBCD.

If the air were compressed without any cooling during compression, the compression-curve would be an adiabatic, such as DF. The work expended in compression would be the area BFDE. Consequently in that case the area CFD would represent the work expended in useless heating of the air. This is easily calculated, for it can be shown that the work expended per pound of air in adiabatic compression is

$$\frac{\gamma}{\gamma-1}P_aV_a\left[\left(\frac{p_1}{p_a}\right)^{\frac{\gamma-1}{\gamma}}-1\right].$$

Putting $\gamma=1.408$ and $P_aV_a=27,690$ as before,

$$U_2'=95,458\left[\left(\frac{p_1}{p_a}\right)^{0.29}-1\right]. \quad (15)$$

If $\eta_2=U_2/U_2'$, then η_2 may be termed the efficiency of the compressing process.

For simple adiabatic compression, neglecting clearance and friction losses

$$\eta_2 = \frac{\log_e \frac{p_1}{p_a}}{3.44\left[\left(\frac{p_1}{p_a}\right)^{0.29} - 1\right]}.$$

This may be called the theoretical value of η_2.

p_1	p_a	$\frac{p_1}{p_a}$	Theoretical Value of η_2.
44.1	14.7	3	0.85
73.5	....	5	0.78
102.9	....	7	0 74
147.0	....	10	0 70

It is clear, therefore, that if the air is not cooled during compression the efficiency of the process decreases as the pressure to which the air is compressed is greater. Now in most cases the cooling arrangements are very imperfect, and the compression is nearly adiabatic. Consequently there has been reluctance to use high initial pressures, and this diminishes the facility for distributing power by compressed air. As the other losses besides that due to heating are serious, the whole efficiency of the compressor is considerably less than the values calculated above.

Fig. 3 shows an actual diagram from one of the best of the older Colladon

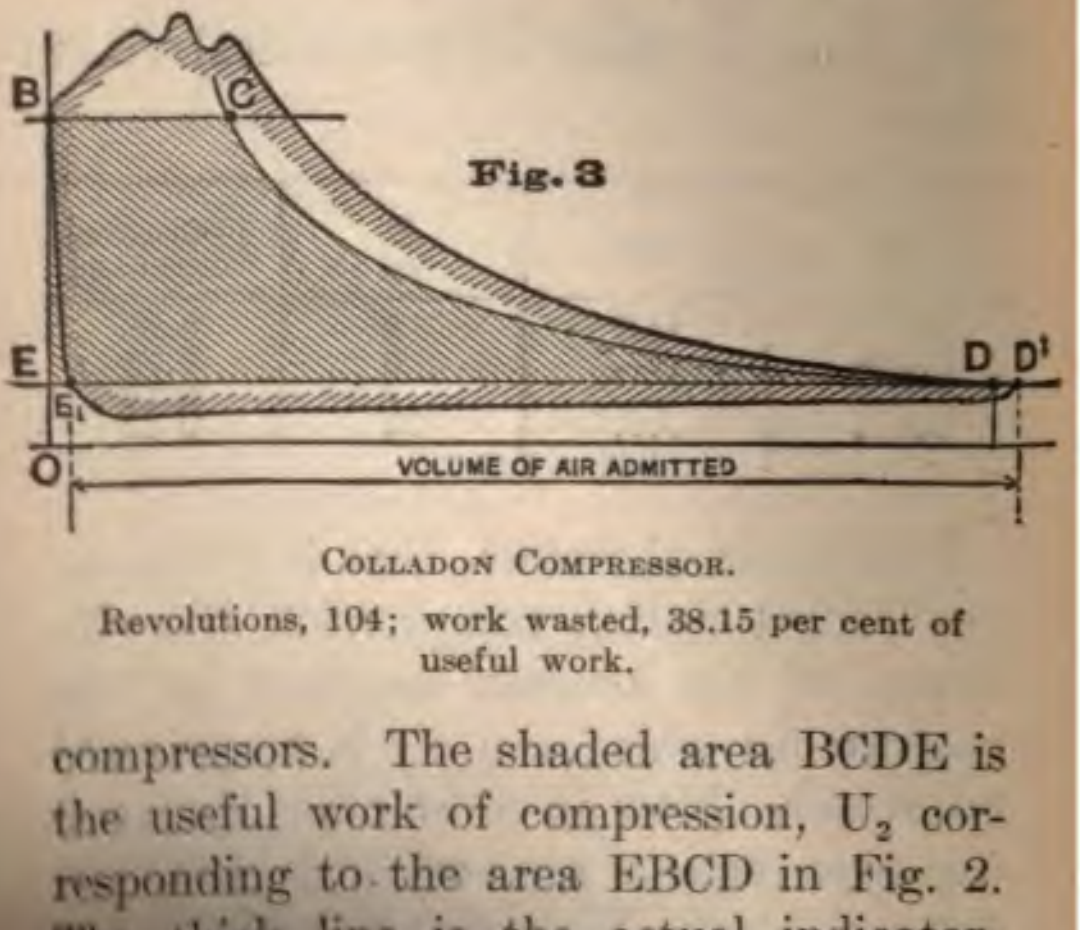

Fig. 3

Colladon Compressor.

Revolutions, 104; work wasted, 38.15 per cent of useful work.

compressors. The shaded area BCDE is the useful work of compression, U_2 corresponding to the area EBCD in Fig. 2. The thick line is the actual indicator-di It will be seen that the actual 38.15 per cent larger than the gram for the volume of air admitted, the difference being due partly to the waste of work in heating the air and partly to valve-resistance, causing a loss of pressure in the suction-stroke and an excess pressure during delivery into the mains. In this case η_2, measured from the diagram, is 0.72. In several compressors tried by Professor Riedler, the loss of work in the compressing process was twice as great as in this case. Fig. 4 shows a similar diagram for one of

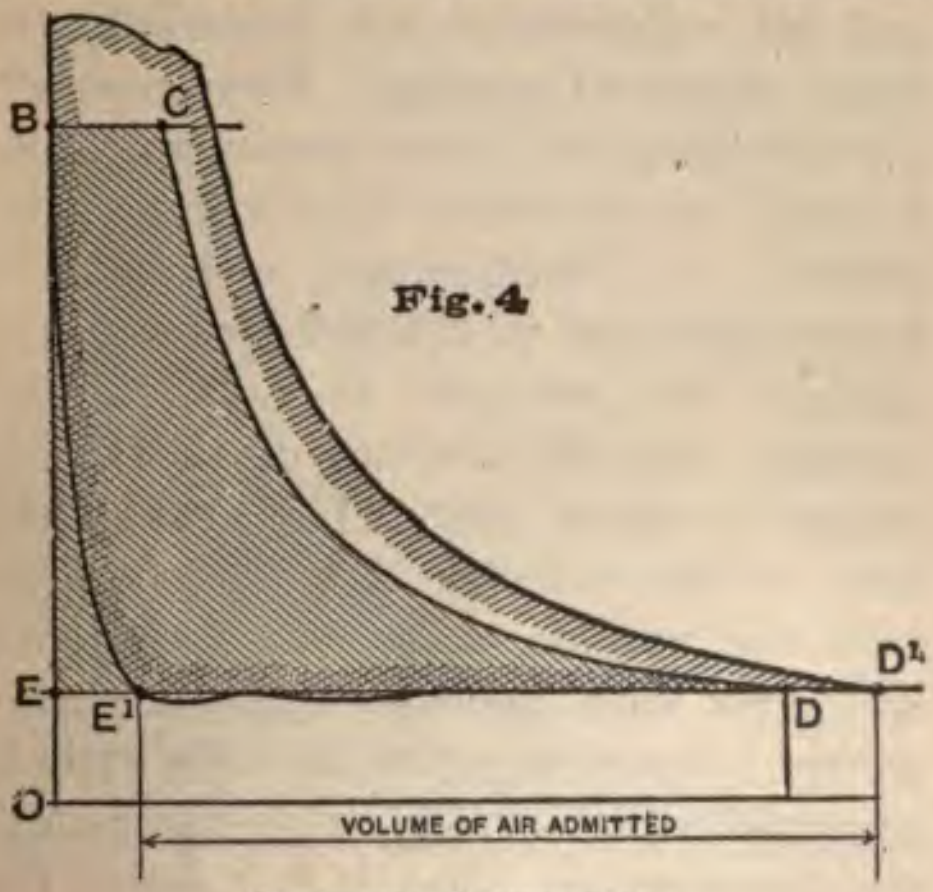

Fig. 4

Cockerill Compressor.

the Cockerill compressors at Paris. The excess work here is 40.2 per cent of the useful work, and consequently $\eta_2=0.70$.

Obviously, part of this loss can be saved if the air is cooled during compression, and all compressors are provided with some means of cooling. Very generally a water-jacket to the compressing cylinder is used, but the action of this is very imperfect. At Birmingham, although the compressors are well water-jacketed, and though the pressure is only 45 lbs. (gauge), the temperature of the air delivered is about 280°. The area of surface of the cylinder is small compared with the volume of air compressed, and air parts with heat to a metal surface slowly. Spray injection into the cylinder answers much better in keeping down the temperature. But it is believed that the result is partly deceptive, the cooling going on after the air is completely compressed, so that the compression-curve is hardly so much flattened as might be expected from the temperature at which the air is delivered.

The only remaining means of reducing the loss of work by heating is to compress

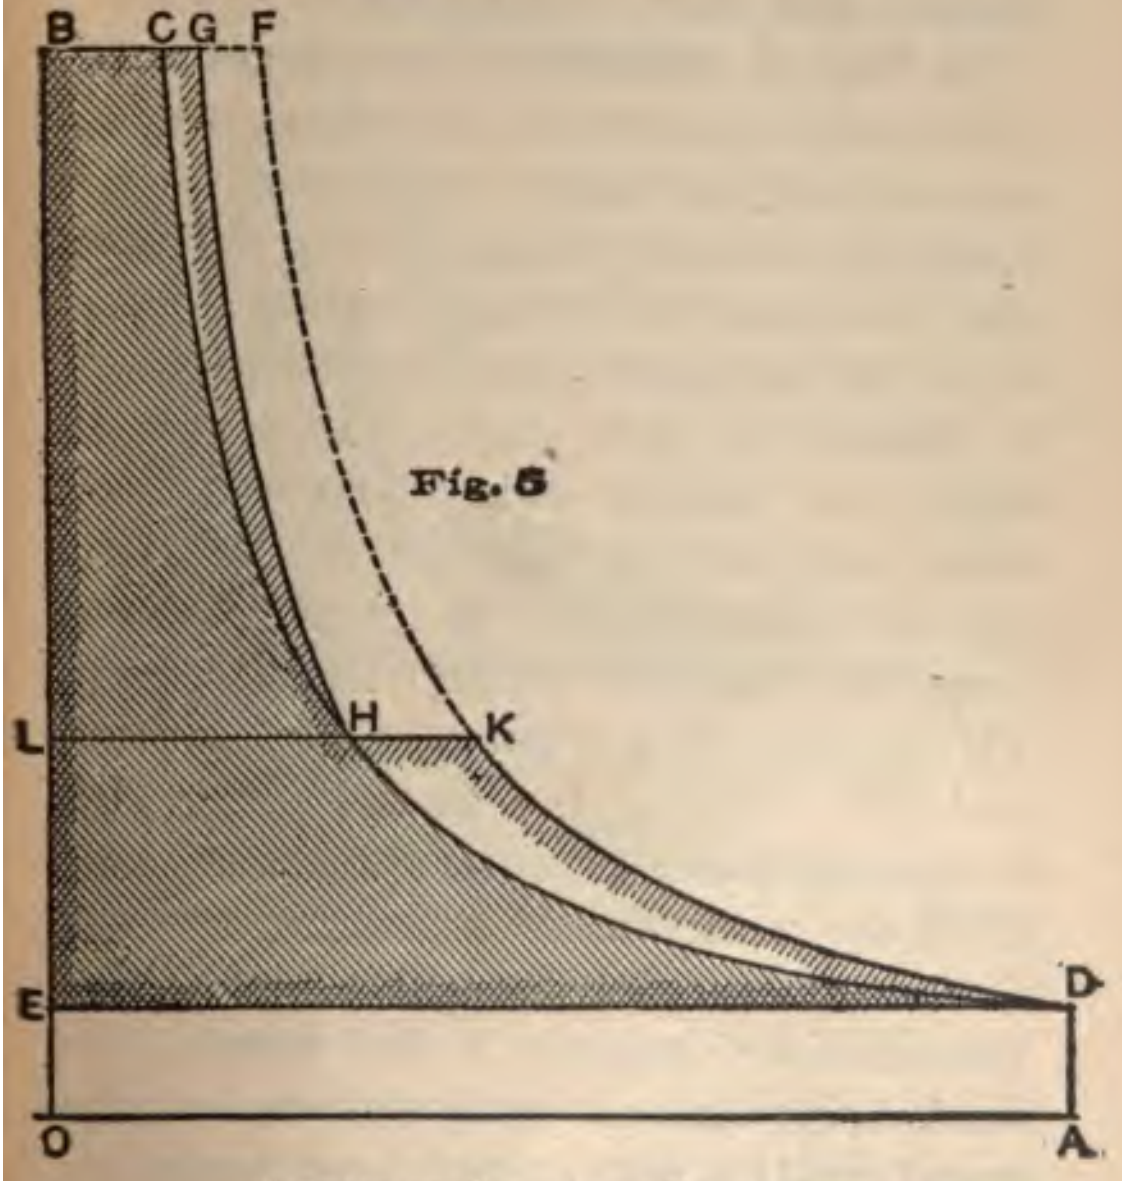

Action of Compound Compressor.

in two or more stages, and cool the air thoroughly between the stages. This intermediate cooling can be easily effected, the air being taken through tubular vessels presenting any amount of cooling surface that may be required.

In Fig. 5, EBCD is the diagram of isothermal compression as before. DF is an adiabatic, so that in single-stage compression, without cooling, CDF represents the work lost in useless heating. Now let it be supposed that the compression is effected in two stages. In the first stage, no cooling being assumed, the work lost will be the area HKD. But the air is then cooled to its initial temperature, and the volume shrinks from LK to LH. H is a point on the isothermal DC. During the second stage HG is the adiabatic compression-curve, and CGH the work wasted in heating the air. It can now be seen that the effect of the intermediate cooling is to reduce the work expended in compression by the area GFKH a very material quantity.

It is this stage-compression with intermediate cooling, and with spray-injection also, [illegible] Professor Riedler has adopted [illegible] compressors for Paris, with marked increase of efficiency. Fig. 6 shows an actual diagram from one of the Riedler compressors, and it will be seen that the excess compression is only 12.07

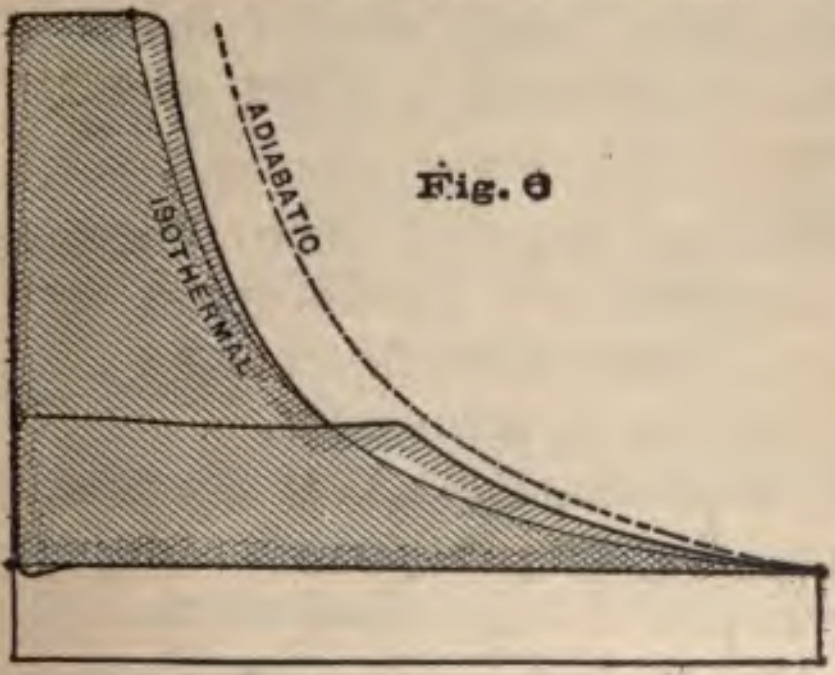

Fig. 6

RIEDLER COMPRESSOR.
Revolutions, 45; wasted work, 12.07 per cent of useful work.

per cent, so that in this case η_2 has the high value 0.89.

In using air for transmitting power it is important, with a view of diminishing the size of the mains, to adopt high initial pressures, and it is the inefficiency of the compressing process in ordinary machines which has hitherto prevented the adoption of such pressures. Provided the efficiency of the compressors can be increased, much greater pressure loss can be permitted in the mains, and consequently much smaller mains will suffice to transmit a given amount of power.

PROFESSOR RIEDLER AND PROFESSOR GUTERMUTH'S EXPERIMENTS ON THE EFFICIENCY OF COMPRESSORS.

If, as above, $U_1=\eta_1 U$ is the work expended in compression after deducting the friction of the mechanism, and

$$U_2=27{,}690 \log_e \frac{p_1}{p_a}$$

is the useful work done in compression, then

$$\eta_2=U_2/U_1=U_2/\eta_1 U$$

is a coefficient of efficiency of the compressing process, which includes both the waste of work in useless heating and any losses due to clearance, valve resistance, etc.

Professor Riedler has obtained a series

of indicator-diagrams from different compressor cylinders. On these he has drawn an ideal isothermal diagram without clearance or valve-losses and for compression to the pressure in the main. The excess of area of the actual diagram over the ideal diagram is the work wasted in the compressing process, and from this η_2 is easily calculated. The following table gives a series of such results:

EFFICIENCY η_2 OF COMPRESSION.

Type of Compressor.	Pressure in Main, p_1. Atmos.	Lost Work in Per Cent of Useful Work.	η_2.
Colladon, St. Gothard. . .	6	105.0	0.488
" " " . . .	6	92.0	0.521
Sturgeon.	3	94.3	0.515
Colladon, ...	4	38.15	0.722
Slide-valve compression .	5	49.3	0.670
Paxman	. .	42.7	0.701
Cockerill.	6	40.2	0.713
Riedler two-stage.	6	12.07	0.892

The table shows how very low is the efficiency of some of the older compressors. Even in the compressors in Paris with single-stage compression $\eta_2=0.70$. Hence, if the friction of mechanism is taken account of, and η_1 is put at 0.85, the resultant efficiency is 0.85×0.70

$=0.595$, or less than six-tenths of the indicated work in the steam-cylinder is usefully expended in compression. The Riedler two-stage compressor gives a much better result. Taking $\eta_1=0.87$, its efficiency is 0.77.

Professor Riedler has given some other figures, not based as the above are on the measurement of single diagrams, from which the efficiency of the Paris compressors can be calculated in a more trustworthy way. The following data are given as the result of a series of experiments with each compressor:

Type of Compressors.	For Each Indicated Steam H. P.	
	Cubic Feet of Air at Atmospheric Pressure compressed per Hour.	Pressure in Main, Lbs. per Sq. Inch, Absolute.
Paxman machine (Sturgeon compressors)	264.9	102.9
Cockerill machine (Dubois François com[illegible])	300.2	102.9
Riedler [illegible]-stage compr[illegible]	367.4	102.9

From these figures the following are calculated:

	Steam Work per Hour in Ft.-Lbs.	Weight of Air Compressed in Lbs.	Steam Work per Lb. of Air, $=$ U.	Calculated Work per Lb. for Isothermal Compression, U_2.	$\eta_1\eta_2 = \frac{U_2}{U}$.	η_1.	η_2.
Paxman...	1,980,000	20.24	97,830	53,920	0.551	0.85	0.648
Cockerill..	....	22.94	86,340	......	0.624	0.85	0.735
Riedler....	....	28.06	70,550	......	0.764	0.87	0.898

These results agree well with those obtained above in a different way.

ACTION OF THE AIR-MOTORS.

An air-motor is simply a reversed air-compressor. Hitherto the conditions of efficiency in air-motors have received very little attention. In Paris many of those used are of small size, and in these a good efficiency is not to be expected. The best results have been obtained thus far by adapting old steam-engines to work as air-motors, and this can be done at very little trouble. It is specially desirable that in an air-motor the cylinder-clearance should be small or the compression sufficient. Probably the greatest source of avoidable waste in air-motors has been leakage at the piston. In a steam-engine, the condensation on the cylinder-wall helps to render the piston tight. In an ordinary air-engine the cylinder-surface is more or less dry, and the waste with air from leakage at even small apertures is very great.

A considerable economy can be secured by reheating the air in a simple form of stove before admitting it to the engine. At first sight this seems a complication likely to involve as much trouble as a steam-boiler. That, however, is not at all the case. The reheating appliances are extremely simple, there is no risk of explosion, and the amount of heat which it is desirable to give to the air is insignificant compared with that required in raising steam. Professor Riedler tried an old 80-H. P. steam-engine in Paris which had been adapted to work as an air-motor, and which was actually giving

72 indicated H. P. with compressed air at 5½ atmospheres pressure. It was using about 31,000 cubic feet (reckoned at atmospheric pressure) or about 2376 pounds of air per hour. This air was heated to a temperature of about 300° Fahrenheit by the expenditure of only 15 pounds of coke per hour. On a favorable assumption a steam-engine working to the same power would have required ten times this consumption of fuel at least. Reheating the air has the practical advantage of raising the temperature of exhaust of the motor, and for the amount of heat supplied the economy realized in the weight of air used is surprising. The reason of this is that the heat supplied to the air is used nearly five times as efficiently as an equal amount of heat employed in generating steam.

In certain cases the air-motor cylinder has been jacketed by hot air. This increases again, the amount of work obtained per pound of air used. It can hardly be considered a thermodynamically advantageous process, but it may have advantages practically in raising the exhaust-temperature. Lately in some cases water has been injected in small quantity into the air while passing through the reheating stove. This passes into the engine as steam. It condenses during the expansion, yielding latent heat to the air, and thus raising the temperature of exhaust. Whether it is advisable from a purely thermodynamic point of view may be doubted, but it seems to have practical advantages possibly in lubricating the cylinder and preventing leakage. When steam is employed in this way the expansion curve rises above the adiabatic and becomes nearly an isothermal. The steam may amount to about 5 per cent of the weight of air used.

USEFUL WORK DONE BY AN AIR-MOTOR.

Let the air be delivered from the main to the air-motor at the pressure P_2 in lbs. [illegible] uare foot, or p_2 in lbs. per sq [illegible] First let it be supposed that the air is used in the motor cold, its temperature being taken at 60° Fahrenheit and its volume in cubic feet per lb. being V_2. Expanded adiabatically in an engine down to atmospheric pressure, p_a, the work done would be in foot-lbs. per lb. of air.

$$U_3=\frac{\gamma}{\gamma-1}P_2V_2\left[1-\left(\frac{p_a}{p_2}\right)^{\frac{\gamma-1}{\gamma}}\right]$$

$$=95{,}458\left[1-\left(\frac{p_a}{p_2}\right)^{0.29}\right]. \quad . \quad (16)$$

The actual work obtained in any given motor using air cold will be less than this in consequence of incomplete expansion, valve resistance, clearance, leakage, and other losses. Let the actual work shown on the indicator-diagram of the air-motor be U_4. Then if

$$U_4=\eta_3U_3,$$

η_3 is the efficiency with which the fluid is used in the particular air-motor, a coefficient which must be determined by experiment.

651140

Second. Let it be supposed that the air, arriving in the main with the temperature T_2 (absolute), is reheated to a temperature T_3 before being used in the motor. As it is reheated at constant pressure, the amount of heat to be given to each lb. of air is 183.45 $(T_3 - T_2)$ foot-lbs., or 0.2377 $(T_3 - T_2)$ thermal units. Then the work of adiabatic expansion from a pressure p_2 to atmospheric pressure p_a will be

$$U_3' = \frac{\gamma}{\gamma - 1} P_2 V_2 \frac{T_3}{T_2}\left[1 - \left(\frac{p_a}{p_2}\right)^{\frac{\gamma - 1}{\gamma}}\right]$$

$$= 95{,}458 \frac{T_3}{T_2}\left[1 - \left(\frac{p_a}{p_2}\right)^{0.29}\right]. \qquad (17)$$

Generally the work shown by the indicator-diagram of any engine will be less than this, for the causes mentioned above, and if η_3 is the efficiency with which the motor uses the fluid, the indicated work will be

$$U_4' = \eta_3 U_3'.$$

There is no reason for expecting η_3 to be different in this case from what it was in the previous one, unless hot-air jacketing, or steam injection, is used. In that case η_3 will be larger, and may be taken to include the additional work due to heat supplied during the stroke.

There is yet one more source of loss in the motor, the friction of the mechanism. If η_4 is the efficiency of the mechanism, then

$$U_5 = \eta_4 U_4, \quad \text{or} \quad \eta_4 U_4',$$

is the effective or brake work of the motor per pound of air used.

Experiments on Air-motors by Professor Riedler and Professsor Gutermuth. —In the following tables some of the experiments are quoted, together with the work per pound of air and the values of η_3 and η_4. When Professor Riedler does not give the indicated, but only the brake, H. P. of the motor, it will be assumed that $\eta_4 = 0.85$ in order to calculate a probable value of η_3.

It will be seen that in the older small motors the efficiency with which the fluid is used ranges from 0.37 to 0.44, which perhaps, considering the kind of motor, is a good result. In the later machines, arranged to work expansively, the efficiency ranges from 0.58 to 0.87, results remarkably good for motors so small. The coefficients are rather higher with reheated air, showing that the work done is increased even in a rather higher ratio than T_3/T_2.

Some other experiments on small motors may be passed over in order to consider some experience on an old Farcot steam-engine, with Corliss valves, which had been converted for use as an air-motor.

This engine was nominally of 80 H. P., and worked at 72 indicated H. P. in the trials. In all cases the air was reheated before use to about 300° Fahrenheit. The cylinder was also jacketed by the hot air on its way to the cylinder-chest.

The efficiency is therefore 0.81, an extremely good result.

[illegible] the work obtainable by the [illegible] of one pound of air received [illegible] er sq. in., and at a tempera-

SMALL ROTATING AIR-MOTORS.

Nominal Size.	Revolutions per Minute.	Brake H. P.	Temperature of the Air.		Initial Pressure. Lbs. per Square Inch, Absolute.	Air used in Cubic Feet per Brake H. P. per Hour.	Air used in Lbs. per Brake H. P. per Hour.	Effective Work in Ft.-lbs. of 1 Lb. of Air $= U_5$.	Calculated Work of 1 Lb. of Air Expanded Adiabatically $= U_3$.	$\frac{U_5}{U_3} = \eta_3\eta_4$.	Assumed η_4.	η_3.
			At Admission.	At Exhaust.								
H. P.			Fahr.	Fahr.	*Old Motors without Expansion.*							
½	234	0.506	59	0	73.5	2,330	177.7	11,140	35,670	0.312	0.85	0.368
1	187	1.08	59	5	73.5	1,946	148.5	13,340	35,670	0.374	0.85	0.441
½	241	0.610	122	..	73.5	1,671	127.5	15,530	45,100	0.344	0.85	0.405
1	230	1.42	140	74	73.5	1,625	124.0	15,970	46,500	0.343	0.85	0.404
					Newer Motors with Expansion.							
1	221	1.24	60	−33	73.5	1,470	112.2	17,650	35,670	0.495	0.85	0.583
1	207	1.18	59	−44	73.5	1,286	98.2	20,170	35,670	0.565	0.85	0.665
2	200	2.30	68	−54	73.5	1,060	80.9	24,470	36,210	0.676	0.85	0.796
1	210	1.20	158	38	73.5	961	73.3	27,020	42,380	0.638	0.85	0.751
2	235	2.72	158	..	73.5	848	64.7	30,610	42,380	0.722	0.85	0.850
2	241	3.22	140	28	73.5	848	64.7	30,610	41,150	0.744	0.85	0.876

TRIALS WITH AN 80 HORSE-POWER FARCOT STEAM-ENGINE USED AS AN AIR-MOTOR.

Initial Pr Lbs. per Sq Inch Absolute.	Indicated H. P.	Temperature of the Air.		Air Used in Cubic Feet per Hour.		Lbs. of Air per Hour.		Indicated Work per Lb. of Air $= U_4$.	Brake Work per Lb. of Air $= U_5$.	Work per Lb. of Air Expanded Adiabatically $= U_3'$.	$\frac{U_5}{U_4} = \eta_4$.	$\frac{U_4'}{U_3'} = \eta_3$.
		Admission.	Exhaust.	Per Indicated H. P.	Per Brake H. P.	Per Indicated H. P.	Per Brake H. P.					
95.5	72.3	264	70	469	517	35.7	39.5	55,460	50,130	62,120	0.90	0.89
95.5	72.3	305	84	437	475	33.3	36.2	59,460	54,700	65,630	0.92	0.90
95.5	72.3	320	95	425	465	32.4	35.5	61,120	55,770	66,920	0.91	0.91
95.5	65.0	338	120	438	477	33.5	36.4	59,100	54,400	68,470	0.92	0.87
										Mean. . .	0.91	0.89

ture of 300° Fahrenheit, four-fifths is obtained as effective work on the brake. However, part of this work recovered is borrowed from the hot air before admission to the cylinder and given back to it by the jacket. That the jacket considerably affected the working during expansion is shown by the temperature during exhaust. The following table gives the temperatures the air would have reached by adiabatic expansion, and the actual temperatures of the exhaust in the experiments above:

Initial Temperature.		Final Temperature for Adiabatic Expansion.		Actual Final Temperature, Fahr.	Increase of Temperature of Exhaust due to Jacket.
Fahr.	Absolute.	Fahr.	Absolute.		
264	725	−75	386	+ 70	145
305	766	−53	408	+ 84	137
320	781	−45	416	+ 95	140
338	799	−35	426	+120	155

PRACTICAL CALCULATIONS ON THE DISTRIBUTION OF POWER BY COMPRESSED AIR.

It will be convenient first to give a summary of the formulas required in settling a system of compressed-air distribution; and afterwards to discuss some special cases.

Let P_a be the pressure in lbs. per sq. ft., p_a the pressure in lbs. per sq. in., V_a the volume of a lb. in cu. ft., T_a the absolute temperature of air admitted from the atmosphere to the compressor.

P_1, p_1, V_1, T_1 the same quantities for air discharged from the compressor into the main.

P_2, p_2, V_2, T_2 the same quantities for air arriving at the point of consumption in the main.

U = indicated work done by the steam on the piston of the compressor reckoned in H. P.

$U_1 = \eta_1 U$ = corresponding indicated work in the compressor cylinder.

$U_2 = \eta_2 U_1$ = useful work of compression, or work of isothermal compression from p_a to p_1.

U_3 = available work of air arriving at the motor, or work of adiabatic expansion from p_2 to p_a.

$U_4 = \eta_3 U_3$ = indicated power of the air-motor.

$U_5 = \eta_4 U_4$ = effective or brake work of the air-motor.

Taking $P_a = 2116.3$, $p_a = 14.7$, $V_a = 13.09$, $T_a = 521°$,

$$P_a V_a = 27,690. \quad . \quad . \quad . \quad (1)$$

If W lbs. of air are compressed per second by U horse-power in the steam-cylinder corresponding to U_1 indicated horse-power in the compressor-cylinder, then, allowing both for friction of mechanism and clearance, leakage, and other losses in compression,

$$550 \eta_1 \eta_2 U = 27,690 W \log_e \frac{p_1}{p_a},$$

$$W = \frac{\eta_1 \eta_2 U}{50.3 \log_e \frac{p_1}{p_a}}. \quad . \quad . \quad . \quad (2)$$

When by conduction in the main the air is at its initial temperature T_a,

$$P_1V_1=27{,}690,$$
$$p_1V_1=192.3. \quad . \quad . \quad . \quad (3)$$

If v_1 is the initial velocity of the air in the main, the diameter of which in feet is d,

$$\frac{\pi}{4}d^2v_1=WV_1=192.3W/p_1,$$

$$d=15.64\sqrt{\frac{W}{p_1v_1}}. \quad . \quad . \quad . \quad (4)$$

The pressure falls in a main of length l in feet from p_1 to p_2, the amount being given by the equation

$$\frac{p_2}{p_1}=\sqrt{\left\{1-\frac{v_1^2l}{74{,}300{,}000d}\right\}}. \quad . \quad (5)$$

The available work of the air arriving at the motor with the pressure p_2 at atmospheric temperature T_a is, if it is used without reheating [illegible] H. P.,

$$U_3=\frac{95,458W}{550}\left[1-\left(\frac{p_a}{p_2}\right)^{0.29}\right]$$

$$=173.5W\left[1-\left(\frac{p_a}{p_2}\right)^{0.29}\right]. \quad . \quad (6)$$

If reheated to T_3 before admission to the motor,

$$U_3'=173.5W\frac{T_3}{T_a}\left[1-\left(\frac{p_a}{p_2}\right)^{0.29}\right]. \quad . \quad (7)$$

Indicated work of motor

$$=U_4=\eta_3 U_3. \quad . \quad . \quad . \quad (8)$$

Brake or effective work of motor

$$=U_5=\eta_4 U_4. \quad . \quad . \quad . \quad (9)$$

Values assumed for the Coefficients of Efficiency.—It appears that the efficiency of the mechanism of compressors is from 0.85 to 0.87. In the following calculations it will be assumed that $\eta_1=0.85$. As to the efficiency of the process of compression, this varies greatly with the type of compressor. In some of the older single-stage compressors it is as low as 0.5. But taking the best of those tried by Professor Riedler and slightly rounding off the values,

For single-stage compressors, $\eta_2=0.7$.
" two-stage " $\eta_2=0.9$.

The loss in the main must be calculated for each special case.

For the air-motors, as it is not intended to discuss the use of air on a small scale, it will be assumed that $\eta_3=0.85$ and $\eta_4=0.9$. These values are slightly below those obtained in the experiments, and the results should therefore be such as are practically realizable in ordinary work.

CASE I.—10,000 H. P. is to be transmitted a distance of 2 miles. Taking $\eta_1=0.85$ and $\eta_2=0.9$ (two-stage compression) the useful work of compression will be 7,650 H. P. Now, let the air be compressed to 4, 8, and 12 atmospheres on the gauge, then the weight of air compressed will be as follows:

Case I.	Initial Gauge Pressure, Atmospheres.	Initial Pressure. Lbs. per Square Inch Absoute.	$\frac{p_1}{p_a}$	Weight of Air Compressed in Lbs. per Second = W.
a......	4	73.5	5	94.54
b......	8	132.3	9	69.10
c......	12	191.1	13	59.29

To ascertain suitable diameters for the main, let initial velocities of 30, 50, and 75 feet per second be assumed. For these velocities, and in the cases described, the diameters required will be as follows:

Case I.	Initial Pressure. Lbs. per Square Inch Absolute.	Initial Velocity in the Main. Feet per Second.	Diameter of Main.	
			In Feet.	In Ins.
a......	73.5	30	3.23	39
		50	2.50	30
		75	2.05	25
b......	132.3	30	2.06	25
		50	1.60	19
		75	1.31	16
c......	191.1	30	1.59	19
		50	1.23	15
		75	1.01	12

None of these mains are impracticable in size, and for the higher pressures and velocities they are surprisingly small, considering that they are shown to be capable of transmitting 10,000 indicated steam H. P. a distance of 2 miles. It remains to examine whether the loss of pressure is serious.

Case I.	Initial Pressure. Lbs. per Square Inch Absolute p_1.	Initial Velocity in the Main. Feet per Second.	Diameter of the Main in Feet.	Terminal Pressure in Lbs. per Square Inch p_2.	Loss of Pressure in Per Cent of Initial Pressure.
a......	73.5	30	3.23	72.0	2.0
		50	2.50	68.0	7.4
		75	2.05	58.2	21.0
b......	132.3	30	2.06	129.4	2.0
		50	1.60	116.5	11.9
		75	1.31	91.1	31.1
c......	191.1	30	1.59	183.4	4.0
		70	1.23	161.7	15.3
		75	1.01	115.4	39.6

None of these losses would render the utilization of the power impossible, and it is only at the highest pressures and velocities that the fall of pressure is serious.

Lastly, the power developed at the air-motor due to 10,000 indicated steam H. P. in the compressor has to be calculated. The air being delivered at a distance of 2 miles, and used cold, the H. P. obtained will be as follows:

Case I.	Initial Pressure. Lbs. per Square Inch Absolute.	Terminal Pressure in the Main. Lbs. per Square Inch Absolute.	Initial Velocity in the Main. Feet per Second.	Indicated H. P. of Air-motor.	Brake or Effective H. P. of Air-motor.
a......	73.5	72.0	30	5,146	4,631
		68.0	50	4,998	4,498
		58.2	75	4,596	4,136
b......	132:3	129.4	30	4,785	4,306
		116.5	50	4,600	4,140
		91.1	75	4,177	3,759
c......	191.1	183.4	30	4,546	4,091
		161.7	50	4,376	3,938
		115.4	75	3,934	3,540

It is very striking how little the efficiency is affected by considerable changes in the initial pressure and velocity in the mains; with the exception of two cases, for 10,000 steam indicated H. P. expended at the compressor there is obtained from 4,400 to 5,100 indicated H. P. at the air-motor. That is to say, the efficiency of the whole arrangement, compressor, main, and air-motor, when the air is used cold, ranges from 44 to 51 per cent, and that with mains of quite moderate size.

If the advantage of reheating at the motor is resorted to, which in no case involves any great additional trouble, and which from the small amount of fuel required can often be carried out with very little additional expense, the H. P. obtained will be as follows: Let it be supposed that the air arriving at the motor at 60° Fahrenheit is reheated to 300° Fahrenheit, as in the case of the Farcot steam-engine, details of which are given above. Then

$$\frac{T_3}{T_a} = \frac{761}{521} = 1.46.$$

Case I.	Initial Pressure. Lbs. per Square Inch.	Terminal Pressure. Lbs. per Square Inch.	Initial Velocity in the Main. Feet per Second.	Indicated H. P. of Motor.	Brake H. P. of Motor.
a......	73.5	72.0	30	7,513	6,761
		68.0	50	7,297	6,567
		58.2	75	6,710	6,039
b......	132.3	129.4	30	6,986	6,287
		116.5	50	6,716	6,044
		91.1	75	6,098	5,488
c......	191.1	183.4	30	6,637	5,973
		161.7	50	6,388	5,749
		115.4	75	5,743	5,168

Here again, excepting two cases, the efficiency reckoned on the indicated power is from 64 to 75 per cent, neglecting the cost of the fuel for reheating.

CASE II.—A long-distance transmission may now be discussed. Suppose, as before, that 10,000 indicated H. P. is developed in the steam-cylinders of the compressors, and is to be transmitted a distance of 20 miles. Taking the same pressures as before, the calculations of the weight of air compressed need not be repeated. The initial velocities previously assumed will, however, be excessive, because the velocity in the main

Case II.	Initial Pressure. Lbs. per Sq. In. Absolute.	Initial Velocity. Feet per Second.	Diameter of Main in Feet.	Diameter of Main in Inches.
d......	73.5	20	3.96	47.5
		35	2.99	35.9
		50	2.51	30.1
e......	132.3	20	2.53	30.4
		35	1.91	22.9
		50	1.60	19.2
f......	191.1	20	1.95	23.4
		35	1.47	17.6
		50	1.23	14.8

increases as the pressure falls, and in this case, as the fall will be considerable, the terminal velocities are much greater than the initial velocities. Initial velocities of 20, 35, and 50 feet per second will be assumed.*

None of these mains is impracticable in size. The following table gives the calculation of the pressure loss:

Case II.	Initial Pressure.	Initial Velocity.	Diameter of Main in Feet.	Terminal Pressure. Lbs. per Sq. In.	Loss of Pressure in Per Cent of Initial Pressure.
d......	73.5	20	3.96	68.0	7.4
		35	2.99	47.6	35.3
		50	2.51	Impossible	....
e......	132.3	20	2.53	116.5	11.9
		35	1.91	38.4	70.9
		50	1.60	Impossible	....
f......	191.1	20	1.95	160.8	15.8
		35	1.47	Impossible	....
		50	1.23	Impossible	....

It turns out on calculation that some of the cases assumed are impossible; that is, the whole initial pressure is insufficient to give the assumed initial velocity. In one other case, the 1.91 foot main with a velocity of 35 feet, the loss of pressure in the main is impracticably large. There remain, however, four cases in which neither the size of main nor the loss of pressure in a transmission to a distance of 20 miles is such as to render the transmission impracticable. In three cases the loss is remarkably small, and the terminal pressure quite suitable for application. For instance, it appears that the air compressed by 10,000 H. P. to 132.3 lbs. per sq. in. can be transmitted to a distance of 20 miles in a 30-inch main with a loss of pressure of only 12 per cent.

---

* See table on page 111.

The power delivered at a distance of 20 miles by air-motors using the compressed air can now be calculated. If the air is used cold the power obtained will be as follows:

Case II.	Initial Pressure. Lbs. per Sq. In. Absolute.	Terminal Pressure. Lbs. per Sp. In. Absolute.	Initial Velocity in Main. Feet per Second.	Indicated H. P. of Motor.	Brake or Effective H. P. of Motor.
d......	73.5	68.0	30	4,989	4,490
		47.6	35	4,017	3,615
e......	132.3	116.5	20	4,598	4,138
f......	191.1	160.8	20	4,365	3,928

If the air is reheated to 300° Fahr., as assumed in the previous case,

Case II.	Initial Pressure. Lbs. per Sq. In.	Terminal Pressure. Lbs. per Sq. In.	Initial Velocity in Main. Feet per Second.	Indicated H. P. of Motor.	Brake or Effective H. P. of Motor.
d......	73.5	68.0	30	7,284	6,555
		47.6	35	5,865	5,278
e......	132.3	116.5	20	6,713	6,041
f......	191.1	160.8	20	6,373	5,735

Here the efficiency of the whole arrangement—calculated on the indicated power, the air being delivered at a distance of 20 miles, and including all losses—is 40 to 50 per cent if the air is used cold, and 59 to 73 per cent if the air is reheated. The results are based absolutely on efficiencies already obtained in similar cases, and the sole loss neglected is possible leakage in the mains.

Fig. 7 is drawn to scale for Case II, *e*. It is a diagram showing the relation of the work expended and useful work recovered when 10,000 H. P. is transmitted 20 miles in a main 30 inches in diameter. AEGB is the work expended in a two-

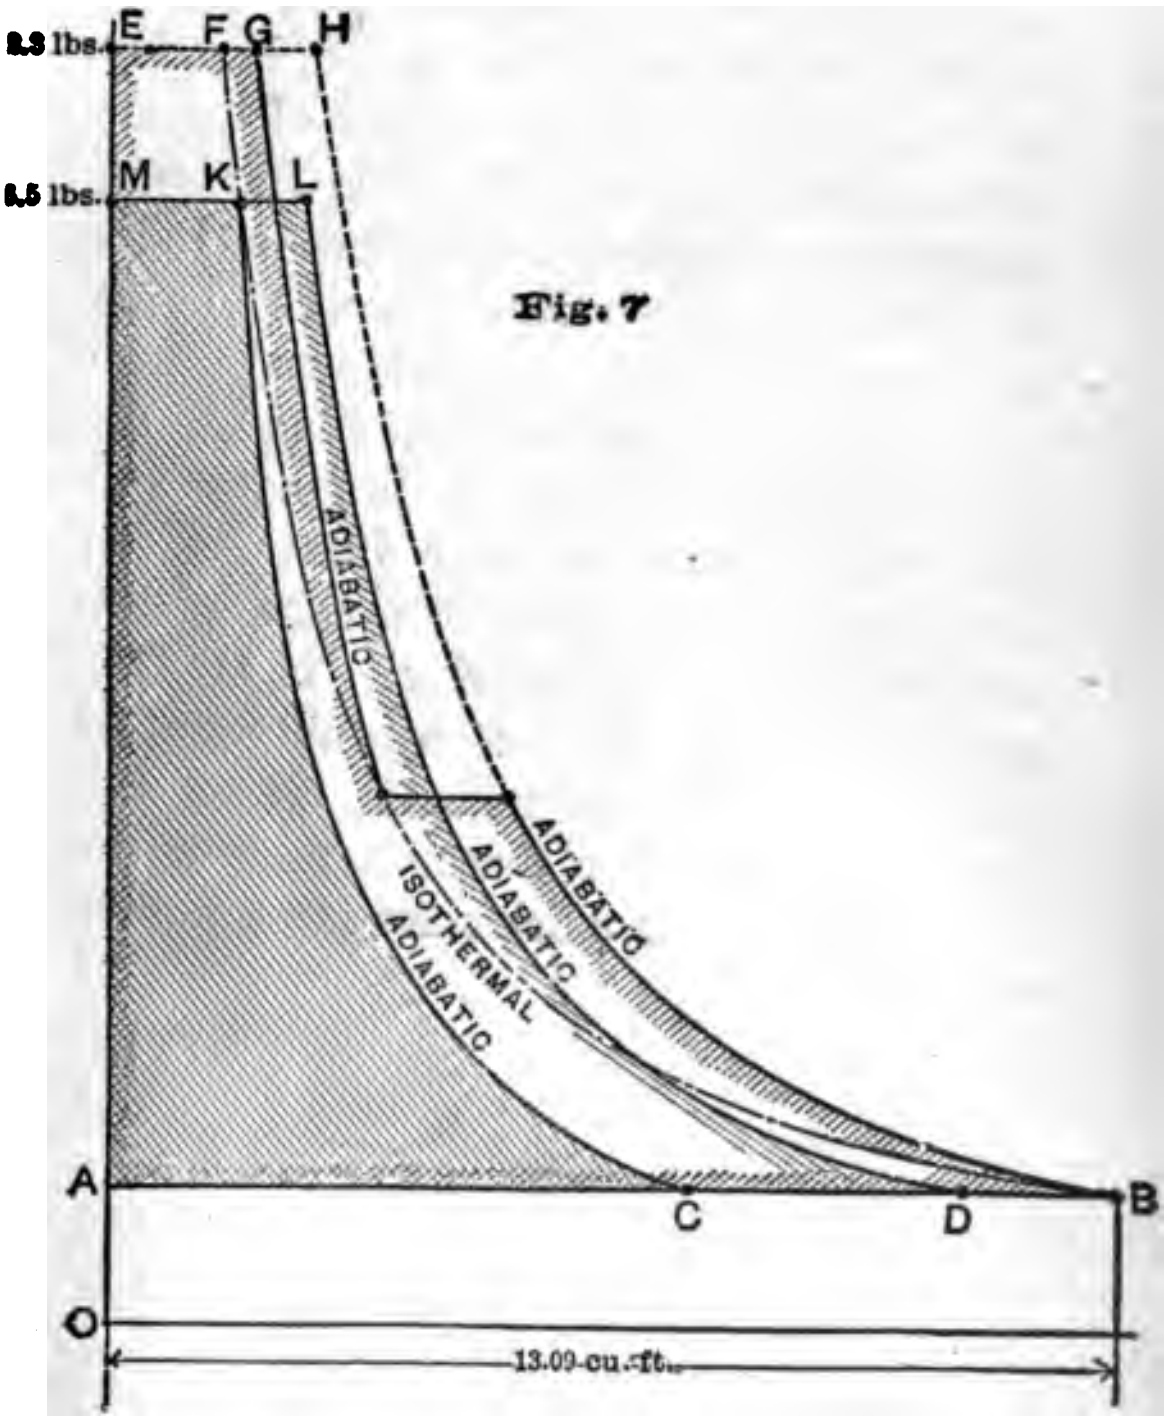

Fig. 7

Combined Action of Compressor Main and Motor.

stage compressor, compressing 1 lb. of air from 14.7 to 132.3 lbs. per sq. in. By cooling in the mains the volume of the air shrinks from EG to EF. The frictional resistance reduces the pressure to 116.5 lbs. per sq. in., when the air has the volume MK determined by the isothermal. The work done by an air-motor, using the air cold, is MKCA. If the air is reheated to 300° the volume expands from MK to ML (1.46 times). Then the work of the air-motor, using reheated air, is MLDA, and KLDC is the important gain of work due to reheating. Of course the areas given by the diagram have to be multiplied by the efficiencies given above.

CATALOGUE
OF THE
SCIENTIFIC PUBLICATIONS
OF
D. VAN NOSTRAND COMPANY,
23 MURRAY STREET AND 27 WARREN STREET, N. Y.

A. B. C. CODE. (See Clausen-Thue.)

ABBOTT (A. V.). The Electrical Transmission of Energy. A Manual for the Design of Electrical Circuits. Second edition, revised. Fully illustrated. 8vo, cloth.. $4 50

ABBOT (Gen'l HENRY L.). The Defence of the Seacoast of the United States. Lectures delivered before the U. S. Naval War College. 8vo, red cloth. 2 00

ADAMS (J. W.). Sewers and Drains for Populous Districts. Embracing Rules and Formulas for the dimensions and construction of works of Sanitary Engineers. Fifth edition. 8vo, cloth. 2 50

A1. CODE. (See Clausen-Thue.)

AIKMAN (C. M., Prof.). Manures and the Principles of Manuring. 8vo, cloth.................... .... 2 50

ALEXANDER (J. H.). Universal Dictionary of Weights and Measures, Ancient and Modern, reduced to the Standards of the United States of America. New edition, enlarged. 8vo, cloth.............. ... 3 50

ALEXANDER (S. A.). Broke Down: What Should I Do? A Ready Reference and Key to Locomotive Engineers and Firemen, Round House Machinists, Conductors, Train Hands and Inspectors. With 5 folding plates. 12mo, cloth.......... .... 1 50

ALLEN (C. F.). Tables for Earthwork Computation. 8vo, cloth 1 50

ANDERSON (J. W.). The Prospector's Hand-book; A Guide for the Prospector and Traveller in search of Metal-bearing or other Valuable Minerals. Seventh edition, thoroughly revised and much enlarged. 8vo, cloth.. 1 50

ANDERSON (WILLIAM). On the Conversion of Heat into Work. A Practical Hand-book on Heat-Engines. Third edition. Illustrated. 12mo, cloth. 2 25

ANDES (LOUIS). Vegetable Fats and Oils: their Practical Preparation, Purification and Employment for various purposes. Their Properties, Adulteration and Examination. A Hand-book for Oil Manufacturers and Refiners, Candle, Soap and Lubricating Oil Manufacturers and the Oil and Fat Industry in general. Translated from the German. With 94 illustrations. 8vo, cloth.............................. 4 00

—— Animal Fats and Oils. Their Practical Production, Purification and Uses for a great variety of purposes, their Properties, Falsification and Examination. A Hand-book for Manufacturers of Oil and Fat Products, Soap and Candle Makers, Agriculturists, Tanners, etc. Translated by Charles Salter. With 62 illustrations. 8vo, cloth.......................net 4 00

ARNOLD (Dr. R.). Ammonia and Ammonium Compounds. A Practical Manual for Manufacturers, Chemists, Gas Engineers and Drysalters. Second edition. 12mo, cloth.................................. 2 00

ARNOLD (E.). Armature Windings of Direct Current Dynamos. Extension and Application of a General Winding Rule. Translated from the original German by Francis B. DeGress, M. E. With numerous illustrations.............................(In Press.)

ATKINSON (PHILIP). The Elements of Electric Lighting, including Electric Generation, Measurement, Storage, and Distribution. Ninth edition. Fully revised and new matter added. Illustrated. 12mo, cloth.. 1 50

—— The E[illegible] of Dynamic Electricity and Magne[illegible] [illegible]ition. 120 illustrations. 12mo, cl[illegible].. 2 00

ATKINSON (PHILIP). Power Transmitted by Electricity and its Application by the Electric Motor, including Electric Railway Construction. New edition, thoroughly revised, and much new matter added. Illustrated 12mo, cloth.... .... 2 00

—— Elements of Static Electricity, with full description of the Holtz and Topler Machines and their mode of operating. Illustrated. 12mo, cloth 1 50

AUCHINCLOSS (W. S.). Link and Valve Motions Simplified. Illustrated with 29 woodcuts and 20 lithographic plates, together with a Travel Scale, and numerous useful tables, Thirteenth edition, revised. 8vo, cloth................................ .... 2 00

AXON (W. E. A.). The Mechanic's Friend. A Collection of Receipts and Practical Suggestions. 12mo, cloth 1 50

BACON (F. W.). A Treatise on the Richards, Steam-Engine Indicator, with directions for its use. By Charles T. Porter. Revised, with notes and large additions as developed by American practice; with an appendix containing useful formulæ and rules for engineers. Illustrated. Fourth edition. 12mo, cloth 1 00

BADT (F. B.). New Dynamo Tender's Hand book. With 140 illustrations. 18mo, cloth............... 1 00

—— Bell Hangers' Hand-book. With 97 illustrations. Second edition. 18mo, cloth.............. .... 1 00

—— Incandescent Wiring Hand-book. With 35 illustrations and five tables. Fifth edition. 18mo, cloth. 1 00

—— Electric Transmission Hand-book. With 22 illustrations and 27 tables. 18mo, cloth 1 00

BALE (M. P.). Pumps and Pumping. A Hand-book for Pump Users. 12mo, cloth..... .... 1 00

BARBA (J.). The Use of Steel for Constructive Purposes. Method of Working, Applying, and Testing Plates and Bars With a Preface by A. L Holley, C. E. 12mo, cloth 1 5

BARKER (ARTHUR H.). Graphic Methods of Engine Design. Including a Graphical Treatment of the Balancing of Engines. 12mo, cloth.... . . 1 5

BARNARD (F. A. P.). Report on Machinery and Processes of the Industrial Arts and Apparatus of the Exact Sciences at the Paris Universal Exposition, 1867. 152 illustrations and 8 folding plates. 8vo, cloth 5 00

BARNARD (JOHN H.). The Naval Militiaman's Guide. Full leather, pocket form.................... 1 25

BARWISE (SIDNEY, M. D., London). The Purification of Sewage. Being a brief account of the Scientific Principles of Sewage Purification and their Practical Application. 12mo, cloth. Illustrated. 2 00

BAUMEISTER (R.). The Cleaning and Sewage of Cities. Adapted from the German with permission of the author. By J. M. Goodell, C. E. Second edition, revised and corrected, together with an additional appendix. 8vo, cloth. Illustrated....... 2 00

BEAUMONT (ROBERT). Color in Woven Design. With 32 Colored Plates and numerous original illustrations. Large 12mo................................ 7 50

BEAUMONT, W. and DUGALD CLERK. Autocars and Horseless Carriages....... .....(In Press.)

BECKWITH (ARTHUR). Pottery. Observations on the Materials and Manufacture of Terra-Cotta, Stoneware, Fire-Brick, Porcelain, Earthenware, Brick, Majolica, and Encaustic Tiles. 8vo, paper. Second edition 60

BERNTHSEN (A.). A Text-Book of Organic Chemistry. Translated by George M'Gowan, Ph. D. Third English edition. Revised and extended by author and translator. Illustrated. 12mo, cloth........... 2 50

BERTIN (L. E.). Marine Boilers: Their Construction and Working, dealing more especially with Tubulous Boilers. Translated by Leslie S. Robertson, Upward of 250 Illustrations. Preface by Sir William White. 8vo, cloth. Illustrated.................. 7 50

BIGGS (C. H. W.). First Principles of Electricity and Magnetism. Being an attempt to provide an Elementary Book for those intending to enter the profession of Electrical Engineering. Second edition. 12mo, cloth. Illustrated............................ 2 00

BLAKE (W. P.). Report upon the Precious Metals. Being Statistical Notices of the principal Gold and Silver producing regions of the world, represented at the Paris Universal Exposition. 8vo, cloth....... 2 00

—— Ceramic Art. A Report on Pottery, Porcelain, Tiles, Terra-Cotta, and Brick. 8vo, cloth............ 2 00

BLAKESLEY (T. H.). Alternating Currents of Electricity. For the use of Students and Engineers. Third edition, enlarged. 12mo, cloth........ .. .... 1 50

BLOUNT (BERTRAM). Electro-Metallurgy .... (In Press.)

BLYTH (A. WYNTER, M. R. C. S., F. C. S.). Foods: their Composition and Analysis. A Manual for the use of Analytical Chemists, with an Introductory Essay on the History of Adulterations, with numerous tables and illustrations. Fourth edition, revised and enlarged. 8vo, cloth 7 50

—— Poisons: their Effects and Detection. A Manual for the use of Analytical Chemists and Experts, with an Introductory Essay on the growth of Modern Toxicology. Third edition, revised and enlarged. 8vo, cloth............. .... 7 50

BODMER (G. R.). Hydraulic Motors; Turbines and Pressure Engines, for the use of Engineers, Manufacturers and Students. Second edition, revised and enlarged. With 204 illustrations. 12mo, cloth...... 5 00

BOILEAU (J. T.). A New and Complete Set of Traverse Tables. Showing the Difference of Latitude and Departure of every minute of the Quadrant and to five places of decimals. 8vo, cloth. 5 00

BOTTONE (S. R.). Electrical Instrument Making for Amateurs. A Practical Hand-book. With 48 illustrations. Fifth edition, revised. 12mo, cloth....... 50

—— Electric Bells, and all about them. A Practical Book for Practical Men. With more than 100 illustrations. 12mo, cloth. Fourth edition, revised and enlarged........ 50

——The Dynamo: How Made and How Used. A Book for Amateurs. Eighth edition. 12mo, cloth... 1 00

BOTTONE (S. R.). Electro Motors: How Made and How Used. A Hand-book for Amateurs and Practical Men. Second edition. 12mo, cloth........ 50

BONNEY (G. E.). The Electro-Platers' Hand-book. A Manual for Amateurs and Young Students on Electro-Metallurgy. 60 illustrations, 12mo, cloth.. 1 20

BOW (R. H.). A Treatise on Bracing. With its application to Bridges and other Structures of Wood or Iron. 156 illustrations. 8vo, cloth........ 1 50

BOWSER (Prof. E. A.). An Elementary Treatise on Analytic Geometry. Embracing Plane Geometry, and an Introduction to Geometry of three Dimensions. 12mo, cloth. Nineteenth edition........ 1 75

—— An Elementary Treatise on the Differential and Integral Calculus. With numerous examples. 12mo, cloth. Sixteenth edition........ 2 25

—— An Elementary Treatise on Analytic Mechanics. With numerous examples. 12mo, cloth. Twelfth edition........ 3 00

—— An Elementary Treatise on Hydro-Mechanics. With numerous examples. 12mo, cloth Fifth edition........ 2 50

—— A Treatise on Roofs and Bridges. With Numerous Exercises. Especially adapted for school use. 12mo, cloth. Illustrated........net 2 25

—— Academic Algebra. Third edition. 12mo, cloth.. 1 25

—— College Algebra. Fourth edition. 12mo, cloth.. 1 75

—— Elements of Plane and Solid Geometry. 12mo, cloth. Second edition........ 1 40

BOWIE (AUG J., Jun., M. E.). A Practical Treatise on Hydraulic Mining in California. With Description of the Use and Construction of Ditches, Flumes, Wrought-iron Pipes and Dams; Flow of Water on Heavy Grades, and its Applicability, under High Pressure, to Mining. Fifth edition. Small quarto, cloth. Illustrated........ 5 00

BURGH (N. P.). Modern Marine Engineering, applied to Paddle and Screw Propulsion. Consisting of 36 colored plates, 259 practical woodcut illustrations, and 403 pages of descriptive matter. The whole being an exposition of the present practice of James Watt & Co., J. & G. Rennie, R. Napier & Sons, and other celebrated firms. Thick quarto, half morocco. 10 00

BURT (W. A.). Key to the Solar Compass, and Surveyor's Companion. Comprising all the rules necessary for use in the field; also description of the Linear Surveys and Public Land System of the United States. Notes on the Barometer, Suggestions for an Outfit for a Survey of Four Months, etc. Fifth edition. Pocket-book form, tuck 2 50

CALDWELL, (G. C.), and A. A. BRENEMAN. Manual of Introductory Chemical Practice. For the use of Students in Colleges and Normal and High Schools. Fourth edition, revised and corrected. 8vo, cloth Illustrated.......... .. .. 1 50

CAMPIN (FRANCIS). On the Construction of Iron Roofs. A Theoretical and Practical Treatise, with wood cuts and Plates of Roofs recently executed. 8vo, cloth............ .... 2 00

CARTER (E. T.). Motive Power and Gearing for Electrical Machinery. A Treatise on the Theory and Practice of the Mechanical Equipment of Power Stations for Electric supply and for Electric Traction. 8vo, cloth. Illustrated........... .... 5 00

CHAMBER'S MATHEMATICAL TABLES, consisting of logarithms of Numbers 1 to 108,000, Trigonometrical, Nautical, and other tables. New edition. 8vo, cloth.................... .. .. 1 75

CHAUVENET (Prof. W.). New Method of Correcting Lunar Distances, and Improved Method of Finding the Error and Rate of a Chronometer, by Equal Altitudes. 8vo, cloth 2 00

CHRISTIE (W. WALLACE). Chimney Design and Theory. A Book for Engineers and Architects, with numerous half-tone illustrations and plates of famous chimneys. 12mo, cloth.................... .... 3 00

CHURCH (JOHN A.). Notes of a Metallurgical Journey in Europe. 8vo, cloth..... .... 2 00

CLARK D. (KINNEAR, C. E.). A Manual of Rules, Tables and Data for Mechanical Engineers. Based

on the most recent investigations. Illustrated with numerous diagrams. 1,012 pages. 8vo, cloth. Sixth edition 5 00
Half morocco 7 50

CLARK D. (KINNEAR, C. E.). Fuel; its Combustion and Economy, consisting of abridgements of Treatise on the Combustion of Coal. By C. W. Williams; and the Economy of Fuel, by T. S. Prideaux. With extensive additions in recent practice in the Combustion and Economy of Fuel, Coal, Coke, Wood, Peat, Petroleum, etc. Fourth edition. 12mo, cloth.. 1 50

—— The Mechanical Engineer's Pocket-book of Tables, Formulæ, Rules and Data. A Handy Book of Reference for Daily Use in Engineering Practice. 16mo, morocco. Second edition........................ 3 00

——Tramways, their Construction and Working, embracing a comprehensive history of the system, with accounts of the various modes of traction, a description of the varieties of rolling stock, and ample details of Cost and Working Expenses. Second edition. Re-written and greatly enlarged, with upwards of 400 illustrations. Thick 8vo. cloth. 9 00

—— The Steam Engine. A Treatise on Steam Engines and Boilers; comprising the Principles and Practice of the Combustion of Fuel, the Economical Generation of Steam, the Construction of Steam Boilers, and the Principles, Construction and Performance of Steam Engines, Stationary, Portable, Locomotive and Marine, exemplified in Engines and Boilers of recent date. 1,300 figures in the text, and a series of folding plates drawn to scale. 2 vols. 8vo, cloth. 15 00

CLARK (JACOB M.). A new System of Laying Out Railway Turn-outs instantly, by inspection from Tables. 12mo, leatherette........................ 1 00

CLAUSEN-THU (W.). The A. B. C. Universal Commercial Electric Telegraphic Code especially adapted for the use of Financiers, Merchants, Ship owners, Brokers, Agent, etc. Fourth edition 8vo, cloth.. 5 00

—— The A1 Universal Commercial Electric Telegraphic Code. Over 1,240 pp., and nearly 90,000 variations. 8vo, cloth.. 7 50

CLEEMANN (THOS. M.). The Railroad Engineer's Practice. Being a Short but Complete Description of the Duties of the Young Engineer in the Preliminary and Location Surveys and in Construction. Fourth edition. Revised and enlarged. Illustrated. 12mo, cloth 1 50

CLERK (DUGALD). Auto-cars or Horseless Vehicles. About 300 pp., 60 illustrations............(In Press.)

CLEVENGER (S. R.). A Treatise on the Method of Government Surveying as prescribed by the U. S. Congress and Commissioner of the General Land Office, with complete Mathematical, Astronomical and Practical Instructions for the use of the United States Surveyors in the field. 16mo, morocco......... 2 50

COFFIN (Prof. J. H. C.). Navigation and Nautical Astronomy. Prepared for the use of the U. S. Naval Academy. New Edition. Revised by Commander Charles Belknap. 52 woodcut illustrations. 12mo, cloth ....net. 3 50

COLE (R. S., M. A.). A Treatise on Photographic Optics. Being an account of the Principles of Optics, so far as they apply to Photography. 12mo, cloth, 103 illustrations and folding plates........... 2 50

COLLINS (JAS. E.). The private Book of Useful Alloys, and Memoranda for Goldsmiths, Jewelers, etc. 18mo, cloth 50

CORNWALL (Prof. H. B.). Manual of Blow-pipe Analysis, Qualitative and Quantitative. With a Complete System of Descriptive Mineralogy. 8vo, cloth. With many illustrations........................ 2 50

CRAIG (B. F.). Weights and Measures. An Account of the Decimal System, with Tables of Conversion for Commercial and Scientific Uses. Square 32mo, limp cloth.. 50

CROCKER (F. B.). Electric Lighting. A Practical Exposition of the Art, for use of Engineers, Students, and others interested in the Installation or Operation of Electrical Plants. Second edition. Revised. 8vo, cloth. Vol. 1. The Generating Plant 3 00
Vol. 2...... .... (In Press.)

CROCKER, (F. B.), and S. S. WHEELER. The Practical Management of Dynamos and Motors. Fourth edition (eighth thousand). Revised and enlarged. With a special chapter by H. A. Foster. 12mo, cloth. Illustrated.......... 1 00

CUMMING (LINNÆUS, M. A.). Electricity treated Experimentally. For the use of Schools and Students New edition. 12mo, cloth.......... 1 50

DAVIES (E. H.). Machinery for Metalliferous Mines. A Practical Treatise for Mining Engineers, Metallurgists and Manufacturers. With upwards of 300 illustrations. 8vo, cloth.......... 5 00

DAVIS (JOHN W., C. E.). Formulæ for the Calculation of Railroad Excavation and Embankment, and for finding Average Haul. Second edition. Octavo, half roan.......... 1 50

DAY (CHARLES). The Indicator and its Diagrams. With Chapters on Engine and Boiler Testing; Including a Table of Piston Constants compiled by W. H. Fowler. 12mo, cloth. 125 illustrations.......... 2 00

DERR (W. L.). Block Signal Operation. A Practical Manual. Oblong, cloth.......... 1 50

DIXON (D. B.). The Machinist's and Steam Engineer's Practical Calculator. A Compilation of Useful Rules and Problems arithmetically solved, together with General Information applicable to Shop-Tools, Mill-Gearing, Pulleys and Shafts, Steam-Boilers and Engines. Embracing valuable Tables and Instruction in Screw cutting, Valve and Link Motion, etc. 16mo, full morocco, pocket form.......... 1 25

DODD (GEO.). Dictionary of Manufactures, Mining, Machinery, and the Industrial Arts. 12mo, cloth ... 1 50

DORR (B. F.). The Surveyor's Guide and Pocket Table Book. 18mo, morocco flaps. Third edition... 2 00

DRAPER (C. H.). An Elementary Text Book of Light, Heat and Sound, with Numerous Examples. Fourth edition. 12mo, cloth. Illustrated.......... 1 00

[illegible] and the Principles of Thermo-Dynamics. [illegible] many Illustrations and numerical examples, [illegible] cloth.......... 1 50

DUBOIS (A. J.). The New Method of Graphic Statics. With 60 illustrations. 8vo, cloth...... ...	1 50
EDDY (Prof. H. T.). Researches in Graphical Statics. Embracing New Constructions in Graphical Statics, a New General Method in Graphical Statics, and the Theory of Internal Stress in Graphical Statics. 8vo, cloth........................ ..	1 50
—— Maximum Stresses under Concentrated Loads. Treated graphically. Illustrated. 8vo, cloth.......	1 50
EISSLER (M.). The Metallurgy of Gold; a Practical Treatise on the Metallurgical Treatment of Gold-Bearing Ores, including the Processes of Concentration and Chlorination, and the Assaying, Melting and Refining of Gold. Fourth Edition, revised and greatly enlarged. 187 illustrations. 12mo, cloth	5 00
——The Metallurgy of Silver; a Practical Treatise on the Amalgamation, Roasting and Lixivation of Silver Ores, including the Assaying, Melting and Refining of Silver Bullion. 124 illustrations. Second edition, enlarged, 12mo, cloth	4 00
——The Metallurgy of Argentiferous Lead; a Practical Treatise on the Smelting of Silver Lead Ores and the Refining of Lead Bullion. Including Reports on Various Smelting Establishments and Descriptions of Modern Smelting Furnaces and Plants in Europe and America. With 183 illustrations. 8vo, cloth	5 00
—— Cyanide Process for the Extraction of Gold and its Practical Application on the Witwatersrand Gold Fields in South Africa. Second edition. Enlarged. 8vo, cloth. Illustrations and folding plates........	3 00
—— A Hand-book on Modern Explosives, being a Practical Treatise on the Manufacture and use of Dynamite, Gun Cotton, Nitro-Glycerine and other Explosive Compounds, including the manufacture of Collodion-Cotton, with chapters on explosives in practical application. Second edition, enlarged with 150 illustrations. 12mo, cloth..........	5 00
ELIOT (C. W.), and STORER (F. H.). A compendious Manual of Qualitative Chemical Analysis. Revised with the co-operation of the authors, by Prof. William R. Nichols. Illustrated. Nineteenth edition, newly revised by Prof. W. B, Lindsay, 12mo. cloth................	1 25

ELLIOT (Maj. GEO. H.). European Light-House Systems. Being a Report of a Tour of Inspection made in 1873. 51 engravings and 21 woodcuts. 8vo, cloth 5 00

ELLISON, (LEWIS M.). Practical Application of the Indicator. With reference to the adjustment of Valve Gear on all styles of Engines. Second edition, revised. 8vo. cloth, 100 illustrations.......... 2 00

EVERETT (J. D.). Elementary Text-book of Physics. Illustrated. Seventh edition. 12mo, cloth 1 50

EWING (Prof. A. J.). The Magnetic Induction in Iron and other metals. 159 illustrations. 8vo, cloth 4 00

FANNING (J. T.). A Practical Treatise on Hydraulic and Water-Supply Engineering. Relating to the Hydrology, Hydro-dynamics, and Practical Construction of Water-Works in North America. 180 illustrations. 8vo, cloth. Fourteenth edition, revised, enlarged, and new tables and illustrations added. 650 pages.......... 5 00

FISH (J. C. L.). Lettering of Working Drawings. Thirteen plates, with descriptive text. Oblong, 9x12½, boards.......... 1 00

FISKE (Lieut. BRADLEY A., U. S. N.). Electricity in Theory and Practices or, The Elements of Electrical Engineering. Eighth edition. 8vo, cloth 2 50

FISHER (H. K. C. and DARBY, W. C.). Students' Guide to Submarine Cable Testing. 8vo, cloth...... 2 50

FISHER (W. C.). The Potentiometer and its Adjuncts. 8vo, cloth.......... 2 25

FLEISCHMANN (W.). The Book of the Dairy. A Manual of the Science and Practice of Dairy Work. Translated from the German, by C. M. Aikman and R. Patrick Wright. 8vo, cloth.......... 4 00

FLEMING (Prof. J. A.). The Alternate Current Transformer in Theory and Practice. Vol. 1—The Induction of Electric Currents; 611 pages. New edition. Illustrated. 8vo, cloth.......... 5 00
Vol. 2. The Utilization of Induced Currents. Illustrated. 8vo, cloth 5 00

—— [illegible] Lamps and Electric Lighting. Being a [illegible] lectures delivered at the Royal Insti- [illegible] May, 1894. 8vo, cloth, fully illustrated 3 00

FLEMING (Prof. J. A.). Electrical Laboratory Notes and Forms, Elementary and advanced. 4to, cloth, illustrated.. 5 00

FOLEY (NELSON), and THOS. PRAY, Jr. The Mechanical Engineers' Reference Book for Machine and Boiler Construction, in 2 parts. Part 1—General Engineering Data. Part 2—Boiler Construction. With fifty-one plates and numerous illustrations, specially drawn for this work. Folio, half mor ...25 00

FORNEY (MATTHIAS N.). Catechism of the Locomotive. Second edition, revised and enlarged. Forty-sixth thousand. 8vo, cloth.................... 3 50

FOSTER (Gen. J. G., U. S. A.). Submarine Blasting in Boston Harbor, Massachusetts. Removal of Tower and Corwin Rocks. Illustrated with 7 plates. 4to, cloth.. 3 50

FOSTER (H. A.). Electrical Engineers' Pocket Book. 1000 pages with the collaboration of Eminent Specialists .... (In press)

FOSTER (JAMES). Treatise on the Evaporation on Saccharine, Chemical and other Liquids by the Multiple System in Vacuum and Open Air. Second edition. Diagrams and large plates. 8vo, cloth.... 7 50

FOWLER. Mechanical Engineers' Pocket Book for 1900.. 1 00

FOX (WM.), and C. W. THOMAS, M. E. A Practical Course in Mechanical Drawing. 12mo, cloth with plates 1 25

FRANCIS (JAS. B., C. E.). Lowell Hydraulic Experiments. Being a selection from experiments on Hydraulic Motors, on the Flow of Water over Weirs, in open Canals of uniform rectangular section, and through submerged Orifices and diverging Tubes. Made at Lowell, Mass. Fourth edition, revised and enlarged, with many new experiments, and illustrated with 23 copper-plate engravings. 4to, cloth....................................15 00

FROST (GEO. H.). Engineer's Field Book. By C. S. Cross. To which are added seven chapters on Railroad Location and Construction. Fourth edition. 12mo, cloth 1 00

FULLER (GEORGE W.). Report on the Investigations into the Purification of the Ohio River Water at Louisville, Kentucky, made to the President and Directors of the Louisville Water Company. Published under agreement with the Directors. 4to, cloth. 3 full page plates......net 10 00

GEIPEL (WM.), and KILGOUR, (M. H.) A Pocketbook of Electrical Engineering Formula. Illustrated. 18mo, morocco...... 3 00

Large paper edition, wide margins, 8vo, morcco, gilt edges...... 5 00

GERBER (NICHOLAS). Chemical and Physical Analysis of Milk, Condensed Milk and Infant's Milk-Food. 8vo, cloth...... 1 25

GIBBS (WILLIAM F.). Lighting by Acetylene, Generators, Burners and Electric Furnaces. With 66 illustrations. Second edition revised. 12mo, cloth.. 1 50

GILLMORE (GEN. Q. A.). Treatise on Limes, Hydraulic Cements, and Mortars. Papers on Practical Engineering, United States Engineer Department, No. 9, containing Reports of numerous Experiments conducted in New York Cityduring the years of 1858 to 1861, inclusive. With numerous illustrations. 8vo cloth...... 4 00

—— Practical Treatise on the Construction of Roads, Streets, and Pavements, with 70 illustrations. 12mo, cloth...... 2 00

—— Report on Strength of Building Stones in the United States, etc. 8vo, illustrated cloth...... 1 00

GOLDING (HENRY A.). The Theta-Phi Diagram. Practically applied to Steam, Gas, Oil and Air Engines. 12mo, cloth. Illustrated. ......net 1 25

GOODEVE (T. M.). A Text-Book on the Steam Engine. With a Supplement on Gas-Engines. Twelfth Edition, enlarged. 143 illustrations. 12mo, cloth... 2 00

GORDON (J. E. H.). School Electricity. Illustrations. 12mo, cloth...... 2 00

GORE (G., F. R. S.). The Art of Electrolytic Separation of Metals, etc. (Theoretical and Practical.) Illustrated. 8vo, cloth...... 3 50

—— E[illegible] Chemistry Inorganic. Third Edition. 8vo, [illegible]...... 80

GOULD (E. SHERMAN). The Arithmetic of the Steam Engine. 8vo, cloth ... 1 00

GRIFFITHS (A. D., Ph. D.). A Treatise on Manures, or the Philosophy of Manuring. A Practical Hand-Book for the Agriculturist, Manufacturer and Student. 12mo, cloth ... 3 00

GROVER (FREDERICK). Practical Treatise on Modern Gas and Oil Engines. 8vo, cloth. Illustrated 2 00

GURDEN (RICHARD LLOYD). Traverse Tables: computed to 4 places Decimals for every ° of angle up to 100 of Distance. For the use of Surveyors and Engineers. New Edition. Folio, half morocco. .. 7 50

GUY ARTHUR (F.). Electric Light and Power, giving the Result of Practical Experience in Central Station Work. 8vo, cloth. Illustrated ... 2 50

HAEDER (HERMAN C. E.). A Hand-book on the Steam Engine. With especial reference to small and medium sized engines. English edition re-edited by the author from the second German edition, and translated with considerable additions and alterations by H. H. P. Powels. 12mo, cloth. Nearly 1100 illustrations ... 3 00

HALL (WM. S. Prof.). Elements of the Differential and Integral Calculus. Second edition. 8vo, cloth. Illustrated ... net 2 25

HALSEY (F. A.). Slide Valve Gears; an Explanation of the action and Construction of Plain and Cut-off Slide Valves. Illustrated. 12mo, cloth. Sixth edition ... 1 50

—— The Use of the Slide Rule. Illustrated with diagrams and folding plates. 16mo, boards ... 50

HAMILTON (W. G.). Useful Information for Railway Men. Tenth Edition, revised and enlarged. 562 pages, pocket form. Morocco, gilt ... 2 00

HANCOCK (HERBERT). Text Book of Mechanics and Hydrostatics, with over 500 diagrams. 8vo, cloth ... 1 75

HARRISON (W. B.). The Mechanics' Tool Book. With Practical Rules and Suggestions for use of Machinists, Iron-Workers, and others. Illustrated with 44 engravings. 12mo, cloth ... 1 50

HASKINS (C. H.). The Galvanometer and its Uses. A Manual for Electricians and Students. Fourth edition. 12mo, cloth 1 50

HAWKE (WILLIAM H.). The Premier Cipher Telegraphic Code Containing 100,000 Words and Phrases. The most complete and most useful general code yet published. 4to, cloth 5 00

—— 100,000 Words; Supplement to the Premier Code. All the words are selected from the official vocabulary. Oblong quarto, cloth 4 20

HAWKINS (C. C.) and WALLIS (F.). The Dynamo; its Theory, Design and Manufacture. 190 Illustrations, 12mo, cloth 3 00

HAY (ALFRED). Principles of Alternate-Current Working. 12mo, cloth, illustrated 2 00

HEAP (Major D. P., U. S. A.). Electrical Appliances of the Present Day. Report of the Paris Electrical Exposition of 1881. 250 illustrations. 8vo, cloth..... 2 00

HEAVISIDE (OLIVER). Electromagnetic Theory. 8vo, cloth, two volumes each.................... 5 00

HENRICI (OLAUS). Skeleton Structures. Applied to the Building of Steel and Iron Bridges. Illustrated 1 50

HERRMANN (GUSTAV). The Graphical Statics of Mechanism. A Guide for the Use of Machinists, Architects, and Engineers; and also a Text-book for Technical Schools. Translated and annotated by A. P. Smith, M. E. 12mo, cloth, 7 folding plates. Third Edition.................... 2 00

HERMANN (FELIX). Painting on Glass and Porcelain and Enamel Painting. On the Basis of Personal Practical Experience of the Condition of the Art up to date. Translated by Charles Salter. Second greatly enlarged edition. 8vo, cloth, Illustrations, net.................... 3 50

HEWSON (WM.). Principles and Practice of Embanking Lands from River Floods, as applied to the Levees of the Mississippi. 8vo, cloth.................... 2 00

HILL (JOHN W.). The Purification of Public Water Supplies. Illustrated with valuable Tables, Diagrams and Cuts. 8vo, cloth, 304 pages.................... 3 00

—— The Interpretation of Water Analyses..(In Press)

HOBBS (W. R. P.). The Arithmetic of Electrical Measurements with numerous examples. Fully Worked, 12mo, cloth .... .50

HOFF (WM. B., Com. U. S. Navy.). The Avoidance of Collisions at Sea. 18mo, morocco .... .75

HOLLEY (ALEXANDER L.). Railway Practice. American and European Railway practice in the Economical Generation of Steam. 77 lithographed plates. Folio, cloth 12 00

HOLMES (A. BROMLEY). The Electric Light Popularly Explained. Fifth Edition. Illustrated. 12mo, paper .... .40

HOPKINS (NEVIL M.). Model Engines and small Boats. New Methods of Engine and Boiler Making with a chapter on Elementary Ship Design and Construction. 12mo, cloth 1 25

HOSPITALIER (E.). Polyphased Alternating Currents. Illustrated. 8vo, cloth. 1 40

HOWARD (C. R.). Earthwork Mensuration on the Basis of the Prismoidal Formulae. Containing Simple and Labor-saving Methods of obtaining Prismoidal Contents directly from End Areas. Illustrated by Examples and accompained by Plain Rules for Practical Uses. Illustrated. 8vo, cloth... ..... 1 50

HUMBER (WILLIAM, C. E.). A Handy Book for the Calculation of Strains in Girders and Similar Structures, and their Strength; Consisting of Formulae and Corresponding Diagrams, with numerous details for practical application, etc. Fourth Edition. 12mo, cloth 2 50

HURST (GEORGE H.). Colour; A Hand-book of the Theory of Colour. Containing ten coloured plates and 72 diagrams. 8vo, cloth. Illustrated. Price.... 2 50

—— Lubricating Oils, Fats and Greases. Their Origin, Preparation, Properties, Uses and Analysis. 313 pages, with 65 illustrations. 8vo, cloth............. 3 00

—— Soaps; A Practical Manual of the Manufacture of Domestic, Toilet and other Soaps. Illustrated with 66 Engravings. 8vo, cloth 5 00

HUTCHINSON (W. B.). Patents and How to Make Mo ey out of Them. Member of New York Bar. 12mo, cloth. New York, 1899 .... 1 25

HUTTON (W. S.). Steam Boiler Construction. A Practical Hand-book for Engineers, Boiler Makers and Steam Users. Containing a large collection of rules and data relating to recent practice in the design, construction, and working of all kinds of stationary, locomotive and marine steam boilers. With upwards of 500 illustrations. Third edition. Carefully revised and much enlarged. 8vo, cloth... 6 00

—— Practica Engineer's Hand-book, Comprising a treatise on Modern Engines and Boilers, Marine, Locomotive and Stationary. Fourth edition. Carefully revised with additions. With upwards of 570 illustrations. 8vo, cloth.............................. 7 00

—— The Works' Manager's Hand-book of Modern Rules, Tables, and Data for Civil and Mechanical Engineers. Millwrights and Boiler Makers, etc., etc. With upwards of 150 illustrations. Fifth edition. Carefully revised, with additions. 8vo, cloth....... 6 00

INNES (CHARLES H.). Problems in Machine Design. For the Use of Students, Draughtsmen and others. 12mo, cloth.. 1 50

—— Centrifugal Pumps, Turbines and Water Motors. Including the Theory and Practice of Hydraulics 12mo, cloth.. 1 50

ISHERWOOD (B. F.). Engineering Precedents for Steam Machinery. Arranged in the most practical and useful manner for Engineers. With illustrations. 2 vols. in 1. 8vo, cloth....................... 2 50

JAMESON (CHARLES D.). Portland Cement. Its Manufacture and Use. 8vo, cloth.................... 1 50

JAMIESON (ANDREW C. E.). A Text-Book on Steam and Steam Engines. Specially arranged for the use of Science and Art, City and Guilds of London Institute, and other Engineering Students. Tenth edition. Illustrated. 12mo, cloth.................... 3 00

—— Elementary Manual on Steam and the Steam Engine. Specially arranged for the use of First- [illegible] nce and Art, City and Guilds of London [illegible] and other Elementary Engineering [illegible] Third edition. 12mo, cloth 1 40

JANNETTAZ (EDWARD). A Guide to the Determination of Rocks: being an Introduction to Lithology. Translated from the French by G W. Plympton, Professor of Physical Science at Brooklyn Polytechnic Institute. 12mo, cloth............ 1 50

JOHNSTON, Prof. J. F. W., and CAMERON, Sir CHAS. Elements of Agricultural Chemistry and Geology. Seventeenth edition. 12mo, cloth........ 2 60

JOYNSON (F. H.). The Metals used in Construction. Iron, Steel, Bessemer Metal, etc. Illustrated. 12mo, cloth............ 75

—— Designing and Construction of Machine Gearing. Illustrated. 8vo, cloth............ 2 00

KANSAS CITY BRIDGE (THE.) With an Account of the Regimen of the Missouri River and a Description of the Methods used for Founding in that River. By O. Chanute, Chief Engineer, and George Morrison, Assistant Engineer. Illustrated with 5 lithographic views and 12 plates of plans. 4to, cloth... 6 00

KAPP (GISBERT C. E.). Electric Transmission of Energy and its Transformation, Subdivision, and Distribution. A Practical Hand-book. Fourth edition, revised. 12mo, cloth............ 3 50

—— Dynamos, Alternators and Transformers. 138 Illustrations. 12mo, cloth............ 4 00

KEMPE (H. R.). The Electrical Engineer's Pocket-Book of Modern Rules, Formulæ, Tables and Data. Illustrated. 32mo, mor. gilt............ 1 75

KENNELLY (A. E.). Theoretical Elements of Electro Dynamic Machinery. 8vo, cloth............ 1 50

KILGOUR, M. H., SWAN, H., and BIGGS, C. H. W. Electrical Distribution; its Theory and Practice. 174 Illustrations. 12mo, cloth............ 4 00

KING (W. H.). Lessons and Practical Notes on Steam. The Steam Engine, Propellers, etc., for Young Marine Engineers, Students, and others. Revised by Chief Engineer J. W. King, United States Navy. Nineteenth edition, enlarged. 8vo, cloth ... 2 00

KINGDON (J. A.). Applied Magnetism. An introduction to the Design of Electromagnetic Apparatus. 8vo, cloth............ 3 00

KIRKALDY (WM. G.). Illustrations of David Kirkaldy's System of Mechanical Testing, as Originated and Carried On by him during a Quarter of a Century. Comprising a Large Selection of Tabulated Results, showing the Strength and other Properties of Materials used in Construction, with explanatory Text and Historical Sketch. Numerous engravings and 25 lithographed plates. 4to, cloth.................... 20 00

KIRKWOOD (JAS. P.). Report on the Filtration of River Waters for the supply of Cities, as practised in Europe, made to the Board of Water Commissioners of the City of St. Louis. Illustrated by 30 double-plate engravings. 4to, cloth.......................... 7 50

LARRABEE (C. S.). Cipher and Secret Letter and Telegraphic Code, with Hog's Improvements. The most perfect Secret Code ever invented or discovered. Impossible to read without the key. 18mo, cloth 60

LAZELLE (H. M.). One Law in Nature. A New Corpuscular Theory comprehending Unity of Force, Identity of Matter, and its Multiple Atom Constitution, etc. 12mo, cloth.................................. 1 50

LEASK (A. RITCHIE). Breakdowns at Sea and How to Repair Them. With eighty-nine Illustrations. 8vo, cloth. Second edition..................... 2 00

—— Triple and Quadruple Expansion Engines and Boilers and their Management. With fifty-nine illustrations. Third edition, revised. 12mo, cloth.. 2 00

—— Refrigerating Machinery: Its Principles and Management. With sixty-four illustrations. 12mo, cloth 2 00

LECKY (S. T. S.). "Wrinkles" in Practical Navigation. With 130 illustrations. 8vo, cloth. Ninth edition, revised.. 8 40

LEVY (C. L.). Electric Light Primer. A Simple and Comprehensive Digest of all of the most important facts connected with the running of the dynamo, and electric lights, with precautions for safety. For the [illegible] persons whose duty it is to look after the [illegible], paper.. 50

LIVACHE (ACH., Ingenieur Civil Des Mines). The Manufacture of Varnishes, Oil Crushing, Refining and Boiling and Kindred Industries. Translated from the French and greatly extended. by John Geddes McIntosh. 8vo, cloth. Illustrated.......net 5 00

LOCKE (ALFRED G., and CHARLES G.) A Practical Treatise on the Manufacture of Sulphuric Acid. With 77 Constructive Plates drawn to scale Measurements, and other Illustrations. Royal 8vo, cloth. 10 00

LOCKERT (LOUIS). Petroleum Motor-Cars. 12mo, cloth........................ 1 50

LOCKWOOD (THOS. D.). Electricity, Magnetism, and Electro-Telegraphy. A Practical Guide for Students, Operators, and Inspectors. 8vo, cloth. Third edition........................ 2 50

—— Electrical Measurement and the Galvanometer; its Construction and Uses. Second edition. 32 illustrations. 12mo, cloth........................ 1 50

LODGE (OLIVER J.). Elementary Mechanics, including Hydrostatics and Pneumatics. Revised edition. 12mo, cloth........................ 1 50

LORING (A. E.). A Hand-book of the Electro-Magnetic Telegraph. Paper boards........................ 50
Cloth........................ 75
Morocco........................ 1 00

LUCE (Com. S. B.). Text-Book of Seamanship. The Equipping and Handling of Vessels under Sail or Steam. For the use of the U. S. Naval Academy. Revised and enlarged edition, by Lt. Wm. S. Benson. 8vo, cloth........................ 10 00

LUNGE (GEO.). A Theoretical and Practical Treatise on the Manufacture of Sulphuric Acid and Alkali with the Collateral Branches. Vol. I. Sulphuric Acid, Second edition, revised and enlarged. 342 illustrations. 8vo, cloth........................ 15 00
Vol. II. Second edition, revised and enlarged. 8vo, cloth........................ 16 80
Vol III. 8vo, cloth. New edition, 1896........................ 15 00

LUNGE. (GEO.), and HURTER, F. The Alkali Maker's Pocket-Book. Tables and Analytical Methods for Manufacturers of Sulphuric Acid, Nitric Acid, Soda, Potash and Ammonia. Second edition. 12mo, cloth........................ 3 00

MOELLER (F. C. G.). Krupp's Steel Works. With 88 illustrations. By Felix Schmidt and Montan. Authorized Translation from the German. 4to, cloth.................................. .....(In Press.)

MULLIN (JOSEPH P., M. E.). Modern Moulding and Pattern-Making. A Practical Treatise upon Pattern Shop and Foundry Work; embracing the Moulding of Pulleys, Spur Gears, Worm Gears, Balance-Wheels, Stationary Engine and Locomotive Cylinders, Globe Valves, Tool Work, Mining Machinery, Screw Propellers, Pattern-Shop Machinery, and the latest improvements in English and American Cupolas; together with a large collection of original and carefully selected Rules and Tables for every-day use in the Drawing Office, Pattern-Shop and Foundry. 12mo, cloth. Illustrated................. 2 50

MUNRO (JOHN C. E.), and JAMIESON ANDREW C. E. A Pocket-book of Electrical Rules and Tables for the use of Electricians and Engineers. Thirteenth edition, revised and enlarged. With numerous diagrams. Pocket size. Leather.. 2 50

MURPHY (J. G., M. E.). Practical Mining. A Field Manual for Mining Engineers. With Hints for Investors in Mining Properties. 16mo, morocco tucks.. 1 00

NAQUET (A.). Legal Chemistry. A Guide to the Detection of Poisons, Falsification of Writings, Adulteration of Alimentary and Pharmaceutical Substances, Analysis of Ashes, and examination of Hair, Coins, Arms, and Stains, as applied to Chemical Jurisprudence. Translated from the French, by J. P. Battershall, Ph. D., with a preface by C. F. Chandler, Ph. D., M. D., LL. D. 12mo, cloth........ 2 00

NASMITH (JOSEPH). The Student's Cotton Spinning. Third edition, revised and enlarged. 8vo, cloth. 622 pages. 250 Illustrations................. 3 00

NEWALL (JOHN W.). Plain Practical Directions for Drawing, Sizing and Cutting Bevel-Gears, showing how the Teeth may be cut in a Plain Milling Machine or Gear Cutter so as to give them a correct shape from end to end; and showing how to get out all particulars for the Workshop without making any Drawings. Including a Full Set of Tables of Reference. Folding plates. 8vo, cloth. 1 50

NEWCOMB (EDWARD W.). Stepping Stones to Photography. 12mo, cloth. Illustrated. N. Y.. 1899. (In Press.)

NEWLANDS (JAMES). The Carpenters' and Joiners' Assistant: being a Comprehensive Treatise on the Selection, Preparation and Strength of Materials, and the Mechanical Principles of Framing. Illustrated. Folio, half morocco....................15 00

NIPHER (FRANCIS E., A. M.). Theory of Magnetic Measurements, with an appendix on the Method of Least Squares. 12mo, cloth 1 00

NOAD (HENRY M.). The Students' Text-Book of Electricity. A new edition, carefully revised. With an Introduction and additional chapters by W. H. Preece. With 471 illustrations. 12mo, cloth........ 4 00

NUGENT (E.). Treatise on Optics; or, Light and Sight theoretically and practically treated. with the application to Fine Art and Industrial Pursuits. With 103 illustrations. 12mo, cloth. 1 50

O'CONNOR (HENRY). The Gas Engineer's Pocket-Book. Comprising Tables, Notes and Memoranda; relating to the Manufacture, Distribution and Use of Coal Gas and the Construction of Gas Works. 12mo, full leather, gilt edges.... .... 3 50

OUDIN (M. A.). Standard Polyphase Apparatus and Systems. Fully illustrated........ .... 3 00

PAGE (DAVID). The Earth's Crust, A Handy Outline of Geology. 16mo, cloth........... 75

PALAZ (A., ScD.). A Treatise on Industrial Photometry, with special application to Electric Lighting. Authorized translation from the French, by George W. Patterson, Jr. Second edition, revised. 8vo, cloth. Illustrated........ .... 4 00

PARSHALL (H. F.), and HOBART H. M. Armature Windings of Electric Machines. With 140 full page plates, 65 tables, and 165 pages of descriptive letter-press. 4to, cloth...................... . 7 50

PARSHALL (H. F.), and EVAN PARRY. Electrical Equipment of Tramways......(In Press.)

PEIRCE (B.). System of Analytic Mechanics. 4to, cloth 10 00

—— Linear Associative Algebra. New edition, with addenda and notes, by C. L. Pierce. 4to, cloth 4 00

PERRINE (F. A. C., A. M., D. Sc.). Conductors for Electrical Distribution; their Manufacture and Materials, the Calculation of Circuits, Pole Line Construction, Underground Working and other Uses. (In Press.)

PERRY (JOHN). Applied Mechanics. A Treatise for the use of students who have time to work experimental, numerical and graphical exercises illustrating the subject. 8vo, cloth. 650 pages., net 2 50

PHILLIPS (JOSHUA). Engineering Chemistry. A Practical Treatise for the use of Analytical Chemists, Engineers, Iron Masters, Iron Founders, students and others. Comprising methods of Analysis and Valuation of the principal materials used in Engineering works, with numerous Analyses, Examples and Suggestions. 314 illustrations. Second edition, revised and enlarged. 8vo, cloth........... 4 00

PICKWORTH (CHAS. N.). The Indicator Handbook. A Practical Manual for Engineers. Part I. The Indicator: Its Construction and Application. 81 illustrations. 12mo, cloth 1 50

—— The Slide Rule. A Practical Manual of Instruction for all Users of the Modern Type of Slide Rule, exhibiting the Application of the Instrument to the Everyday Work of the Engineer,—Civil, Mechanical and Electrical. 12mo, flexible cloth. Fifth edition. 80

PLANE TABLE (THE). Its Uses in Topographical Surveying. From the Papers of the United States Coast Survey. Illustrated. 8vo, cloth.............. 2 00

PLANTE (GASTON). The Storage of Electrical Energy, and Researches in the Effects created by Currents, combining Quantity with High Tension. Translated from the French by Paul B. Elwell. 89 illustrations. 8vo.................................... 4 00

PLATTNER. Manual of Qualitative and Quantitative Analysis with the Blow-Pipe. From the last German edition, revised and enlarged, by Prof. Th. Richter, of the Royal Saxon Mining Academy. Translated
f. H. B. Cornwall, assisted by John H. Cas-
trated with 87 wood cuts and one litho-
late. Seventh edition, revised. 560 pages.
.... 5 00

PLYMPTON (Prof. GEO. W.). The Blow Pipe. A Guide to its use in the Determination of Salts and Minerals. Compiled from various sources. 12mo, cloth 1 50

—— The Aneroid Barometer: its Construction and Use. Compiled from several sources. Fourth edition. 16mo, boards. Illustrated.......... 50
Morocco.......... 1 00

POCKET LOGARITHMS, to Four Places of Decimals, including Logarithms of Numbers, and Logarithmic Sines and Tangents to Single Minutes. To which is added a Table of Natural Sines, Tangents, and Co-Tangents. 16mo, boards.......... 50

POPE (F. L.). Modern Practice of the Electric Telegraph. A Technical Hand-book for Electricians, Managers and Operators. Fifteenth edition, rewritten and enlarged, and fully illustrated. 8vo, cloth. 1 50

POPPLEWELL (W. C.). Elementary Treatise on Heat and Heat Engines. Specially adapted for engineers and students of engineering. 12mo, cloth. Illustrated.......... 3 00

POWLES (H. H.). Steam Boilers..........(In Press.)

PRAY (Jr., THOMAS). Twenty Years with the Indicator; being a Practical Text-Book for the Engineer or the Student, with no complex Formulæ. Illustrated. 8vo, cloth.......... 2 50

—— Steam Tables and Engine Constant. Compiled from Regnault, Rankine and Dixon directly, making use of the exact records. 8vo, cloth.......... 2 00

PRACTICAL IRON FOUNDING. By the Author of "Pattern Making," &c., &c. Illustrated with over one hundred engravings. 12mo, cloth.......... 1 50

PREECE (W. H.). Electric Lamps ....(In Press.)

PREECE (W. H.), and STUBBS, A. T. Manual of Telephony. Illustrations and plates. 12mo, cloth. 4 50

PREMIER CODE. (See Hawk, Wm. H.)

PRESCOTT (Prof. A. B.). Organic Analysis. A Manual of the Descriptive and Analytical Chemistry of certain Carbon Compounds in Common Use; a Guide in the Qualitative and Quantitative Analysis of Organic Materials in Commercial and Pharmaceutical Assays, in the estimation of Impurities under Authorized Standards, and in Forensic Examinations for Poisons, with Directions for Elementary Organic Analysis. Fourth edition. 8vo, cloth..... 5 00

PRESCOTT (Prof. A. B.). Outlines of Proximate Organic Analysis, for the Identification, Separation, and Quantitative Determination of the more commonly occurring Organic Compounds. Fourth edition. 12mo, cloth 1 75

—— First Book in Qualitative Chemistry. Eighth edition. 12mo, cloth 1 50

—— and Otis Coe Johnson. Qualitative Chemical Analysis. A Guide in the Practical Study of Chemistry and in the work of Analysis. Fourth fully revised edition. With Descriptive Chemistry extended throughout.................................. 3 50

PRITCHARD (O. G.). The Manufacture of Electric Light Carbons. Illustrated. 8vo, paper 60

PULLEN (W. W. F.). Application of Graphic Methods to the Design of Structures. Specially prepared for the use of Engineers. 12mo, cloth. Illustrated. net 2 50

PULSIFER (W. H.). Notes for a History of Lead. 8vo, cloth, gilt tops.............................. 4 00

PYNCHON (Prof. T. R.). Introduction to Chemical Physics, designed for the use of Academies, Colleges, and High Schools. Illustrated with numerous engravings, and containing copious experiments with directions for preparing them. New edition, revised and enlarged, and illustrated by 269 illustrations on wood. 8vo, cloth.............................. 3 00

RADFORD (Lieut. CYRUS S.). Hand-book on Naval Gunnery. Prepared by Authority of the Navy Department. For the use of U. S. Navy, U. S. Marine Corps and U. S. Naval Reserves. Revised and enlarged, with the assistance of Stokely Morgan, Lieut. U. S. N. Third edition. 12mo, flexible leather. 2 00

RAFTER (GEO. W.), and M. N. BAKER. Sewage Disposal in the United States. Illustrations and folding plates. Second edition. 8vo, cloth........ 6 00

[illegible] (GILBERT S.). The Incandescent Lamp and its Manufacture. 8vo, cloth.............................. 3 00

RANDALL (J. E.). A Practical Treatise on the Incandescent Lamp. Illustrated. 16mo, cloth..... 50

RANDALL (P. M.). Quartz Operator's Hand-book. New edition, revised and enlarged, fully illustrated. 12mo, cloth.......... .... 2 00

RANKINE (W. J. MACQUORN.) Applied Mechanics. Comprising the Principles of Statics and Cinematics, and Theory of Structures. Mechanism, and Machines. With numerous diagrams. Fifteenth edition. Thoroughly revised by W. J. Millar. 8vo, cloth 5 00

—— Civil Engineering. Comprising Engineering Surveys, Earthwork, Foundations, Masonry, Carpentry, Metal Work, Roads, Railways, Canals, Rivers, Water Works, Harbors, etc. With numerous tables and illustrations. Twentieth edition. Thoroughly revised by W. J. Millar. 8vo, cloth. 6 50

—— Machinery and Millwork. Comprising the Geometry, Motions, Work, Strength, Construction, and Objects of Machines, etc. Illustrated with nearly 300 wood cuts. Seventh edition. Thoroughly revised by W. J. Millar. 8vo, cloth........................... 5 00

—— The Steam Engine and other Prime Movers. With diagram of the Mechanical Properties of Steam-folding plates, numerous tables and illustrations. Thirteenth edition. Thoroughly revised by W. J. Millar. 8vo, cloth 5 00

—— Useful Rules and Tables for Engineers and Others. With appendix, tables, tests, and formulæ for the use of Electrical Engineers. Comprising Submarine Electrical Engineering, Electric Lighting, and Transmission of Power. By Andrew Jamieson, C. E., F. R. S. E. Seventh edition. Thoroughly revised by W. J. Millar. Crown 8vo, cloth. 4 00

—— A Mechanical Text-Book. By Prof. Macquorn Rankine and E. F. Bamber, C. E. With numerous illustrations. Fourth edition. 8vo, cloth........... 3 50

RAPHAEL (F. C.). Localisation of Faults in Electric Light Mains, 8vo, cloth............ .. 2 00

RECKENZAUN (A.). Electric Traction on Railways and Tramways. 213 illustrations. 12mo, cloth. ... 4 00

REED'S ENGINEERS' HAND-BOOK to the Local Marine Board Examinations for Certificates of Competency as First and Second Class Engineers. By W. H. Thorn. With the answers to the Elementary Questions. Illustrated by 297 diagrams and 36 large plates. Sixteenth edition, revised and enlarged. 8vo, cloth.................................. 5 00

—— Key to the Sixteenth Edition of Reed's Engineer's Hand-book to the Board of Trade Examinations for First and Second Class Engineers and containing the working of all the questions given in the examination papers By W. H Thorn. 8vo, cloth 3 00

—— Useful Hints to Sea-going Engineers, and How to Repair and Avoid "Break Downs;" also Appendices Containing Boiler Explosions, Useful Formulæ, etc. With 36 diagrams and 4 plates. Second edition, revised and enlarged. 12mo, cloth....... .... 1 40

—— Marine Boilers: A Treatise on the Causes and Prevention of their Priming, with Remarks on their General Management. Illustrated. 12mo, cloth... 2 00

REINHARDT (CHAS. W.). Lettering for Draftsmen, Engineers and Students. A Practical System of Free-hand Lettering for Working Drawings. Fourth thousand. Oblong, boards.................. 1 00

RICE (J. M.), and JOHNSON, W. W. On a New Method of obtaining the Differential of Functions, with especial reference to the Newtonian Conception of Rates or Velocities. 12mo, paper.... 50

RINGWALT (J. L.). Development of Transportation Systems in the United States, Comprising a Comprehensive Description of the leading features of advancement from the colonial era to the present time. With illustrations. Quarto, half morocco.. 7 50

RIPPER (WILLIAM). A Course of Instruction in Machine Drawing and Design for Technical Schools and Engineer Students. With 52 plates and numerous explanatory engravings. Folio, cloth......... . 6 00

ROEBLING (J. A.). Long and Short Span Railway
Illustrated with large copperplate
of plans and views. Imperial folio,
..................................25 00

ROGERS (Prof. H. D.). The Geology of Pennsylvania. A Government Survey, with a General View of the Geology of the United States, essays on the Coal Formation and its Fossils, and a description of the Coal Fields of North America and Great Britain. Illustrated with plates and engravings in the text. 3 vols., 4to, cloth, with portfolio of maps. 15 00

ROSE (JOSHUA, M. E.). The Pattern Makers' Assistant. Embracing Lathe Work, Branch Work, Core Work, Sweep Work, and Practical Gear Constructions, the Preparation and Use of Tools, together with a large collection of useful and valuable Tables. Eighteenth edition. Illustrated with 250 engravings. 8vo, cloth.......................... 2 50

—— Key to Engines and Engine-running. A Practical Treatise upon the Management of Steam Engines and Boilers for the Use of Those who Desire to Pass an Examination to Take Charge of an Engine or Boiler. With numerous illustrations, and Instructions Upon Engineers' Calculations, Indicators, Diagrams, Engine Adjustments, and other Valuable Information necessary for Engineers and Firemen. 12mo, cloth.................................. 2 50

SABINE (ROBERT). History and Progress of the Electric Telegraph. With descriptions of some of the apparatus. Second edition, with additions. 12mo, cloth.................................. 1 25

SAELTZER (ALEX.). Treatise on Acoustics in connection with Ventilation. 12mo, cloth.......... 1 00

SALOMONS (Sir DAVID, M. A.). Electric Light Installations. A Practical Hand-book. Eighth edition, revised and enlarged, with numerous illustrations. Vol. I. The management of Accumulators. 12mo, cloth.................. 1 50
Vol. II., Apparatus, 296 illustrations. 12mo, cloth 2 25
Vol. III., Applications. 12mo, cloth.............. 1 50

SANFORD (P. GERALD). Nitro-Explosives. A Practical Treatise concerning the Properties, Manufacture and Analysis of Nitrated Substances, including the Fulminates, Smokeless Powders and Celluloid. 8vo, cloth, 270 pages...................... 3 00

SAUNNIER (CLAUDIUS). Watchmaker's Handbook. A Workshop Companion for those engaged in Watchmaking and allied Mechanical Arts. Translated by J. Tripplin and E Rigg. Second edition, revised with appendix. 12mo, cloth 3 50

SCHELLEN (Dr. H.). Magneto-Electric and Dynamo-Electric Machines: their Construction and Practical Application to Electric Lighting, and the Transmission of Power. Translated from the third German edition, by N. S. Keith and Percy Neymann, Ph. D. With very large additions and notes relating to American Machines, by N. S. Keith. Vol. I., with 353 illustrations. Second edition 5 00

SCHUMANN (F.). A Manual of Heating and Ventilation in its Practical Application, for the use of Engineers and Architects. Embracing a series of Tables and Formulæ for dimensions of heating, flow and return pipes for steam and hot water boilers, flues, etc. 12mo, illustrated, full roan. 1 50

SCRIBNER (J. M.). Engineers' and Mechanics' Companion. Comprising United States Weights and Measures. Mensuration of Superfices and Solids, Tables of Squares and Cubes, Square and Cube Roots, Circumference and Areas of Circles, the Mechanical Powers, Centres of Gravity, Gravitation of Bodies, Pendulums, Specific Gravity of Bodies, Strength, Weight, and Crush of Materials, Water-Wheels, Hydrostatics, Hydraulics, Statics, Centres of Percussion and Gyration, Friction Heat, Tables of the Weight of Metals, Scantling, etc., Steam and the Steam Engine. Twentieth edition revised. 16mo, full morocco 1 50

SEATON (A. E.). A Manual of Marine Engineering. Comprising the Designing, Construction and Working of Marine Machinery. With numerous tables and illustrations reduced from Working Drawings. Fourteenth edition. Revised throughout, with an additional chapter on Water Tube Boilers. 8vo., cloth 6 00

—— **and ROUNTHWAITE (H. M.).** A Pocket-book of Marine Engineering Rules and Tables. For the use of Marine Engineers and Naval Architects, Designers, Draughtsmen, Superintendents, and all engaged in the design and construction of Marine Machinery, Naval and Mercantile. Fifth edition, revised and enlarged. Pocket size. Leather, with tuck. Reprinting.

SEXTON (A. HUMBOLDT). Fuel and Refractory Materials. 8vo, cloth 2 00

SHIELDS (J. E.). Notes on Engineering Construction Embracing Discussions of the Principles involved, and Descriptions of the Material employed in Tunnelling, Bridging, Canal and Road Building, etc. 12mo, cloth 1 50

SHOCK (WM. H.). Steam Boilers: Their Design, Construction and Management. 4to, half morocco. 15 00

SHREVE (S. H.). A Treatise on the Strength of Bridges and Roofs. Comprising the determination of Algebraic formulas for strains in Horizontal, Inclined or Rafter, Triangular, Bowstring, Lenticular, and other Trusses, from fixed and moving loads, with practical applications and examples, for the use of Students and Engineers. 87 woodcut illus. Fourth edition. 8vo, cloth 3 50

SHUNK (W. F.). The Field Engineer. A Handy Book of practice in the Survey, Location, and Truckwork of Railroads, containing a large collection of Rules and Tables, original and selected, applicable to both the Standard and Narrow Gauge, and prepared with special reference to the wants of the young Engineer. Eleventh edition, revised and enlarged. 12mo, morocco, tucks 2 50

SIMMS (F. W.). A Treatise on the Principles and Practice of Levelling. Showing its application to purposes of Railway Engineering, and the Construction of Roads, etc. Revised and corrected, with the addition of Mr. Laws' Practical Examples for setting out Railway Curves. Illustrated. 8vo, cloth 2 50

SIMMS (W. F.). Practical Tunnelling. Fourth edition, revised and greatly extended. With additional chapters illustrating recent practice by D. Kinnear Clark. With 36 plates and other illustrations. Imperial 8vo, cloth 12 00

SLATER (J. W.). Sewage Treatment, Purification, and Utilization. A Practical Manual for the Use of Corporations, Local Boards, Medical Officers of Health, Inspectors of Nuisances, Chemists, Manufacturers, Riparian Owners, Engineers, and Ratepayers. 12mo, cloth 2 25

SMITH (ISAAC W., C. E.). The Theory of Deflections and of Latitudes and Departures. With special applications to Curvilinear Surveys, for Alignments of Railway Tracks. Illustrated. 16mo, morocco, tucks.. 3 00

SNELL (ALBION T.). Electric Motive Power: The Transmission and Distribution of Electric Power by Continuous and Alternate Currents With a Section on the Applications of Electricity to Mining Work. Second edition. 8vo, cloth, illustrated.............. 4 00

SPEYERS (CLARENCE L.). Text-Book of Physical Chemistry. 8vo, cloth.......................... 2 25

STAHL (A. W.), and A. T. WOODS. Elementary Mechanism. A Text-Book for Students of Mechanical Engineering. Fourth edition, enlarged. 12mo, cloth.. 2 00

STALEY (CADY), and PIERSON, GEO. S. The Separate System of Sewerage: its Theory and Construction. Third edition, revised. 8vo, cloth. With maps, plates and illustrations........................ 3 00

STEVENSON (DAVID, F.R.S.N.). The Principles and Practice of Canal and River Engineering. Revised by his sons David Alan Stevenson, B. Sc., F. R. S.E., and Charles Alexander Stevenson, B. Sc., F.R. S.E., Civil Engineer. Third edition, with 17 plates, 8vo, cloth..10 00

—— The Design and Construction of Harbors. A Treatise on Maritime Engineering. Third edition with 24 plates, 8vo, cloth.......................... 9 00

STEWART (R. W.). A Text Book of Light, Adapted to the Requirements of the Intermediate Science and Preliminary Scientific Examinations of the University of London, and also for General Use, Numerous Diagrams and Examples. 12mo, cloth.. 1 00

STEWART (R. W.). A Text Book of Heat, Illustrated, 8vo, cloth.. 1 00

—— A Text Book of Magnetism and Electricity, 160 Illus. and Numerous Examples. 12mo, cloth....... 1 00

STILES (AMOS). Tables for Field Engineers. Designed for use in the field. Tables containing all the functions of a one degree curve, from which a corresponding one can be found for any required degree. Also, Tables of Natural Sines and Tangents. 12mo, morocco, tucks 2 00

STILLMAN (PAUL). Steam Engine Indicator and the Improved Manometer Steam and Vacuum Gauges; their Utility and Application. New edition. 12mo, flexible cloth 1 00

STONE (General ROY). New Roads and Road Laws in the United States. 200 pages, with numerous illustrations. 12mo, cloth 1 00

STUART (C. B., U. S. N.). Lives and Works of Civil and Military Engineers of America. With 10 steel-plate engravings. 8vo, cloth 5 00

—— The Naval Dry Docks of the United States. Illustrated with 24 fine Engravings on Steel. Fourth edition. 4to, cloth 6 00

SWINTON (ALAN A. CAMPBELL). The Elementary Principle of Electric Lighting. Illustrated. 12mo, cloth 60

TEMPLETON (WM.). The Practical Mechanic's Work-shop Companion. Comprising a great variety of the most useful rules and formulæ in Mechanical Science, with numerous tables of practical data and calculated results facilitating mechanical operations. Revised and enlarged by W. S. Hutton. 12mo, morocco 2 00

THOM (CHAS.), and WILLIS H. JONES. Telegraphic Connections: embracing Recent Methods in Quadruplex Telegraphy. Oblong, 8vo, cloth. 20 full page plates, some colored 1 50

THOMPSON (EDWARD P., M. E.). How to Make Inventions; or Inventing as a Science and an Art. A Practical Guide for Inventors. Second edition. 8vo, boards 1 00

—— Roentgen Rays and Phenomena of the Anode and Cathode Principles, Applications and Theories. For Students, Teachers, Physicians, Photographers, Electricians and others. Assisted by Louis M. Pignolet, N. D. C. Hodges, and Ludwig Gutmann, E. E. With a Chapter on Generalizations, Arguments, Theories, Kindred Radiations and Phenomena. By Professor Wm. Anthony. 8vo, cloth. 50 Diagrams, 40 Half tones 1 50

TODD (JOHN), and W. B. WHALL. Practical Seamanship for Use in the Merchant Service: Including all ordinary subjects; also Steam Seamanship, Wreck Lifting, Avoiding Collision, Wire Splicing, Displacement, and everything necessary to be known by seamen of the present day. Second edition, with 247 illustrations and diagrams. 8vo, cloth.......... 8 40

TOOTHED GEARING. A Practical Hand-book for Offices and Workshops. By a Foreman Patternmaker. 184 Illustrations. 12mo, cloth 2 25

TRATMAN (E. E. RUSSELL). Railway Track and Track Work. With over two hundred illustrations. 8vo, cloth 3 00

TREVERT (EDWARD). How to Build Dynamo-Electric Machinery, embracing Theory Designing and Construction of Dynamos and Motors. With appendices on Field Magnet and Armature Winding, Management of Dynamos and Motors, and Useful Tables of Wire Gauges. Illustrated. 8vo, cloth 2 50

——— Electricity and its Recent Applications. A Practical Treatise for Students and Amateurs, with an Illustrated Dictionary of Electrical Terms and Phrases. Illustrated. 12mo, cloth.................. 2 00

TUCKER (Dr. J. H.). A Manual of Sugar Analysis, including the Applications in General of Analytical Methods to the Sugar Industry. With an Introduction on the Chemistry of Cane Sugar, Dextrose, Levulose, and Milk Sugar. 8vo, cloth. Illustrated. 8 05

TUMLIRZ (Dr. O.). Potential and its Application to the Explanation of Electric Phenomena, Popularly Treated. Translated from the German by D. Robertson. Illustrated. 12mo, cloth.......... .... 1 25

TUNNER (P. A.). Treatise on Roll-Turning for the Manufacture of Iron. Translated and adapted by John B. Pearse, of the Pennsylvania Steel Works, with numerous engravings, wood-cuts. 8vo, cloth, with folio atlas of plates............... .... .10 00

URQUHART (J. W.). Electric Light Fitting. Embodying Practical Notes on Installation Management. A Hand-book for Working Electrical Engineers—with numerous illustrations. 12mo, cloth........ . 2 00

——— Electro-Plating. A Practical Hand-book on the Deposition of Copper, Silver, Nickel, Gold, Brass, Aluminum, Platinum, etc. Fourth edition. 12mo.. 2 00

URQUHART, (J. W.). Dynamo Construc-tion: a Practical Hand book for the Use of Engineer Constructors and Electricians in Charge, embracing Frame Work Building, Field Magnet and Armature Winding and Grouping, Compounding, etc., with Examples of Leading English, American and Continental Dynamos and Motors, with numerous illustrations. 12mo, cloth 3 00

—— Electric Ship Lighting. A Hand-book on the Practical Fitting and Running of Ship's Electrical Plant. For the Use of Ship Owners and Builders, Marine Electricians and Sea Going Engineers-in-Charge. Numerous illustrations. 12mo, cloth 3 00

UNIVERSAL TELEGRAPH CIPHER CODE. Arranged for General Correspondence. 12mo, cloth. 1 00

VAN NOSTRAND'S ENGINEERING MAGAZINE. Complete sets, 1869 to 1886 inclusive.
Complete sets, 35 vols., in cloth 60 00
Complete sets, 35 vols., in half morocco 100 00

VAN WAGENEN (T. F.). Manual of Hydraulic Mining. For the Use of the Practical Miner. Revised and enlarged edition. 18mo, cloth 1 00

WALKER (SIDNEY F.). Electric Lighting for Marine Engineers, or How to Light a Ship by the Electric Light and How to Keep the Apparatus in Order. 103 illustrations 8vo, cloth. Second edition. 2 00

WALLIS-TAYLER (A. J.). Modern Cycles. A Practical Hand-book on their Construction and Repair. With 300 illustrations. 8vo, cloth 4 00

—— Motor Cars, or Power Carriages for Common Roads. 8vo, cloth, with numerous illustrations. 1 80

—— Bearings and Lubrication. A Hand book for every user of Machinery. 8vo, cloth, fully illustrated 1 50

—— Refrigerating and Ice-Making Machinery. A Descriptive Treatise for the use of persons employing refrigerating and ice-making installations and others. 8vo, cloth. Illustrated 3 00

—— Sugar Machinery. A Descriptive Treatise, Devoted to the Machinery and Apparatus used in the Manufacture of Cane and Beet Sugars. 12mo, cloth. Illustrated 2 00

WANKLYN (J. A.). A Practical Treatise on the Examination of Milk and its Derivatives, Cream, Butter, and Cheese. 12mo, cloth.......... .. 1 00

—— Water Analysis. A Practical Treatise on the Examination of Potable Water. Tenth Edition. 12mo, cloth 2 00

WANSBROUGH (WM. D.). The A. B. C. of the Differential Calculus. 12mo, cloth.... .... 1 50

WARD (J. H.). Steam for the Million. A Popular Treatise on Steam, and its application to the Useful Arts, especially to Navigation. 8vo, cloth 1 00

WARING (GEO. E., Jr.). Sewerage and Land Drainage. Illustrated with wood-cuts in the text, and full-page and folding plates Quarto. Cloth. Third edition...... 6 00

—— Modern Methods of Sewage Disposal for Towns Public Institutions and Isolated Houses. Second edition, revised and enlarged. 260 pages. Illustrated. Cloth.......... .... 2 00

—— How to Drain a House. Practical Information for Householders. New and enlarged edition. 12mo, cloth 1 25

WATSON (E. P.). Small Engines and Boilers. A Manual of Concise and Specific Directions for the Construction of Small Steam Engines and Boilers of Modern Types from five Horse-power down to model sizes. 12mo, cloth. Illustrated with Numerous Diagrams and Half Tone Cuts. New York, 1899 ..... . 1 25

WATT (ALEXANDER). Electro-Deposition. A Practical Treatise on the Electrolysis of Gold, Silver, Copper, Nickel, and other Metals, with Descriptions of Voltaic Batteries, Magneto and Dynamo-Electric Machines, Thermopiles, and of the Materials and Processes used in every Department of the Art, and several chapters on Electro Metallurgy With numerous illustrations. Third edition, revised and corrected. Crown, 8vo, 568 pages 3 50

—— Electro-Metallurgy Practically Treated. Tenth edition, considerably enlarged. 12mo, cloth. 1 00

—— The Art of Soap-Making. A Practical Hand-book of the Manufacture of Hard and Soft Soaps, Toilet Soaps, &c. Including many New Processes, and a Chapter on the Recovery of Glycerine from Waste Leys. With illustrations. Fourth edition, revised and enlarged. 8vo.................................. 3 00

WATT (ALEXANDER). The Art of Leather Manufacture. Being a Practical Hand-book, in which the Operations of Tanning, Currying, and Leather Dressing are Fully Described, and the Principles of Tanning Explained, and many Recent Processes Introduced. With numerous illustrations. Second edition. 8vo, cloth 4 00

WEALE (JOHN). A Dictionary of Terms Used in Architecture, Building, Engineering, Mining, Metallurgy, Archaeology, the Fine Arts etc., with explanatory observations connected with applied Science and Art. Fifth edition, revised and corrected. 12mo, cloth 2 50

—— Weale's Rudimentary Scientific Series (Catalogue sent on application).

WEBB (HERBERT LAWS). A Practical Guide to the Testing of Insulated Wires and Cables. Illustrated. 12mo, cloth.................................. 1 00

—— The Telephone Hand-book. 128 illustrations. 146 pages. 16mo, cloth 1 00

WEEKES (R. W.). The Design of Alternate Current Transformers. Illustrated. 12mo, cloth............ 1 00

WEISBACH (JULIUS). A Manual of Theoretical Mechanics. Ninth American edition. Translated from the fourth augmented and improved German edition, with an Introduction to the Calculus by Eckley B. Coxe, A. M., Mining Engineer. 1,100 pages, and 902 wood-cut illustrations. 8vo, cloth 6 00

Sheep 7 50

WESTON (EDMUND B.). Tables Showing Loss of Head Due to Friction of Water in Pipes. Second edition. 12mo, cloth........ .... 1 50

WEYMOUTH (F. MARTEN). Drum Armatures and Commutators. (Theory and Practice.) A complete Treatise on the Theory and Construction of Drum Winding, and of commutators for closed-coil armatures, together with a full resume of some of the principal points involved in their design, and an exposition of armature re-actions and sparking. 8vo, cloth.............. .... 3 00

WEYRAUCH (J. J.). Strength and calculations of Dimensions of Iron and Steel Construction, with reference to the Latest Experiments. 12mo, cloth, plates 1 00

WHEELER (Prof. J. B.). Art of War. A Course of Instruction in the Elements of the Art and Science of War, for the Use of the Cadets of the United States Military Academy, West Point, N. Y. 12mo, cloth.... 1 75

—— Field Fortifications. The Elements of Field Fortifications, for the Use of the Cadets of the United States Military Academy, West Point, N. Y. 12mo. 1 75

WHIPPLE (S., C. E.). An Elementary and Practical Treatise on Bridge Building. 8vo, cloth.... 3 00

WILKINSON (H. D.). Submarine Cable-Laying, Repairing and Testing. 8vo, cloth.... 4 00

WILLIAMSON (R. S.). On the Use of the Barometer on Surveys and Reconnoissances. Part I Meteorology in its Connection with Hypsometry. Part II. Barometric Hypsometry. With illustrative tables and engravings, 4to, cloth.... 15 00

WILLIAMSON (E. S.). Practical Tables in Meteorology and Hpsometry, in connection with the use of the Barometer. 4to, cloth.... 2 50

WILSON (GEO.). Inorganic Chemistry, with New Notation. Revised and enlarged by H. G. Madan. New edition. 12mo, cloth.... 2 00

WOODBURY (D. V.). Treatise on the Various Elements of Stability in the Well-Proportioned Arch. 8vo, half morocco.... 4 00

WRIGHT (T. W.). A Treatise on the Adjustment of Observations. With applications to Geodetic Work, and other Measures of Precision. 8vo, cloth.... 4 00

—— Elements of Mechanics; including Kinematics, Kinetics and Statics. With application. 8vo, cloth.. 2 50

WYLIE (CLAUDE). Iron and Steel Founding. Illustrated with 39 diagrams. Second edition, revised and enlarged. 8vo, cloth.... 2 00

WYNKOOP (RICHARD). Vessels and Voyages, as Regulated by Federal Statutes and Treasury Instructions and Decisions. 8vo, cloth.... 2 00

YOUNG (J. ELTON). Electrical Testing for Telegraph Engineers, with Appendices consisting of Tables. 8vo, cloth. Illustrated.... 4 00

YOUNG SEAMAN'S MANUAL. Compiled from Various Authorities, and Illustrated with Numerous Original and Select Designs, for the Use of the United States Training Ships and the Marine Schools. 8vo, half roan.... 3 00

THE VAN NOSTRAND SCIENCE SERIES.

No. 60.—STRENGTH OF WROUGHT-IRON BRIDGE MEMBERS. By S. W. Robinson, C.E.

No. 61.—POTABLE WATER AND METHODS OF DETECTING IMPURITIES. By M. N. Baker.

No. 62.—THE THEORY OF THE GAS-ENGINE. By Dougald Clerk. Second edition. With additional matter. Edited by F. E. Idell, M.E.

No. 63.—HOUSE DRAINAGE AND SANITARY PLUMBING. By W. P. Gerhard. Sixth edition. Revised.

No. 64.—ELECTRO-MAGNETS. By A. N. Mansfield.

No. 65.—POCKET LOGARITHMS TO FOUR PLACES OF DECIMALS.

No. 66.—DYNAMO-ELECTRIC MACHINERY. By S. P. Thompson. With notes by F. L. Pope. Third edition.

No. 67.—HYDRAULIC TABLES BASED ON "KUTTER'S FORMULA." By P. J. Flynn.

No. 68.—STEAM-HEATING. By Robert Briggs. Third edition, revised, with additions by A. R. Wolff.

No. 69.—CHEMICAL PROBLEMS. By Prof. J. C. Foye. Third edition, revised and enlarged.

No. 70.—EXPLOSIVE MATERIALS. John P. Wisser, U. S. A.

No. 71.—DYNAMIC ELECTRICITY. By John Hopkinson, J. N. Shoolbred, and R. E. Day.

No. 72.—TOPOGRAPHICAL SURVEYING. By George J. Specht, Prof. A. S. Hardy, John B. McMaster, and H. F. Walling.

No. 73.—SYMBOLIC ALGEBRA; OR, THE ALGEBRA OF ALGEBRAIC NUMBERS. By Prof. W. Cain.

No. 74.—TESTING MACHINES: THEIR HISTORY, CONSTRUCTION, AND USE. By Arthur V. Abbott.

No. 75.—RECENT PROGRESS IN DYNAMO-ELECTRIC MACHINES. Being a Supplement to Dynamo-Electric Machinery. By Prof. Sylvanus P. Thompson.

No. 76.—MODERN REPRODUCTIVE GRAPHIC PROCESSES. By Lieut. James S. Pettit, U.S.A.

No. 77.—STADIA SURVEYING. The Theory of Stadia Measurements. By Arthur Winslow.

No. 78.—THE STEAM-ENGINE INDICATOR, AND ITS USE. By W. B. Le Van.

No. 79.—THE FIGURE OF THE EARTH. By Frank C. Roberts, C.E.

No. 80.—HEALTHY FOUNDATIONS FOR HOUSES. Glenn Brown.

No. 81.—WATER METERS: COMPARATIVE TESTS OF ACCURACY, DELIVERY, ETC. Distinctive features of the Worthington, Kennedy, Siemens, and Hesse meters. By Ross E. Browne.

No. 82—THE PRESERVATION OF TIMBER BY THE USE OF ANTISEPTICS. By Samuel Bagster Boulton, C. E.

No. 83.—MECHANICAL INTEGRATORS. By Prof. Henry S. H. SHAW, C. E.

No. 84.—FLOW OF WATER IN OPEN CHANNELS, PIPES, CONDUITS, SEWERS, ETC. With Tables. By P. J. Flynn, C. E.

No. 85.—THE LUMINIFEROUS ÆTHER. By Prof. de Volson Wood.

No. 86.—HAND-BOOK OF MINERALOGY: DETERMINATION AND DESCRIPTION OF MINERALS FOUND IN THE UNITED STATES. By Prof. J. C. Foye. Fourth edition, revised.

No. 87.—TREATISE ON THE THEORY OF THE CONSTRUCTION OF HELICOIDAL OBLIQUE ARCHES. By John L. Culley, C. E.

No. 88.—BEAMS AND GIRDERS. Practical Formulas for their Resistance. By P. H. Philbrick.

No. 89.—MODERN GUN COTTON: ITS MANUFACTURE, PROPERTIES, AND ANALYSIS. By Lieut. John P. Wisser, U. S. A.

No. 90.—ROTARY MOTION AS APPLIED TO THE GYROSCOPE. By Gen. J. G. Barnard.

No. 91.— LEVELING: BAROMETRIC TRIGONOMETRIC AND SPIRIT. By Prof. I. O. Baker.

No. 92.—PETROLEUM: ITS PRODUCTION AND USE. By Boverton Redwood, F. I. C., F. C. S.

No. 93.—RECENT PRACTICE IN THE SANITARY DRAINAGE OF BUILDINGS. With Memoranda on the Cost of Plumbing Work. Second edition, revised. By William Paul Gerhard, C. E.

No. 94.—THE TREATMENT OF SEWAGE. By Dr. C. Meymott Tidy.

No. 95.—PLATE GIRDER CONSTRUCTION. By Isami Hiroi, C. E. 2d edition, revised and enlarged.

No. 96.—ALTERNATE CURRENT MACHINERY. By Gisbert Kapp, Assoc. M. Inst., C. E.

No. 97.— THE DISPOSAL OF HOUSEHOLD WASTES. By W. Paul Gerhard, Sanitary Engineer.

No. 98.—PRACTICAL DYNAMO BUILDING FOR AMATEURS, HOW TO WIND FOR ANY OUTPUT. By Frederick Walker. Fully illustrated.

No. 99—TRIPLE - EXPANSION ENGINES AND ENGINE TRIALS. By Prof. Osborne Reynolds. Edited, with notes, etc., by F. E. Idell, M. E.

THE VAN NOSTRAND SCIENCE SERIES.

No. 100.—HOW TO BECOME AN ENGINEER, or the Theoretical and Practical Training necessary in fitting for the duties of the Civil Engineer. By Prof. Geo. W. Plympton.

No. 101.—THE SEXTANT, and other Reflecting Mathematical Instruments. With Practical Hints for their adjustment and use. By F. R. Brainard, U. S. Navy.

No. 102.—THE GALVANIC CIRCUIT INVESTIGATED MATHEMATICALLY. By Dr. G. S. Ohm, Berlin, 1827. Translated by William Francis. With Preface and Notes by the Editor, Thomas D. Lockwood, M.I.E.E.

No. 103.—THE MICROSCOPICAL EXAMINATION OF POTABLE WATER. With Diagrams. By Geo. W. Rafter.

No. 104.—VAN NOSTRAND'S TABLE BOOK FOR CIVIL AND MECHANICAL ENGINEERS. Compiled by Prof. Geo. W. Plympton.

No. 105.—DETERMINANTS. An Introduction to the Study of, with Examples and Applications. By Prof. G. A. Miller.

No. 106.—COMPRESSED AIR. Experiments upon the Transmission of Power by Compressed Air in Paris. (Popp's System.) By Prof. A. B. W. Kennedy. The Transmission and Distribution of Power from Central Stations by Compressed Air. By Prof. W. C. Unwin.

No. 107.—A GRAPHICAL METHOD FOR SWING-BRIDGES. A Rational and Easy Graphical Analysis of the Stresses in Ordinary Swing-Bridges. With an Introduction on the General Theory of Graphical Statics. By Benjamin F. La Rue. 4 Plates.

No. 108.—SLIDE VALVE DIAGRAMS. A French Method for Constructing Slide Valve Diagrams. By Lloyd Bankson, B.S., Assistant Naval Constructor, U. S. Navy. 8 Folding Plates.

No. 109.—THE MEASUREMENT OF ELECTRIC CURRENTS. Electrical Measuring Instruments. By James Swinburne. Meters for Electrical Energy. By C. H. Wordingham. Edited, with Preface, by T. Commerford Martin. Folding Plate and numerous illustrations.

No. 110.—TRANSITION CURVES. A Field-Book for Engineers, containing Rules and Tables for Laying out Transition Curves. By Walter G. Fox, C.E.

No. 111.—GAS-LIGHTING AND GAS-FITTING. Specifications and Rules for Gas-Piping. Notes on the advantages of Gas for Cooking and Heating, and Useful Hints to Gas Consumers. Second edition, rewritten and enlarged. By Wm. Paul Gerhard, C. E.

No. 112.—A PRIMER ON THE CALCULUS. By E. Shern Gould, M. Am. Soc. C. E.

TEXT BOOKS

—FOR—

Colleges and Technological Instituti

THEORETICAL MECHANICS,

With an Introduction to the Calculus. [illegible]
Text Book for Technical Schools and Colleges, and
use of Engineers, Architects, &c. By Julius We
Ph. D. Translated from the German by Eckley B.
A. M., Mining Engineer. One Volume, large 8v
pages and Illustrations. Cloth, [illegible] Sheep,

The Graphical Statics of Mechanism.

A Guide for the use of Machinists, Architects an
gineers; and also a Text-Book for Technical Scho
Gustav Herrmann, Professor in the Royal Poly
School at Aix-la-Chapelle. Translated and annota
A. P. Smith, M. E. Fourth Ed. [illegible]

Elementary Mechanics,

Text Book for Students of Mechanics. [illegible]
[illegible] P. Wood, Assistant Engineer U. S.
[illegible] Professor of Mechanical Engineering,
[illegible] University, etc., and Albert W. Stahl,
Assistant Engineer U. S. Navy, Professor of Me
Engineering, Purdue University, La Fayette, Ind.
Fourth Edition. 12mo, cloth, illustrated, [illegible]

Elements of Mechanics,

Including Kinematics, Kinetics and Statics. With
cations. By Professor T. W. Wright, of Union C
Third edition revised. 8vo, cloth, illustrated, [illegible]

Bowser's Analytic Mechanics.

An Elementary Treatise on Analytic Mechanics,
numerous examples. By Edw. A. Bowser, L
[illegible] Edition. 12mo, cloth [illegible]

Elementary Mechanics, including Hydro
and Pneumatics.

By Professor Oliver J. Lodge. [illegible]
cloth, illustrated [illegible]

Applied Mechanics.

A Treatise for the Use of Students who have
Work Experimental, Numerical, and Graphical E
Illustrating the Subject. By John Perry, M. E.,
F. R. S. 8vo, cloth, [illegible]